



M  RE

POWER SAVER + BRIGHT + RELIABLE



About Us

StaRay LED provides complete lighting solutions for home and offices, Industrial Lighting, Outdoor Lighting etc.

Our product range includes a wide range of LED Bulbs, LED Tube Lights, LED down Light, LED Street lights, LED Hi-bay, LED Low-bay, LED Flood Light, LED Flameproof Light, LED RGB Flood Light, Sensors, LED Drivers, LED Luminaries etc. in different models and wattage, we have a full-fledged R&D centre to provide customized solutions. We also give services as an OEM for others brands. that will work best not only in India but globally.



StaRay LED, which is a division of Calibrate India, is a leading manufacturer of LED Lights and Electronic Weighing Machines. With more than 70 years of experience, our products has become the symbol and synonym of Accuracy and Durability to our Innumerable Customers. We feel privileged to have the opportunity to work with your esteemed organization. Please register us on your supplier's record. If you have any further queries, we shall be pleased to answer them. Happy to be at your service.

Our Products :

StaRay LED Bulb

WATTAGE	COLOR TEMP.	HOLDER
9W	CW NW WW	B22 E27
12W	CW NW WW	B22 E27
15W	CW NW WW	B22 E27
20W	CW NW WW	B22 E27
30W	CW NW WW	B22 E27
40W	CW NW WW	B22 E27
50W	CW NW WW	B22 E27



StaRay LED Tube Light

MODEL	WATT.	COLOR TEMP.
Virat 20	20 W	CW WW
Retro Fit 18	18 W 20 W	CW WW
TL 40	40 W	CW WW
Tri Proof 40	40 W	CW WW



StaRay Industrial Tri Proof Tubelight

- > LED size SMD.
- > IP rating 65.
- > Color temperature 3000,4000 & 6500K.
- > Surface Mounting.
- > Extruded aluminium enclosure.
- > Beam angle 120 Deg.
- > 2 years warranty.

CODE	DIMENSIONS(mm)	WATTAGE	LUMEN OUTPUT
SR TP 40	1200 x 90 x 74	40	> 4000 lm
SR TP 60	1200 x 90 x 74	60	> 6000 lm
SR TP 80	1200 x 90 x 74	80	> 8000 lm



StaRay Down Light (Square, Round)

- > IP rating 20
- > Color temperature 3000/4000/6500K
- > False ceiling Mounting.
- > Beam angle 120 Deg.
- > 2 years warranty.



CODE	DIMENSIONS(mm)	CO(mm)	WATTAGE	LED LUMENS
SR DL 3	88 x 25	70	3	120 lm / Watt
SR DL 6	120 x 25	105	6	120 lm / Watt
SR DL 12	170 x 25	150	12	120 lm / Watt
SR DL 15	224 x 20	208	15	120 lm / Watt
SR DL 18	224 x 20	208	18	120 lm / Watt

StaRay Surface Down Light


- > IP rating 20
- > Color temperature 3000/4000/6500K
- > Lumen output >120 lm | >360 lm | >840 lm | >1260 lm
- > False ceiling Mounting.
- > Beam angle 120 Deg.
- > 2 years warranty.



CODE	DIMENSIONS(mm)	CO(mm)	WATTAGE	LED LUMENS
SR DL 3	88 x 25	70	3	120 lm / Watt
SR DL 6	120 x 25	105	6	120 lm / Watt
SR DL 12	170 x 25	150	12	120 lm / Watt
SR DL 15	224 x 20	208	15	120 lm / Watt
SR DL 18	224 x 20	208	18	120 lm / Watt

StaRay Flood Light NEO

- > IP rating 66.
- > Color temperature 3000/4000/6600K.
- > Wall, ceiling & Surface Mounting.
- > Pressure die cast aluminum enclosure.
- > Beam angle 120 Deg.
- > 2 years warranty.

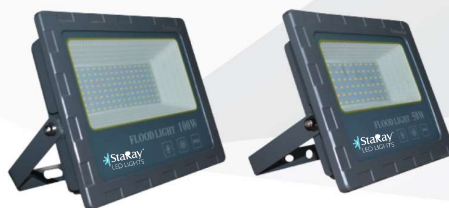

CODE	DIMENSIONS(mm)	WATTAGE	LUMEN OUTPUT
NEO 50	235 X 190 X 45	50	> 10400 lm
NEO 100	295 X 230 X 65	100	> 12000 lm
NEO 150	340 X 270 X 70	150	> 12000 lm
NEO 200	342 X 310 X 70	150	> 12000 lm

StaRay Flood Light Flame FLN

- > IP rating 66.
- > Color temperature 3000/4000/6600K.
- > Wall, ceiling & Surface Mounting.
- > Pressure die cast aluminum enclosure.
- > Beam angle 120 Deg.
- > 2 years warranty.



CODE	DIMENSIONS(mm)	WATTAGE	LUMEN OUTPUT
FLN 100	355 x 292 x 82	100	> 10400 lm
FLN 120	355 x 292 x 82	120	> 12000 lm
FLN 150	425 x 320 x 90	150	> 12000 lm

StaRay Flood Light Reva

- > LED Type SMD
- > IP rating 65
- > Color temperature 3000/4000/6000K.
- > Wall, ceiling & Surface Mounting.
- > Pressure die cast aluminium enclosure.
- > 2 years warranty.



CODE	DIMENSIONS(mm)	WATTAGE	LUMEN OUTPUT
REVA 50/60	240 x 185 x 35	50 / 60	> 5000 lm
REVA 180	345 x 307 x 35	180	> 15000 lm
REVA 240	396 x 383x 58	240	> 20000 lm

StaRay High Mast

FLAME 300 / 400

- > LED type SMD.
- > IP rating 65
- > Color temperature 3000/4000/6700K.
- > Wall, Ceiling & Surface.
- > Fabricated aluminium .



CODE	DIMENSIONS(mm)	WATTAGE	LUMEN OUTPUT
Flame 300	435 x 350	300	> 30000 lm
Flame 400	455 x 440	400	> 40000 lm

StaRay Highbay

RIGEL HIGHBAY

- > LED size SMD.
- > IP rating 54.
- > Color temperature 3000,4000 & 6500K.
- > Suspension Mounting.
- > Extruded aluminium heat sink with fabricated dome .
- > Beam angle 120 Deg.
- > 2 years warranty.



CODE	DIMENSIONS(mm)	WATTAGE	LUMEN OUTPUT
Rigel 100	340 x 290	100	> 10000 lm
Rigel 200	390 x 460	200	> 20000 lm

StaRay Highbay

UFO HIGHBAY

- > LED type SMD.
- > IP rating 65.
- > Color temperature 2700-6500K.
- > Wall, pole & Surface Mounting.
- > Pressure die casting efficient aluminum fins.
- > Beam angle 93 Deg, 84 Deg , 83 Deg , 88 Deg.
- > 2 years warranty.



CODE	DIMENSIONS(mm)	WATTAGE	LUMEN OUTPUT
UFO 50	228 x 155	50	> 5000 lm
UFO 100	310 x 160	100	> 10000 lm
UFO 150	357 x 165	150	> 15000 lm
UFO 200	407 x 165	200	> 20000 lm

StaRay LED Street Light

ALPHA

- > LED type SMD.
- > IP rating 65.
- > Color temperature 3000/4000/6500K.
- > Pole Mounting.
- > Pressure die cast aluminium enclosure.
- > 2 years warranty.



CODE	DIMENSIONS(mm)	WATTAGE	LUMEN OUTPUT
ALPHA 30	330 x 115 x 40	30	>3600 lm
ALPHA 40	360 x 115 x 40	40	>4320 lm
ALPHA 60	445 x 150 x 40	60	>6000 lm
ALPHA 90	465 x 150 x 40	90	>8400 lm
ALPHA 120	562 x 180 x 75	120	>10800 lm
ALPHA 250	395 X 370 X 50	250	>14400 lm

POLARIS PLUS

- > LED type SMD.
- > IP rating 67.
- > Color temperature 3000/4000/6500K.
- > Pole Mounting.
- > Pressure die cast aluminium enclosure .
- > Batwing distribution street light.
- > 2 years warranty.



CODE	DIMENSIONS(mm)	WATTAGE	LUMEN OUTPUT
POLARIS 50	390 x 165 x 60	50	>5500 lm
POLARIS 100	725 x 285 x 70	100	>11000 lm

Our Clients :



Our Other Products :



Contact Details

StarRay LED Lights

📍 233, Shastri market, 2nd floor,
Indore, (M.P.) 452007

☎ 98260-11619, 0731-2536919

🌐 www.ledstaray.com

📧 starayled@gmail.com



* Due To Continues Product Development Specifications &
Models Are Subject To Change Without Prior Notice.
* All Rights Reserved By Calibrate India.
* Conditions Apply.