



We have an experienced team of Fiber Laser Marking & Engraving Machines. Dorevo Laser is a Subsidiary of Synchronize Laser Marking Solution. We are into Laser Industries Since 2015.



CONTACT US

Address:

Somant Industrial Area,
Nr. Shreenathji Auto, Khodaldham
Chowk, Kothariya, Rajkot-360004

Phone:

+91 96010 10402
+91 9898704945

Mail:

dorevoind@gmail.com

LASER **MACHINES**

Mark Your Identity



FIBER LASER MARKING

Specification:

Power Output: 20/30/50/100 Watt
Marking Speed: ≤ 9000
Repeated Accuracy: 0.001mm
Wave Length: 1064nm (± 10 nm)
Marking Depth: 1.5mm Dep. on Materials
Min. Line Char.: 0.2mm
Supply Voltage: AC 110V-230V, 50Hz
Best Operation Temp.: 10-35°C
Laser Generator Life: 50,000 - 1,00,000 Hours
Software: EZCAD



JEWELLERY WELDING

Specification:

Power Output: 200/300 Watt
Laser Type: Nd. YAG
Pulse Width: ≤ 20 ms
Wave Length: 1064um
Beam Diameter: 0.1-3mm
Observing System: Microscope 10X
Supply Voltage: AC 110V-230V, 50Hz
Shield Gas Supply: Argon
Cooling System: Chiller

Specification:

Power Output: 10/30/60 Watt
Marking Speed: ≤ 8000
Repeated Accuracy: 0.01mm
Wave Length: 10.6um
Marking Depth: 3mm Dep. on Materials
Min. Line Char.: 0.4mm
Supply Voltage: AC 110V-230V, 50Hz
Best Operation Temp.: 10-28°C
Laser Generator Life: 30,000s Hours
Software: EZCAD

Co2 LASER MARKING



Specification:

Power Output: 1000/1500 Watt
Collimated Focal Length: 50mm
Focusing Focal Length: 100mm
Wave Length: 1080um
Gas Source: 0.2 Mpa (Argon, Nitrogen)
Power Stability: $\pm 1.5\%$
Supply Voltage: AC 380V, 50Hz
Fiber Core Diameter: 25mm
Cooling System: Chiller
Cable Length: 10mtr.


FIBER LASER WELDING



FLY(ONLINE) MARKING

Specification:

Power Output: 30/50 Watt
Marking Speed: ≤ 9000
Repeated Accuracy: 0.001mm
Wave Length: 1064nm (± 10 nm)
Laser Generator Life: 50,000 - 1,00,000 Hours
Min. Line Char.: 0.2mm
Supply Voltage: AC 110V-230V, 50Hz
Best Operation Temp.: 10-35°C
Software: EZCAD

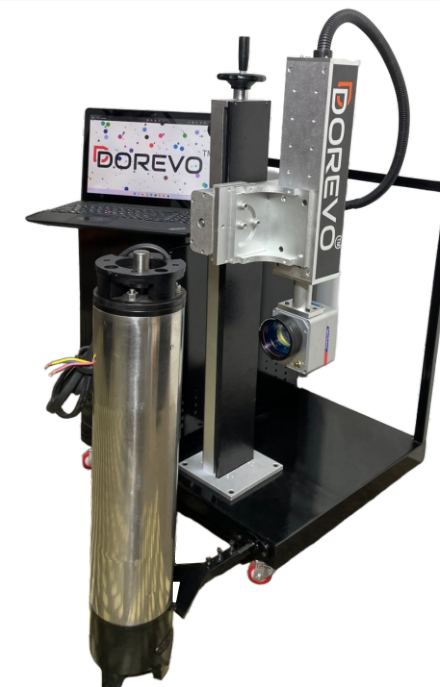

PUMP MOTOR MARKING

Specification:

Power Output: 20/30/50/100 Watt
Marking Speed: ≤ 9000
Repeated Accuracy: 0.001mm
Wave Length: 1064nm (± 10 nm)
Marking Depth: 1.5mm Dep. on Materials
Min. Line Char.: 0.2mm
Supply Voltage: AC 110V-230V, 50Hz
Best Operation Temp.: 10-35°C
Laser Generator Life: 50,000 - 1,00,000 Hours
Software: EZCAD