

HITACHI
Inspire the Next¹

Ink Jet Printer


UX-B160WG



Standard Specification

Item		Small characters
		UX-B160WG
Nozzle size		65µm
Max. print line number		Up to 4 lines
Maximum number of print characters		Up to 240 characters
Font (Horizontal x Vertical)	5x5	✓
	5x7(8), 9x7(8)	✓
	7x10	✓
	10x12	✓
	12x16	✓
	18x24	✓
	24x32	✓
Character height		2-10 mm
Display & input device		WYSIWYG design Display: TFT LCD (10.4" monochrome), backlight provided Input device: Touch panel, input sound provided
Screen language		English
Maximum print rate (Characters per second) (Font 5x5, space 1, 1 line)		Up to 1,148
Standard characters		Alphanumeric (A-Z, a-z, 0-9) , symbols (27) and space: Total 90
User pattern		50 patterns each for dot matrix
Print functions		Calendar, Count, Font mixture, Password
Message storage capacity		150 messages
External memory		USB for user data storage
Head cable length / angle		4m (in-line/90 degrees)
Operating temperature range		10-45°C (1067K Ink)
Operating humidity range		30-90% RH (No condensation)
Power supply (Automatic voltage selection)		AC100-120/220-240V±10% 50/60Hz 120VA
Approval		BIS
Dimensions (Width x Depth x Height)		400 x 320 x 527 mm
International protection		IP55
Approximate weight		25kg
Wiring of power supply		Terminal block

Main unit / Printhead dimension

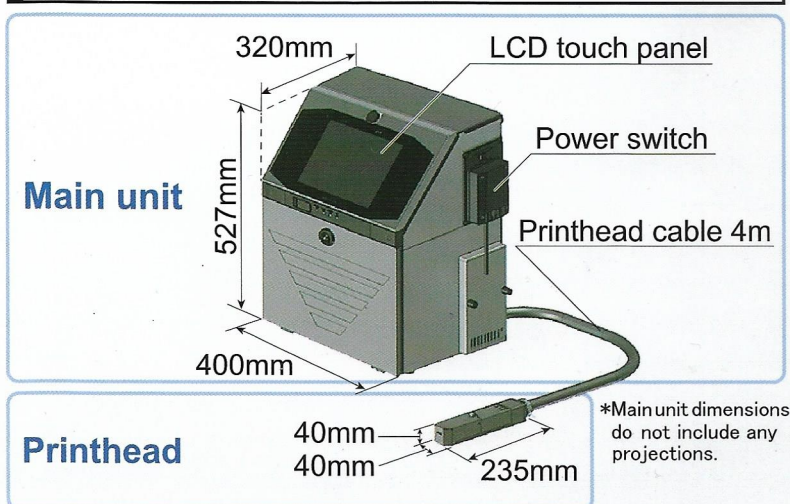

Information in this brochure is subject to change without notice.

Hitachi Industrial Equipment Systems Co., Ltd.

For further information, please contact your nearest sales representative.



Premium Coding Solutions

UG - 02, Classic Diamond, WB - 94, Sch. No.94, Vijay Nagar, Indore (MP) 452 010.
Email: info@premiumcodingsolutions.in | Web: www.premiumcodingsolutions.com
Tel.: 0731- 4978060 | Mob.: +91 9109958391



Registration number: JQA-QMA12087

Registration date: April 1, 2005

Hitachi Industrial Equipment Systems Co., Ltd.
(Taga Administrative Division) obtained international standard ISO 9001 certification for the quality assurance of the Ink Jet Printer contained in this brochure.