



HYDRAULIC NUT SPLITTER

The Clean Cut Solution to Removing Frozen Nuts.



SAPSONS NUT-SPLITTER Now you can easily remove heavily corroded, seized nuts quickly, quietly and safely.

FAST : To remove a 90 mm nut with a torch or hammer and chisel might take up to 30 minutes. But you only need 20-30 seconds with our SAPSONS NUT SPLITTER.

SAFE : No hammers. No impact. Operator has hands off during operation. No sparks. No flame. No risk to volatile environments. SAPSONS NUT SPLITTER cuts smoothly, with no flying fragments.



QUIET : All you will hear is the hiss of the hydraulic pump and a reassuring "snap" when the nut is split.

PRECISE : You can easily calibrate the cutting chisel so only the nut is split, with no damage to the bolt or stud threads.



VERSATILE : SAPSONS NUT SPLITTER cuts through even the hardest nuts, including ASTM A194 Brinell hardness 248-352. And each model of SAPSONS NUT SPLITTER can be used for a wide range of metric or inch nut sizes.

IT SAVES YOU MONEY : Nut removal takes less time, so downtime is reduced. And with SAPSONS NUT SPLITTER, you can avoid costly damage to bolts, studs and surrounding equipment.

SAPSONS NUT SPLITTER OUTPERFORMS AND OUTLASTS THE COMPETITION.

Standard Straight Head Models

MODEL	STUD DIA IN (MM)	NUT A/F IN (MM)	A MM	B MM	C MM	D MM	E MM	F MM	WEIGHT KG.
SS 36	7/16"-7/8" (11-22)	5/8"-1.7/16" (16-36)	38.1	280	105	9.5	86	105	9
SS 50	7/8"-1.1/4" (22-32)	1.7/16"-2" (36-51)	38.1	299	105	12.7	86	109	9.5
SS 60	1.1/4"-1.1/2" (32-38)	1.13/16"-2.3/8" (46-60)	57.1	407	153	14.3	102	124	27.7
SS 70	1.3/8"-1.3/4" (35-45)	2.1/4"-2.3/4" (57-70)	57.1	407	153	17.5	115	143	28.2
SS 90	1.3/4"-2.1/4" (45-57)	2.3/4"-3.1/2" (70-89)	77.8	451	185	19.0	146	162	43.2
SS 100	2"-2.1/2" (50-64)	3.1/8"-3.7/8" (79-98)	79.4	458	185	22.2	159	154	45.4
SS 110	2.1/2"-2.3/4" (64-70)	3.3/4"-4.1/4" (95-108)	95.3	578	251	28.6	191	184	93.2
SS 130	3"-3.1/4" (76-83)	4.1/2"-5" (114-127)	104.8	585	251	28.6	229	184	95.4
SS 135	3 1/4"-3.1/2" (83-89)	4.7/8"-5.3/8" (124-136)	104.8	597	251	28.6	239	192	97.7

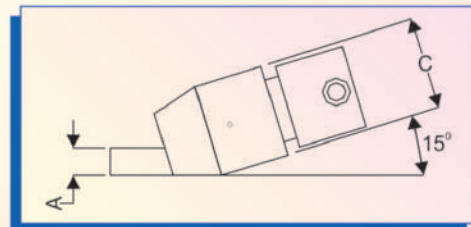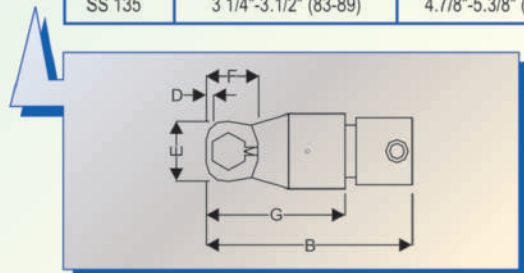

Angled Head Models

MODEL	STUD DIA IN (MM)	NUT A/F IN (MM)	A MM	B MM	C MM	D MM	E MM	F MM	G MM	WEIGHT KG.
SS 24 AH	5/16"-5/8" (8-16)	1/2"-1" (13-24)	17.5	190	70	6.0	66	92	131	3.2
SS 36 AH	7/16"-7/8" (11-22)	5/8"-1.7/16" (16-36)	38.1	277	102	7.0	70	87	189	9.0
SS 50 AH	7/8"-1.1/4" (22-32)	1.7/16"-2" (36-51)	38.1	291	102	12.7	92	102	204	9.5
SS 60 AH	1.1/4"-1.1/2" (32-38)	1.13/16"-2.3/8" (46-60)	57.1	410	153	14.3	108	148	292	27.7
SS 70 AH	1.3/8"-1.3/4" (35-45)	2.1/4"-2.3/4" (57-70)	57.1	420	153	17.5	127	152	302	28.2
SS 90 AH	1.3/4"-2.1/4" (45-57)	2.3/4"-3.1/2" (70-89)	77.8	499	185	19.0	159	159	337	43.2
SS 100AH	2"-2.1/2" (50-64)	3.1/8"-3.7/8" (79-98)	79.4	512	185	22.2	172	193	350	45.4