



PRECISION[®]

Pipes & Fittings



ELECTRICAL PIPING SYSTEMS

Har Building ki Lifeline
PRECISION PIPELINE

23rd Dec. 2020
PRICELIST

Round Conduit uPVC, G.I. & M.S.

PIPES & FITTINGS



Precision Round Conduit uPVC Pipes and Fittings

are manufactured from a specially formulated unplasticised polyvinyl chloride (uPVC) to meet the most stringent Indian and international standards. Our products are made of extra super high impact materials which make them safe to use in harsh environments. The products are manufactured in accordance with IS 9537-Part 3, BS EN 61386-21 for uPVC conduits, IS 3419:1988 and BS 4607 for uPVC fittings.

Applications

Channelising concealed and surface wiring.
Telecommunication and cable ducting.

DIMENSIONS OF ROUND CONDUIT uPVC PIPES IS 9537-PART 3					
Normal Size (mm)	Outside Diameter (mm)	Tolerance On Outside Diameter (mm)	Inside Diameter (Min) (mm)		
			Light	Medium	Heavy
16	16	-0.3	13.7	13.0	12.2
20	20	-0.3	17.4	16.9	15.8
25	25	-0.4	22.1	21.4	20.6
32	32	-0.4	28.6	27.8	26.6
40	40	-0.4	35.8	35.4	34.4
50	50	-0.5	45.1	44.3	43.2
63	63	-0.6	57.0	-	-
#Special Sizes					
19	19	-0.3	16.5	16.0	15.1
38	38	-0.4	33.7	33.4	32.4



Laser engraved
pipes



Fire retardant,
corrosion free



Easy and quick
installation

Colours

Black, Grey, Ivory & White.



Red, Green, Blue & Yellow are available on request.



Features

- Various diameters and grades.
- Light, medium and heavy mechanical stress, to suit various applications and site conditions.
- Easy and fast installation.
- Wide range of component maximises application.
- Durable and impact resistant.
- Fire retardant • Corrosion free.
- Thermal resistant from -5° C to +60° C.
- Precision circular boxes and adaptable boxes are provided with M4 brass insert with a load suspension capacity of 3 Kgs at 60° C.

Precision G.I. & M.S. Conduit Pipes are manufactured from a rigorously tested raw material, in accordance to Indian standards IS 9537 Part -2.

G.I. Conduit Pipes are coated by hot dipped galvanizing plant in which iron or steel is coated with a layer of zinc to protect them from corrosion or rusting. This coating renders a safety finish to the conduit which is durable in industrial installations, coastal line atmosphere & thermal power stations.

M.S. Conduit Pipes inner and outer surfaces are treated and coated with paint that help them protect from rusting.

G.I. - Silver



M.S. - Black



Application

Channelizing Electrical surface wiring and cable ducting.

Features

- Anti -rust coating and good finish.
- Easy to cut.
- High resistance to corrosion.

DIMENSIONS OF G.I. & M.S. CONDUIT PIPES IS 9537-PART 2				
Normal Size (mm)	Outside Diameter (mm)	Tolerance OD (mm)	Wall Thickness (mm)	Wall Thickness Tolerance (mm)
20	20	+0, - 0.3	1.60	±0.2
25	25	+0, - 0.4	1.60	±0.2
32	32	+0, - 0.4	1.60	±0.2
40	40	+0, - 0.4	2.00	+0.2, - 0.4
50	50	+0, - 0.5	2.00	+0.2, - 0.4

SR NO	PRODUCT CODE	SIZE	STANDARD PACK		North India Pkg.	RATE (Mtr)
		OD (mm)	Pc x Mtr	Mtr / Bdl	Mtr / Bdl	
LMS (LIGHT MECHANICAL STRESS) FRLS≈						
1	PRCS 16L	16	100 x 3m	300	-	24.00
2	PRCS 19L	19	100 x 3m	300	-	27.00
3	PRCS 19LNI	19	40 x 3m	-	120	27.00
4	PRCS 20L	20	100 x 3m	300	-	30.00
5	PRCS 20LNI	20	40 x 3m	-	120	30.00
6	PRCS 25L	25	100 x 3m	300	-	43.00
7	PRCS 25LNI	25	25 x 3m	-	75	43.00
8	PRCS 32L	32	50 x 3m	150	-	63.50
9	PRCS 32LNI	32	10 x 3m	-	30	63.50
10	PRCS 38L	38	30 x 3m	90	-	76.00
11	PRCS 40L	40	25 x 3m	75	-	101.50
12	PRCS 40LNI	40	5 x 3m	-	15	101.50
13	PRCS 50L	50	20 x 3m	60	-	146.50
14	PRCS 50LNI	50	5 x 3m	-	15	146.50
15	PRCS 63L	63	18 x 3m	54	-	216.50
MMS (MEDIUM MECHANICAL STRESS) FRLS≈						
16	PRCS 16M	16	100 x 3m	300	-	29.00
17	PRCS 19M	19	100 x 3m	300	-	32.50
18	PRCS 19MNI	19	40 x 3m	-	120	32.50
19	PRCS 20M	20	100 x 3m	300	-	35.50
20	PRCS 20MNI	20	40 x 3m	-	120	35.50
21	PRCS 25M	25	100 x 3m	300	-	49.00
22	PRCS 25MNI	25	25 x 3m	-	75	49.00
23	PRCS 32M	32	50 x 3m	150	-	78.50
24	PRCS 32MNI	32	10 x 3m	-	30	78.50
25	PRCS 38M	38	30 x 3m	90	-	109.00
26	PRCS 40M	40	25 x 3m	75	-	113.00
27	PRCS 40MNI	40	5 x 3m	-	15	113.00
28	PRCS 50M	50	20 x 3m	60	-	172.00
29	PRCS 50MNI	50	5 x 3m	-	15	172.00
HMS (HEAVY MECHANICAL STRESS) FRLS≈						
30	PRCS 16H	16	100 x 3m	300	-	36.00
31	PRCS 19H	19	100 x 3m	300	-	42.50
32	PRCS 19HNI	19	40 x 3m	-	120	42.50
33	PRCS 20H	20	100 x 3m	300	-	48.50
34	PRCS 20HNI	20	40 x 3m	-	120	48.50
35	PRCS 25H	25	50 x 3m	150	-	59.50
36	PRCS 25HNI	25	25 x 3m	-	75	59.50
37	PRCS 32H	32	50 x 3m	150	-	103.00
38	PRCS 32HNI	32	10 x 3m	-	30	103.00
39	PRCS 38H	38	30 x 3m	90	-	126.50
40	PRCS 40H	40	25 x 3m	75	-	135.50
41	PRCS 40HNI	40	5 x 3m	-	15	135.50
42	PRCS 50H	50	20 x 3m	60	-	206.00
43	PRCS 50HNI	50	5 x 3m	-	15	206.00

Special Size

≈ FRLS : Fire Retardant - Low Smoke

* LHSFT : Low Halogen - Smoke Suppressing - Fire Retardant - Temperature Stable Lead Free

∅ Suitable for 19mm LMS and 19mm MMS conduits also.

SR NO	PRODUCT CODE	SIZE	STANDARD PACK		North India Pkg.	RATE (Mtr)
		OD (mm)	Pc x Mtr	Mtr / Bdl	Mtr / Bdl	
MMS (*L.H.S.F.T. CONDUIT)						
44	PSFT 20MS	20	100 x 3m	300	-	42.50
45	PSFT 20MSNI	20	40 x 3m	-	120	42.50
46	PSFT 25MS	25	100 x 3m	300	-	58.00
47	PSFT 25MSNI	25	25 x 3m	-	75	58.00
48	PSFT 32MS	32	50 x 3m	150	-	103.00
49	PSFT 32MSNI	32	10 x 3m	-	30	103.00
50	PSFT 40MS	40	25 x 3m	75	-	152.50
51	PSFT 40MSNI	40	5 x 3m	-	15	152.50
52	PSFT 50MS	50	20 x 3m	60	-	210.00
53	PSFT 50MSNI	50	5 x 3m	-	15	210.00
HMS (*L.H.S.F.T. CONDUIT)						
54	PSFT 20HS	20	100 x 3m	300	-	57.00
55	PSFT 20HSNI	20	40 x 3m	-	120	57.00
56	PSFT 25HS	25	50 x 3m	150	-	71.00
57	PSFT 25HSNI	25	25 x 3m	-	75	71.00
58	PSFT 32HS	32	50 x 3m	150	-	128.50
59	PSFT 32HSNI	32	10 x 3m	-	30	128.50
60	PSFT 40HS	40	25 x 3m	75	-	177.50
61	PSFT 40HSNI	40	5 x 3m	-	15	177.50
62	PSFT 50HS	50	20 x 3m	60	-	256.50
63	PSFT 50HSNI	50	5 x 3m	-	15	256.50

G.I. & M.S. CONDUIT PIPES

HSN : 73069090

SR NO	PRODUCT CODE	SIZE OD (mm)	STANDARD PACK		RATE (Mtr)
			Pc x Mtr	Mtr/Bdl	
G.I. CONDUIT PIPES - COLOUR : SILVER					
64	PGIC 20	20	26 x 3m	78	163.00
65	PGIC 25	25	21 x 3m	63	194.50
66	PGIC 32	32	16 x 3m	48	299.50
67	PGIC 40	40	10 x 3m	30	478.00
68	PGIC 50	50	5 x 3m	15	551.50
M.S. CONDUIT PIPES - COLOUR : BLACK					
69	PMSC 20	20	26 x 3m	78	100.00
70	PMSC 25	25	21 x 3m	63	121.00
71	PMSC 32	32	16 x 3m	48	177.50
72	PMSC 40	40	10 x 3m	30	299.50
73	PMSC 50	50	5 x 3m	15	404.50

ROUND CONDUIT uPVC PIPE FITTINGS

HSN : 73201019

BENDING SPRING

SR NO	PRODUCT CODE	SIZE	COLOUR	STANDARD PACK		RATE (Pc)
		OD (mm)		Pc/Bag	Pc/Cart	
LIGHT GAUGE						
74	PBS20L	20	Green	10	50	275.00
75	PBS25L	25	Green	5	25	326.00
MEDIUM GAUGE						
76	PBS20M	20	Silver	10	50	275.00
77	PBS25M	25	Silver	5	25	326.00
HEAVY GAUGE						
78	PBS20H	20	Gold	10	50	275.00
79	PBS25H	25	Gold	5	25	326.00

ROUND CONDUIT uPVC PIPE FITTINGS

HSN : 39174000

COLOUR - BLACK / GREY / IVORY / WHITE

CIRCULAR BOX WITHOUT LID

SR NO	PRODUCT CODE	SIZE	STANDARD PACK		RATE (Pc)
		OD (mm)	Pc/Box	Pc/Carton	
CIRCULAR BOX - TERMINAL (1 WAY)					
80	PRCB 191	19	20	600	22.00
81	PRCB 201	20	20	600	22.50
82	PRCB 251	25	15	450	29.50
83	PRCB 321	32	10	160	53.00
84	PRCB 401	40	10	160	64.00
85	PRCB 501	50	5	80	116.00
CIRCULAR BOX - ANGLE (2 WAY)					
86	PRCB 192A	19	20	400	23.50
87	PRCB 202A	20	20	400	24.00
88	PRCB 252A	25	15	300	30.50
89	PRCB 322A	32	10	160	56.50
90	PRCB 402A	40	10	160	69.50
91	PRCB 502A	50	5	80	127.50
CIRCULAR BOX - THROUGH (2 WAY)					
92	PRCB 192S	19	20	400	23.50
93	PRCB 202S	20	20	400	24.00
94	PRCB 252S	25	15	300	30.50
95	PRCB 322S	32	10	160	56.50
96	PRCB 402S	40	10	160	69.50
97	PRCB 502S	50	5	80	127.50
CIRCULAR BOX - TEE (3 WAY)					
98	PRCB 193	19	20	400	26.00
99	PRCB 203	20	20	400	26.50
100	PRCB 253	25	15	300	34.00
101	PRCB 323	32	10	160	58.00
102	PRCB 403	40	10	160	73.00
103	PRCB 503	50	5	80	139.00
CIRCULAR BOX - INTERSECTION (4 WAY)					
104	PRCB 194	19	20	400	28.00
105	PRCB 204	20	20	400	28.50
106	PRCB 254	25	15	240	39.50
107	PRCB 324	32	10	160	61.50
108	PRCB 404	40	10	160	83.50
109	PRCB 504	50	5	80	150.50
DEEP CIRCULAR BOX - TERMINAL (1 WAY)					
110	PRCB 191D	19	10	280	37.50
111	PRCB 201D	20	10	280	38.00
112	PRCB 251D	25	10	280	46.00
113	PRCB 321D	32	10	280	54.00
DEEP CIRCULAR BOX - ANGLE (2 WAY)					
114	PRCB 192AD	19	10	280	40.00
115	PRCB 202AD	20	10	280	40.50
116	PRCB 252AD	25	10	280	48.00
117	PRCB 322AD	32	10	280	58.00
DEEP CIRCULAR BOX - THROUGH (2 WAY)					
118	PRCB 192SD	19	10	200	40.00
119	PRCB 202SD	20	10	200	40.50
120	PRCB 252SD	25	10	200	48.00
121	PRCB 322SD	32	10	200	58.00

SR NO	PRODUCT CODE	SIZE	STANDARD PACK		RATE (Pc)
		OD (mm)	Pc/Box	Pc/Carton	
DEEP CIRCULAR BOX - TEE (3 WAY)					
122	PRCB 193D	19	10	220	42.50
123	PRCB 203D	20	10	220	44.00
124	PRCB 253D	25	10	220	56.50
125	PRCB 323D	32	10	160	62.50
DEEP CIRCULAR BOX - INTERSECTION (4 WAY)					
126	PRCB 194D	19	10	220	45.00
127	PRCB 204D	20	10	220	46.00
128	PRCB 254D	25	10	220	59.50
129	PRCB 324D	32	10	160	63.50
CIRCULAR BOX - BRANCH - 2 WAY (U)					
130	PRCB 19U	19	20	400	40.00
131	PRCB 20U	20	20	400	40.50
132	PRCB 25U	25	20	400	53.00
CIRCULAR BOX - BRANCH - 3 WAY (Y)					
133	PRCB 19Y	19	20	400	42.50
134	PRCB 20Y	20	20	400	44.00
135	PRCB 25Y	25	15	300	58.00
CIRCULAR BOX - BRANCH - 4 WAY (H)					
136	PRCB 19H	19	15	300	45.00
137	PRCB 20H	20	15	300	46.00
138	PRCB 25H	25	15	300	62.50
CIRCULAR BOX - BACK OUTLET TERMINAL (1 WAY)					
139	PRCB 201 BO	20	20	400	39.50
140	PRCB 251 BO	25	15	300	55.00
CIRCULAR BOX - BACK OUTLET THROUGH (2 WAY)					
141	PRCB 202S BO	20	20	400	40.50
142	PRCB 252S BO	25	15	300	58.00
CIRCULAR BOX - BACK OUTLET ANGLE (2 WAY)					
143	PRCB 202A BO	20	20	400	40.50
144	PRCB 252A BO	25	15	300	58.00
CIRCULAR BOX - BACK OUTLET TEE (3 WAY)					
145	PRCB 203 BO	20	20	400	44.00
146	PRCB 253 BO	25	15	300	62.50
CIRCULAR LID (WITH SCREW)					
147	PRCL 65	65	100	2000	7.00
148	PRCL 80	80	100	2000	15.50
149	PRCL 85	85	100	2000	16.00
150	PRCL 90	90	100	1800	18.50
151	PRCL 93	93	25	750	18.50
152	PRCL 110	110	50	900	29.00
CIRCULAR LID (WITHOUT SCREW)					
153	PRCL 65WS	65	100	2000	5.50
154	PRCL 80WS	80	100	2000	15.00
155	PRCL 85WS	85	100	2000	15.50
156	PRCL 90WS	90	100	1800	17.50
157	PRCL 93WS	93	25	750	17.50
158	PRCL 110WS	110	50	900	28.50

» 65 - For 19/20/25mm JB, DJB & 32 DJB

» 80 - For 32/40mm JB

~ 93 - For 50 mm JB

ROUND CONDUIT uPVC PIPE FITTINGS

HSN : 39174000

COLOUR - BLACK / GREY / IVORY / WHITE



CIRCULAR BOX WITH LID & SCREW

SR NO	PRODUCT CODE	SIZE	STANDARD PACK		RATE (Pc)	
		OD (mm)	Pc/Box	Pc/Carton		
CIRCULAR BOX - TERMINAL (1 WAY)						
159	PRCB 191L	19	20	600	29.00	
160	PRCB 201L	20	20	600	29.50	
161	PRCB 251L	25	15	450	38.00	
162	PRCB 321L	32	10	160	70.50	
163	PRCB 401L	40	10	160	81.50	
164	PRCB 501L	50	5	80	136.00	
CIRCULAR BOX - ANGLE (2 WAY)						
165	PRCB 192AL	19	20	400	31.50	
166	PRCB 202AL	20	20	400	33.00	
167	PRCB 252AL	25	15	300	38.50	
168	PRCB 322AL	32	10	160	74.50	
169	PRCB 402AL	40	10	160	86.50	
170	PRCB 502AL	50	5	80	148.00	
CIRCULAR BOX - THROUGH (2 WAY)						
171	PRCB 192SL	19	20	400	31.50	
172	PRCB 202SL	20	20	400	33.00	
173	PRCB 252SL	25	15	300	38.50	
174	PRCB 322SL	32	10	160	74.50	
175	PRCB 402SL	40	10	160	86.50	
176	PRCB 502SL	50	5	80	148.00	
CIRCULAR BOX - TEE (3 WAY)						
177	PRCB 193L	19	20	400	34.00	
178	PRCB 203L	20	20	400	34.50	
179	PRCB 253L	25	15	300	41.50	
180	PRCB 323L	32	5	110	76.50	
181	PRCB 403L	40	5	110	90.00	
182	PRCB 503L	50	5	80	159.00	
CIRCULAR BOX - INTERSECTION (4 WAY)						
183	PRCB 194L	19	20	320	36.50	
184	PRCB 204L	20	20	320	37.00	
185	PRCB 254L	25	15	240	48.00	
186	PRCB 324L	32	5	110	78.50	
187	PRCB 404L	40	5	110	100.50	
188	PRCB 504L	50	5	80	171.00	
DEEP CIRCULAR BOX - TERMINAL (1 WAY)						
189	PRCB 191DL	19	10	280	45.00	
190	PRCB 201DL	20	10	280	46.00	
191	PRCB 251DL	25	10	280	54.00	
192	PRCB 321DL	32	10	280	61.50	
DEEP CIRCULAR BOX - ANGLE (2 WAY)						
193	PRCB 192ADL	19	10	280	48.50	
194	PRCB 202ADL	20	10	280	49.00	
195	PRCB 252ADL	25	10	280	55.00	
196	PRCB 322ADL	32	10	280	65.50	

SR NO	PRODUCT CODE	SIZE	STANDARD PACK		RATE (Pc)		
		OD (mm)	Pc/Box	Pc/Carton			
DEEP CIRCULAR BOX - THROUGH (2 WAY)							
197	PRCB 192SDL	19	10	200	48.50		
198	PRCB 202SDL	20	10	200	49.00		
199	PRCB 252SDL	25	10	200	55.00		
200	PRCB 322SDL	32	10	200	65.50		
DEEP CIRCULAR BOX - TEE (3 WAY)							
201	PRCB 193DL	19	10	220	50.50		
202	PRCB 203DL	20	10	220	51.50		
203	PRCB 253DL	25	10	220	64.50		
204	PRCB 323DL	32	10	160	70.50		
DEEP CIRCULAR BOX - INTERSECTION (4 WAY)							
205	PRCB 194DL	19	10	220	53.00		
206	PRCB 204DL	20	10	220	54.00		
207	PRCB 254DL	25	10	220	66.00		
208	PRCB 324DL	32	10	160	71.00		
CIRCULAR BOX - BRANCH - 2 WAY (U)							
209	PRCB 19UL	19	20	400	48.50		
210	PRCB 20UL	20	20	400	49.00		
211	PRCB 25UL	25	20	400	61.50		
CIRCULAR BOX - BRANCH - 3 WAY (Y)							
212	PRCB 19YL	19	15	300	50.50		
213	PRCB 20YL	20	15	300	51.50		
214	PRCB 25YL	25	15	300	65.50		
CIRCULAR BOX - BRANCH - 4 WAY (H)							
215	PRCB 19HL	19	15	300	53.00		
216	PRCB 20HL	20	15	300	54.00		
217	PRCB 25HL	25	15	300	70.50		
CIRCULAR BOX - BACK OUTLET TERMINAL (1 WAY)							
218	PRCB 201 BOL	20	20	400	48.00		
219	PRCB 251 BOL	25	15	300	63.50		
CIRCULAR BOX - BACK OUTLET THROUGH (2 WAY)							
220	PRCB 202S BOL	20	15	300	49.00		
221	PRCB 252S BOL	25	15	240	65.50		
CIRCULAR BOX - BACK OUTLET ANGLE (2 WAY)							
222	PRCB 202A BOL	20	15	300	49.00		
223	PRCB 252A BOL	25	15	240	65.50		
CIRCULAR BOX - BACK OUTLET TEE (3 WAY)							
224	PRCB 203 BOL	20	15	300	51.50		
225	PRCB 253 BOL	25	15	240	70.50		
CIRCULAR EXTENSION RING							
226	PRER 20	20	50	800	15.50		
227	PRER 25	25	40	640	20.50		
LOOP IN BOX							
228	PRLB 19	19 [4 punch]	20	400	23.50		
229	PRLB 20	20 [4 punch]	20	400	24.00		
230	PRLB 25	25 [2 punch]	20	400	24.00		
LOOP IN BOX EXTENSION							
231	PRLB 20E	20	24	384	34.00		

ROUND CONDUIT uPVC PIPE FITTINGS

HSN : 39174000

COLOUR - BLACK / GREY / IVORY / WHITE



SR NO	PRODUCT CODE	SIZE	STANDARD PACK		RATE
		OD (mm)	Pc/Box	Pc/Carton	(Pc)
COUPLER					
232	PCR 19	19	100	2000	5.50
233	PCR 20	20	100	2000	7.00
234	PCR 20L	20 Long	150	2400	7.50
235	PCR 25	25	100	2000	9.50
236	PCR 32	32	60	960	16.50
237	PCR 38	38	30	480	25.50
238	PCR 40	40	30	480	28.50
239	PCR 50	50	20	320	47.50
EXPANSION COUPLER					
240	PCR 20E	20	20	600	9.50
241	PCR 25E	25	12	360	16.00
242	PCR 32E	32	8	240	30.50
243	PCR 38E	38	10	200	38.00
244	PCR 50E	50	10	160	53.00
REDUCER COUPLER (PIPE TO FITTING)					
245	PRR 1	25>20	250	4000	9.50
REDUCER COUPLER (PIPE TO PIPE)					
246	PRR 2520	25 > 20	75	1500	10.00
247	PRR 3220	32 > 20	60	1200	14.00
248	PRR 3225	32 > 25	40	800	16.50
249	PRR 4020	40 > 20	48	960	20.50
250	PRR 4032	40 > 32	32	640	23.00
251	PRR 5032	50 > 32	30	480	28.50
252	PRR 5040	50 > 40	30	480	29.50
SLIP TYPE BEND					
253	PRBN 19	19	65	1040	11.00
254	PRBN 20	20	65	1040	11.50
255	PRBN 25	25	35	560	19.50
256	PRBN 32	32	20	320	51.50
257	PRBN 38	38	10	160	63.00
258	PRBN 40	40	10	160	103.00
259	PRBN 50	50	5	80	145.00
260	PRBN 63	63	-	50	198.00
SLIP TYPE LONG BEND					
261	PRBL 19	19	45	720	16.00
262	PRBL 20	20	45	720	17.00
263	PRBL 25	25	20	320	30.00
264	PRBL 32	32	10	160	70.50
265	PRBL 38	38	-	100	87.50
266	PRBL 40	40	-	80	140.00
267	PRBL 50	50	-	55	200.00
SPACE BAR SADDLE					
268	PRBS 19	19	100	2000	10.00
269	PRBS 20	20	100	2000	11.00
270	PRBS 25	25	100	2000	13.00
271	PRBS 32	32	100	1600	20.50
272	PRBS 38	38	80	1280	23.50
273	PRBS 40	40	80	1280	24.00
274	PRBS 50	50	60	960	28.50
275	PRBS 63	63	-	50	37.00

SR NO	PRODUCT CODE	SIZE	STANDARD PACK		RATE (Pc)
		OD (mm)	Pc/Box	Pc/Carton	
SADDLE STRAP					
276	PRSS 19	19	100	2000	5.00
277	PRSS 20	20	100	2000	5.50
278	PRSS 25	25	100	2000	7.50
279	PRSS 32	32	100	1600	10.00
280	PRSS 38	38	80	1280	12.50
281	PRSS 40	40	80	1280	13.00
282	PRSS 50	50	60	960	16.00
ROUND U CLIP					
283	PRUC 20	20	200	4000	9.50
284	PRUC 25	25	100	3000	14.50
END CAP					
285	PREC 20	20	150	3000	4.50
286	PREC 25	25	100	2000	5.50
287	PREC 32	32	70	1400	7.50
288	PREC 40	40	32	640	14.00
289	PREC 50	50	24	480	20.50
MALE BUSH ADAPTOR					
290	PMBA 19	19	100	2000	10.00
291	PMBA 20	20	100	2000	11.00
292	PMBA 25	25	100	2000	12.50
FEMALE BUSH ADAPTOR					
293	PFBA 19	19	100	2000	10.00
294	PFBA 20	20	100	2000	11.00
295	PFBA 25	25	100	2000	14.00
296	PFBA 32	32	75	1200	31.50
297	PFBA 38	38	50	800	42.00
298	PFBA 40	40	50	800	42.00
299	PFBA 50	50	25	400	70.50
ROUND ELBOW					
300	PRE 20	20	125	2500	10.00
301	PRE 25	25	75	1200	14.00
302	PRE 32	32	20	400	18.50
303	PRE 40	40	15	300	25.50
304	PRE 50	50	10	200	45.00
ROUND TEE					
305	PRT 20	20	50	1500	21.00
306	PRT 25	25	50	800	24.00
307	PRT 32	32	15	300	26.50
308	PRT 40	40	10	200	36.00
309	PRT 50	50	10	160	56.50
INSPECTION ELBOW					
310	PIE 20	20	20	600	39.50
311	PIE 25	25	20	400	49.00
INSPECTION TEE					
312	PIT 20	20	20	600	40.50
313	PIT 25	25	20	400	58.00
INSPECTION BEND					
314	PIB 20	20	20	600	40.50
315	PIB 25	25	20	400	58.00

ROUND CONDUIT uPVC PIPE

FITTINGS HSN : 39174000

COLOUR - BLACK / GREY / IVORY / WHITE

SR NO	PRODUCT CODE	SIZE	STANDARD PACK		RATE (Pc)
		W x H (inch)	Pc/Box	Pc/Carton	
ADAPTABLE BOX WITH LID					
316	PAB 75L	3" x 3" x 2"	10	200	86.50
		75x75x50			
317	PAB 110L	4" x 4" x 3"	-	100	171.00
		110x110x75			
318	PAB 160L	6" x 4" x 3"	-	75	338.50
		160x110x75			
319	PAB 160SL	6" x 6" x 3"	-	50	373.00
		160x160x75			
320	PAB 225SL	9" x 9" x 3"	-	20	802.50
		225x225x75			
321	PAB 300SL	12" x 12" x 4"	-	5	1686.50
		300x300x110			



SURFACE SWITCH BOX (WHITE)					
322	PSB 1	3" x 3"	10	300	53.00
323	PSB 2	6" x 3"	10	200	92.00



SWITCH BOX LID (WHITE)					
324	PSBL1 LID	3" x 3"	40	1200	24.00
325	PSBL2 LID	6" x 3"	25	750	31.50



FLUSH MOUNTED - SWITCH BOX					
326	PFSB 1	3" x 3" x 2.5"	10	200	61.50
327	PFSB 2	6" x 3" x 2.5"	10	160	81.50



SR NO	PRODUCT CODE	SIZE OD (mm)	STANDARD PACK		RATE (Pc)
			Pc/Box	Pc/Carton	

FAN BOX (BLACK)					
328	PRFB 20	20 Standard	10	220	64.00
329	PRFB 25	25 Standard	10	220	64.00
330	PRFB 20SL	20 Large	10	140	86.50
331	PRFB 25SL	25 Large	10	140	86.50
332	PRFBRD 2025	20/25 With Rod	1	28	257.50
333	PRFBRD 25	25 With Rod	1	28	257.50



SR NO	PRODUCT CODE	SIZE OD (mm)	STANDARD PACK		RATE (Pc)
			Pc/Box	Pc/Bag	

METAL FAN BOX - WITH ROD (BROWN)					
HSN : 73072900					
334	PMFB 2025	20/25	50		143.00



SR NO	PRODUCT CODE	SIZE (ml)	STANDARD PACK		RATE (Pc)
			Pc/Box	Pc/Carton	

uPVC SOLVENT CEMENT					
----------------------------	--	--	--	--	--

HSN : 35061000

335	PSC 100ML	100ml	Transparent	24	144	66.00
336	PSC 250ML	250ml	Transparent	24	96	111.00
337	PSC 500ML	500ml	Transparent	12	48	190.50
338	PSC 1L	1L	Transparent	6	24	331.00
339	PSC 5L	5L	Transparent	-	6	1514.50



SR NO	PRODUCT CODE	SIZE - W W(mm)xL[Mtr]	STANDARD PACK		RATE (pc)
			Pc/Box	Pc/Carton	
PVC ELECTRICAL INSULATION TAPE					

HSN : 85469090

COLOUR - 

340	PPIT 18	18x6.5	30	540	12.50
-----	---------	--------	----	-----	-------



OVAL CONDUIT uPVC PIPES

HSN : 39172310

COLOUR - WHITE

SR NO	PRODUCT CODE	SIZE	STANDARD PACK		RATE (Mtr)
		OD (mm)	Pc x Mtr	Mtr/Bdl	
OVAL CONDUIT uPVC PIPES					
341	POC 16	16	200 x 2m	400	17.00
342	POC 20	20	200 x 2m	400	22.50
343	POC 25	25	100 x 2m	200	30.00



OVAL CONDUIT uPVC PIPE

FITTINGS HSN : 39174000

COLOUR - WHITE

SR NO	PRODUCT CODE	SIZE OD (mm)	STANDARD PACK Pc/Box	RATE (Pc)
OVAL CONNECTOR				
344	POCT 16	16	100	2.00
345	POCT 20	20	50	4.50
346	POCT 25	25	50	5.50
OVAL ELBOW				
347	POE 16	16	100	4.50
348	POE 20	20	75	5.50
349	POE 25	25	50	9.00
OVAL TEE				
350	POT 16	16	100	5.50
351	POT 20	20	50	7.50
352	POT 25	25	40	9.00
OVAL INTERNAL BEND				
353	POIB 16	16	100	5.50
354	POIB 20	20	50	5.50
355	POIB 25	25	25	7.50
OVAL EXTERNAL BEND				
356	POEB 16	16	100	5.50
357	POEB 20	20	50	7.50
358	POEB 25	25	25	7.50
OVAL SADDLE STRAP				
359	POSS 16	16	100	4.50
360	POSS 20	20	100	4.50
361	POSS 25	25	100	7.50
OVAL SADDLE STRAP BASE				
362	POB	Standard	100	7.50
OVAL 'U' CLIP				
363	POU 16	16	200	4.50
364	POU 20	20	150	5.50
365	POU 25	25	150	7.00
OVAL TO ROUND ADAPTOR				
366	PORA 16	16	100	4.50
367	PORA 20	20	50	7.50
368	PORA 25	25	25	9.00



Δ 32/38/40mm Knockout Available
 ◇ 50mm Knockout Available
 ✕ 20mm Knockout Available
 ≠ 20/25mm Knockout Available

Corrugated Flexible CONDUIT PIPES & FITTINGS

Precision Corrugated Flexible Conduit Pipes come in a wide and comprehensive range of material variants to suit variety of applications. These conduits are manufactured in slit and non-slit variants based on the final application for wiring purposes.

Polypropylene Flexible Conduits are the best solution for applications where resistance to constant flexing and vibration is essential. These conduits display excellent flexibility, moreover, they are light weight and easy to install which makes them very popular. Temperature resistant from -5°C to +90°C.

Fire Retardant Polypropylene Flexible Conduits are self extinguishing. These conduits are manufactured from UL94 V2 rated material, ideally suited for automobile applications, wire harnessing, electrical wiring, cable protection and an envelope to LPG gas conductors. Temperature resistant from -5°C to +90°C.

Polyamide Flexible Conduits are manufactured from flame retardant and self extinguishing (PA6) material, making them suitable for high temperature zones where human life or components are at risk, high resistance to corrosion by most mineral oils, acids and alkalis. They are widely used in automobile applications and have temperature resistance upto +120°C.

Steel Wire Reinforced Flexible uPVC Conduits are manufactured with soft polyvinyl chloride (uPVC) wall fused to high tensile steel wire in a coiled state. These conduits are unaffected by inorganic acid, alkali, saline water. Most suitable for electrical wiring in building, switch boards, panels, machinery, dust collectors, air dusting, exhaust of fumes, shrouds of railway coach wiring and hospital equipments. Temperature resistant from -5°C to +60°C.

Colours

Black, Grey, Ivory & White



Red, Green, Blue & Yellow are available on request



Fire retardant,
corrosion free



Precision Galvanised Steel Flexible Conduit

Precision Steel Flexible Conduit Pipes are made from Galvanized steel, helical wound strips having a Square Lock type Construction and are manufactured in accordance to Indian/British Standards in Galvanized zinc coating with spiral corrugated pattern finished surface. Mostly used as low pressure hose in Industrial domestic air Conditioning, Ventilation systems and as mechanical protection for insulated electrical cables & wires which may be exposed to atmospheric conditions.

Precision Galvanised Steel Flexible Conduit with PVC Coating

Precision PVC Coated Steel Flexible Conduit Pipes are made from Galvanized steel, helical wound strips having a Square Lock type Construction and are manufactured in accordance to Indian/British Standards in poly vinyl coating Black/Grey colour with spiral corrugated pattern finished surface.

Most suitable for Mechanical protection of cable and wire in tunnels, hospitals, high-rise office blocks and public buildings.

CORRUGATED FLEXIBLE CONDUIT

PIPES HSN : 39173100

COLOUR - BLACK / GREY / IVORY / WHITE

DIMENSIONS OF CORRUGATED FLEXIBLE CONDUITS			
Nominal Diameter (mm)	Maximum Outside Diameter (mm)	Tolerance On Outside Diameter (mm)	Minimum Inside Diameter (mm)
10	10	-0.1	7.0
16	16	-0.3	10.7
20	20	-0.3	14.1
25	25	-0.4	18.3
32	32	-0.4	24.3
40	40	-0.4	31.2
50	50	-0.5	39.6
63	63	-0.6	52.6

DIMENSIONS OF GALVANIZED STEEL FLEXIBLE CONDUIT PIPES				
Normal Size (mm)	Normal Size (inch)	OD (mm)	ID (mm)	Bending radius/mm
16	1/2"	15.5	12.5	40
20	3/4"	22.5	19.5	55
25	1"	28	25.0	60
32	1 1/4"	35.0	32.0	70
40	1 1/2"	42.0	38.0	80
50	2"	54.0	50.0	90

*Tolerance : Size below 50mm, +/- 1mm & above 50mm +/- 3mm

DIMENSIONS OF GALVANIZED STEEL FLEXIBLE CONDUIT PIPES WITH PVC COATING				
Normal Size (mm)	Normal Size (inch)	OD (mm)	ID (mm)	Bending radius/mm
16	1/2"	16.5	12.5	40
20	3/4"	23.5	19.5	55
25	1"	29	25.0	60
32	1 1/4"	36.5	32.0	70
40	1 1/2"	44.0	38.0	80
50	2"	57.0	51.0	90

*Tolerance : Size below 50mm, +/- 1mm & above 50mm +/- 3mm

SR NO	PRODUCT CODE	SIZE OD (mm)	STANDARD PACK		RATE (Mtr)
(PP) POLY PROPYLENE					
369	PCFC 10	10	100	1000	10.00
370	PCFC 16	16	50	500	10.00
371	PCFC 20	20	50	500	13.50
372	PCFC 25	25	25	250	19.50
373	PCFC 32	32	25	250	31.00
374	PCFC 40	40	20	100	42.00
375	PCFC 50	50	15	75	65.50
376	PCFC 63	63	10	50	102.50
FRPP (FIRE RETARDANT POLY PROPYLENE)					
377	PCFR 10	10	100	1000	19.00
378	PCFR 16	16	50	500	19.00
379	PCFR 20	20	50	500	21.50
380	PCFR 25	25	25	250	31.50
381	PCFR32	32	25	250	50.00
382	PCFR 40	40	20	100	74.50
383	PCFR 50	50	15	75	106.50
384	PCFR 63	63	10	50	175.50



CORRUGATED FLEXIBLE CONDUIT

PIPES (SLITTED) HSN : 39173100

COLOUR - BLACK / GREY / IVORY / WHITE

SR NO	PRODUCT CODE	SIZE OD (mm)	STANDARD PACK		RATE [Mtr]
(PP) POLY PROPYLENE					
385	PCFC 10 S	10	100	1000	12.50
386	PCFC 16 S	16	50	500	12.50
387	PCFC 20 S	20	50	500	15.00
388	PCFC 25 S	25	25	250	22.00
389	PCFC 32 S	32	25	250	34.50
390	PCFC 40 S	40	20	100	44.50
391	PCFC 50 S	50	15	75	67.50
392	PCFC 63 S	63	10	50	104.50
FRPP (FIRE RETARDANT POLY PROPYLENE)					
393	PCFR 10 S	10	100	1000	21.50
394	PCFR 16 S	16	50	500	21.50
395	PCFR 20 S	20	50	500	24.00
396	PCFR 25 S	25	25	250	34.00
397	PCFR32 S	32	25	250	52.00
398	PCFR 40 S	40	20	100	76.50
399	PCFR 50 S	50	15	75	109.00
400	PCFR 63 S	63	10	50	178.50



CORRUGATED FLEXIBLE CONDUIT PIPE FITTINGS

HSN : 39174000

COLOUR - BLACK / GREY

SR NO	PRODUCT CODE	SIZE OD (mm)	STANDARD PACK Pc/Box Pc/Carton		RATE (Pc)
CORRUGATED FLEXIBLE CONDUIT GLAND					
401	PFAG 16	16	125	2250	4.50
402	PFAG 20	20	75	1350	6.00
403	PFAG 25	25	50	900	8.50
404	PFAG 32	32	30	540	10.00
405	PFAG 40	40	20	360	15.50
406	PFAG 50	50	5	150	19.50



CORRUGATED FLEXIBLE CONDUIT PIPES

HSN : 39173100

COLOUR - BLACK

SR NO	PRODUCT CODE	SIZE OD (mm)	STANDARD PACK		RATE [Mtr]
			Mtr/Coil	Mtr/Bag	
NYLON (POLYAMIDE)					
407	PCPA 10	10	100	1000	83.00
408	PCPA 16	16	50	250	89.00
409	PCPA 20	20	50	250	105.00
410	PCPA 25	25	25	125	154.00
411	PCPA 32	32	25	125	235.00
412	PCPA 40	40	20	100	319.00
413	PCPA 50	50	15	75	443.00
414	PCPA 63	63	10	50	693.00



STEEL WIRE REINFORCED FLEXIBLE uPVC CONDUIT PIPES

HSN : 39172190

COLOUR - GREY

SR NO	PRODUCT CODE	SIZE ID (mm)	STANDARD PACK Mtr/Coil Mtr/Bag		RATE (Mtr)
STEEL WIRE REINFORCED FLEXIBLE uPVC CONDUIT PIPES					
415	PCWR 10	10	30	300	46.00
416	PCWR 16	16	30	300	49.50
417	PCWR 20	20	30	240	68.00
418	PCWR 25	25	30	210	78.00
419	PCWR 30	30	30	150	101.00
420	PCWR 40	40	30	120	124.00
421	PCWR 50	50	30	90	153.00
422	PCWR 60	60	15	75	196.50



STEEL WIRE REINFORCED FLEXIBLE uPVC CONDUIT PIPE FITTINGS

HSN : 39174000

COLOUR - GREY

SR NO	PRODUCT CODE	SIZE OD (mm)	STANDARD PACK Pc/Box Pc/Carton		RATE (Pc)
STEEL WIRE REINFORCED FLEXIBLE uPVC CONDUIT GLAND					
423	PFRG 10	10	75	1350	8.50
424	PFRG 16	16	60	1080	10.00
425	PFRG 20	20	45	810	13.50
426	PFRG 25	25	30	540	17.50
427	PFRG 30	30	20	360	21.50
428	PFRG 40	40	15	270	28.50
429	PFRG 50	50	5	150	41.00



GALVANISED STEEL FLEXIBLE CONDUIT PIPES

HSN : 83071000

COLOUR - SILVER

SR NO	PRODUCT CODE	NORMAL SIZE (mm)	NORMAL SIZE (inch)	STANDARD PACK Mtr/Coil Mtr/Bag		RATE (Mtr)
GALVANIZED STEEL FLEXIBLE CONDUIT						
430	PGIFC16	16	1/2"	15	210	29.00
431	PGIFC20	20	3/4"	15	150	35.00
432	PGIFC25	25	1"	15	105	48.50
433	PGIFC32	32	1 ¼"	15	75	71.00
434	PGIFC40	40	1 ½"	15	75	85.00
435	PGIFC50	50	2"	10	50	119.50



GALVANISED STEEL FLEXIBLE CONDUIT PIPES WITH PVC COATING

HSN : 83071000

COLOUR - BLACK / GREY

SR NO	PRODUCT CODE	NORMAL SIZE (mm)	NORMAL SIZE (inch)	STANDARD PACK Mtr/Coil Mtr/Bag		RATE [Mtr]
GALVANIZED STEEL FLEXIBLE CONDUIT WITH PVC COATING						
436	PGIFCP16	16	1/2"	50	250	41.00
437	PGIFCP20	20	3/4"	25	150	48.00
438	PGIFCP25	25	1"	15	105	69.00
439	PGIFCP32	32	1 ¼"	15	75	99.00
440	PGIFCP40	40	1 ½"	15	75	119.00
441	PGIFCP50	50	2"	15	60	139.00



uPVC Mini/Maxi TRUNKING PROFILE & FITTINGS



Precision uPVC Mini/Maxi Trunking Profile and Fittings are manufactured from high impact unplasticised polyvinyl chloride (uPVC) grade material capable of withstanding the most hazardous conditions on-site and exceeds the most stringent requirements of Indian and International standards. The product range brings a whole new world of sophistication and convenience to home, office and commercial establishments and is in accordance with Indian Standards IS 14927-Part 2 and BS EN 50085-2-1. Mini Trunking Profile are also available with self fixing tape for instant and easy installation. Clip on lid provides security while allowing easy maintenance.

Precision uPVC Maxi Trunking Profile Cable Management System is designed for convenience and safety with compartments for separate wiring applications. Maxi Trunking Profile fittings are available in moulded and fabricated form, thus adding a sleek touch to your interiors.

Application


To organize and protect cables on surface.

Features


- Fast installation and easy maintenance.
- Secure and elegant look.
- Wide range of sizes to suit all cabling requirements
- Durable and impact resistant
- Fire retardant
- Corrosion free
- Thermal resistant from -5°C to +60°C

Colours

Ivory, White



Fire retardant,
corrosion free



Wide range

uPVC MINI/MAXI TRUNKING PROFILE

HSN : 39162019

SR NO	PRODUCT CODE	SIZE W x H (mm)	STANDARD PACK Pc x Mtr Mtr/Bdl	RATE [Mtr]
uPVC MINI TRUNKING PROFILE (IVORY/WHITE)				
442	PT 2012	20 x 12	100 x 2m 200	32.50
443	PT 2512	25 x 12	100 x 2m 200	40.00
444	PT 3212	32 x 12	100 x 2m 200	51.00
445	PT 1616	16 x 16	100 x 2m 200	31.50
446	PT 2516	25 x 16	100 x 2m 200	42.50
447	PT 3816	38 x 16	50 x 2m 100	74.00
448	PT 3825	38 x 25	50 x 2m 100	111.50
449	PT 3838	38 x 38	25 x 2m 50	135.50
450	PT 5016	50 x 16	50 x 2m 100	113.00

uPVC MINI TRUNKING PROFILE (IVORY/ WHITE - SELF ADHESIVE)				
451	PTS 1616	16 x 16	100 x 2m 200	44.50
452	PTS 2516	25 x 16	100 x 2m 200	60.50
453	PTS 3816	38 x 16	50 x 2m 100	106.00
454	PTS 3825	38 x 25	50 x 2m 100	134.50

SR NO	PRODUCT CODE	SIZE W x H (mm)	STANDARD PACK Pc x Mtr Mtr/Bdl	RATE [Mtr]
uPVC MAXI TRUNKING PROFILE (WHITE)				
455	PT 5050	50 x 50	20 x 2m 40	188.00
# 456	PT 5050 WF	50 x 50	20 x 2m 40	188.00
457	PT 7550	75 x 50	12 x 2m 24	454.50
458	PT 7575	75 x 75	9 x 2m 18	588.00
459	PT 10050	100 x 50	10 x 2m 20	734.00
460	PT 100100	100 x 100	6 x 2m 12	1063.00
461	PT 15050	150 x 50	5 x 2m 10	1434.50

MT - MAXI TRUNKING PROFILE (WHITE)				
462	PMT150150	150 x 150	2 x 3m 4	1470.00

uPVC MAXI TRUNKING PROFILE DIVIDER (WHITE)				
∞ 463	PMTD	Standard	50 x 2m 100	103.00
RECTANGULAR CHANNEL PROFILE (WHITE)				
464	PCH 13	13 x 9	50 x 2m 100	22.50
465	PCH 25	25 x 9	50 x 2m 100	28.50
466	PCH 38	38 x 9	50 x 2m 100	36.00

∞ For 100 x 50 # without Fittings.

uPVC MINI/MAXI TRUNKING PROFILE

FITTINGS (MOULDED)

HSN : 39174000

COLOUR - IVORY / WHITE

SR NO	PRODUCT CODE	SIZE W x H (mm)	STANDARD PACK Pc/Box	RATE [Pc]
COUPLER				
467	PTC 2012	20 x 12	100	7.50
468	PTC 2512	25 x 12	100	9.00
469	PTC 3212	32 x 12	100	9.00
470	PTC 1616	16 x 16	100	9.00
471	PTC 2516	25 x 16	100	10.00
472	PTC 3816	38 x 16	50	15.00
473	PTC 3825	38 x 25	50	15.00
474	PTC 5050	50 x 50 (W)	10	66.00
475	PTC 10050	100 x 50 (W)	10	93.50

ELBOW				
476	PTB 2012	20 x 12	100	9.00
477	PTB 2512	25 x 12	100	9.00
478	PTB 3212	32 x 12	100	11.00
479	PTB 1616	16 x 16	100	12.50
480	PTB 2516	25 x 16	100	12.50
481	PTB 3816	38 x 16	100	15.00
482	PTB 3825	38 x 25	100	24.00
483	PTB 5050	50 x 50 (W)	10	94.50
484	PTB 10050	100 x 50 (W)	10	225.00

TEE				
485	PTT 2012	20 x 12	100	9.00
486	PTT 2512	25 x 12	50	12.50
487	PTT 3212	32 x 12	50	12.50
488	PTT 1616	16 x 16	100	10.00
489	PTT 2516	25 x 16	50	12.50
490	PTT 3816	38 x 16	50	20.50
491	PTT 3825	38 x 25	50	24.00
492	PTT 5050	50 x 50 (W)	10	119.50
493	PTT10050	100 x 50 (W)	10	259.50

SR NO	PRODUCT CODE	SIZE W x H (mm)	STANDARD PACK Pc/Box	RATE [Pc]
INTERNAL BEND				
494	PTI 2512	25 x 12	100	12.50
495	PTI 3212	32 x 12	100	12.50
496	PTI 1616	16 x 16	100	10.00
497	PTI 2516	25 x 16	100	12.50
498	PTI 3816	38 x 16	100	15.00
499	PTI 3825	38 x 25	50	24.00
500	PTI 5050	50 x 50 (W)	10	99.50
501	PTI 10050	100 x 50 (W)	10	152.00

EXTERNAL BEND				
502	PTE 2512	25 x 12	100	12.50
503	PTE 3212	32 x 12	100	12.50
504	PTE 1616	16 x 16	100	10.00
505	PTE 2516	25 x 16	100	12.50
506	PTE 3816	38 x 16	100	15.00
507	PTE 3825	38 x 25	50	24.00
508	PTE 5050	50 x 50 (W)	10	99.50
509	PTE 10050	100 x 50 (W)	10	152.00

4 WAY				
510	PTW 3212	32 x 12	50	14.00

END CAP				
511	PMTTC 50	50 x 50 (W)	50	115.00
512	PMTTC 100	100 x 50 (W)	50	127.50

uPVC MINI/MAXI TRUNKING PROFILE FITTINGS (MOULDED)

HSN : 39174000

COLOUR - IVORY / WHITE

SR NO	PRODUCT CODE	SIZE W x H (mm)	STANDARD PACK Pc/Box Pc/Carton	RATE (Pc)
JUNCTION LINKER				
513	PTJL 7575	Standard	25 500	9.50



SR NO	PRODUCT CODE	SIZE W x H (inch)	STANDARD PACK Pc/Box Pc/Carton	RATE (Pc)
SURFACE SWITCH BOX - TRUNKING KNOCKOUT (WHITE)				
514	PTSB1	3" x 3"	10 300	52.50
515	PTSB2	6" x 3"	10 200	88.50



\$ 16x16,25x16 Knockout Available

uPVC MINI/MAXI TRUNKING PROFILE FITTINGS (FABRICATED)

HSN : 39174000

COLOUR - WHITE

SR NO	PRODUCT CODE	SIZE W x H (mm)	STANDARD PACK Pc/Bag	RATE (Pc)
ELBOW				
516	PMTL 751	75 x 50	5	342.00
517	PMTL 752	75 x 75	5	407.00
518	PMTL 1002	100 x 100	5	795.00
519	PMTL 1501	150 x 50	5	914.00
520	PMTL 1502	150 x 150	-	-
TEE				
521	PMTT 751	75 x 50	5	342.00
522	PMTT 752	75 x 75	5	407.00
523	PMTT 1002	100 x 100	5	759.00
524	PMTT 1501	150 x 50	5	873.00
525	PMTT 1502	150 x 150	-	-
INTERNAL ANGLE				
526	PMTI 751	75 x 50	5	342.00
527	PMTI 752	75 x 75	5	407.00
528	PMTI 1002	100 x 100	5	759.00
529	PMTI 1501	150 x 50	5	873.00
530	PMTI 1502	150 x 150	-	-
EXTERNAL ANGLE				
531	PMTE 751	75 x 50	5	342.00
532	PMTE 752	75 x 75	5	407.00
533	PMTE 1002	100 x 100	5	759.00
534	PMTE 1501	150 x 50	5	873.00
535	PMTE 1502	150 x 150	-	-
FLAT ANGLE 135°				
536	PTFA 50	50 x 50	5	220.00
537	PTFA 751	75 x 50	5	342.00
538	PTFA 752	75 x 75	5	407.00
539	PTFA 1001	100 x 50	5	499.00
540	PTFA 1002	100 x 100	5	759.00
541	PTFA 1501	150 x 50	5	873.00
542	PTFA 1502	150 x 150	-	-



SR NO	PRODUCT CODE	SIZE W x H (mm)	STD. PACK Pc/Bag	RATE (Pc)
INTERNAL ANGLE 135°				
543	PTIA 50	50 x 50	5	220.00
544	PTIA 751	75 x 50	5	342.00
545	PTIA 752	75 x 75	5	407.00
546	PTIA 1001	100 x 50	5	499.00
547	PTIA 1002	100 x 100	5	759.00
548	PTIA 1501	150 x 50	5	873.00
549	PTIA 1502	150 x 150	-	-
EXTERNAL ANGLE 135°				
550	PTEA 50	50 x 50	5	220.00
551	PTEA 751	75 x 50	5	342.00
552	PTEA 752	75 x 75	5	407.00
553	PTEA 1001	100 x 50	5	499.00
554	PTEA 1002	100 x 100	5	759.00
555	PTEA 1501	150 x 50	5	873.00
556	PTEA 1502	150 x 150	-	-
INTERNAL TEE 90°				
557	PTIT 50	50 x 50	5	220.00
558	PTIT 751	75 x 50	5	342.00
559	PTIT 752	75 x 75	5	407.00
560	PTIT 1001	100 x 50	5	499.00
561	PTIT 1002	100 x 100	5	759.00
562	PTIT 1501	150 x 50	5	873.00
563	PTIT 1502	150 x 150	-	-
EXTERNAL TEE 90°				
564	PTET 50	50 x 50	5	220.00
565	PTET 751	75 x 50	5	342.00
566	PTET 752	75 x 75	5	407.00
567	PTET 1001	100 x 50	5	499.00
568	PTET 1002	100 x 100	5	759.00
569	PTET 1501	150 x 50	5	873.00
570	PTET 1502	150 x 150	-	-





Marshall-Tufflex is UK's leading manufacturer and supplier of cable management solutions for commercial, industrial, healthcare, education and domestic markets. These products are now available in India exclusively through **Precision Pipes**

MT - CABLE MANAGEMENT PROFILE HSN : 39162019

COLOUR - WHITE

SR NO	PRODUCT CODE	SIZE W x H (mm)	STANDARD PACK Pc x Mtr	Mtr/Bdl	RATE (Mtr)
STERLING PROFILE 1 - 3 COMPARTMENT					
571	PMTS 16750	167 x 50	1 x 2m	2	1600.00



SR NO	PRODUCT CODE	SIZE W x H (mm)	STANDARD PACK Pc x Mtr	Mtr/Bdl	RATE (Mtr)
STERLING CURVE PROFILE 1 - 3 COMPARTMENT					
572	PMTSC 16750	167 x 50	1 x 2m	2	1600.00



MT - CABLE MANAGEMENT PROFILE - FITTINGS HSN : 39174000

COLOUR - WHITE

SR NO	PRODUCT CODE	SIZE W x H (mm)	STD.PACK Pc/Bag	RATE (Pc)
COUPLER				
573	PMC150150	150 x 150	5	420.00
574	PMC 16750	167 x 50	2	97.00
575	PMCC 16750	167 x 50	2	97.00
ELBOW				
576	PMB 16750	167 x 50	1	485.00
577	PMBC 16750	167 x 50	1	485.00
TEE				
578	PMTT 16750	167 x 50	1	554.00
579	PMTC16750	167 x 50	1	554.00




SR NO	PRODUCT CODE	SIZE W x H (mm)	STD.PACK Pc/Bag	RATE (Pc)
INTERNAL BEND				
580	PMI 16750	167 x 50	2	415.00
581	PMIC16750	167 x 50	2	415.00
EXTERNAL BEND				
582	PMEB 16750	167 x 50	2	415.00
583	PMEBC 16750	167 x 50	2	415.00
END CAP				
584	PMEC150150	150 x 150	1	320.00
585	PMEC 16750	167 x 50	2	115.00
586	PMECC 16750	167 x 50	2	115.00



¥ : Sterling Profile 1 - 3 Compartment
£ : Sterling Curve Profile 1 - 3 Compartment

uPVC Panel Trunking

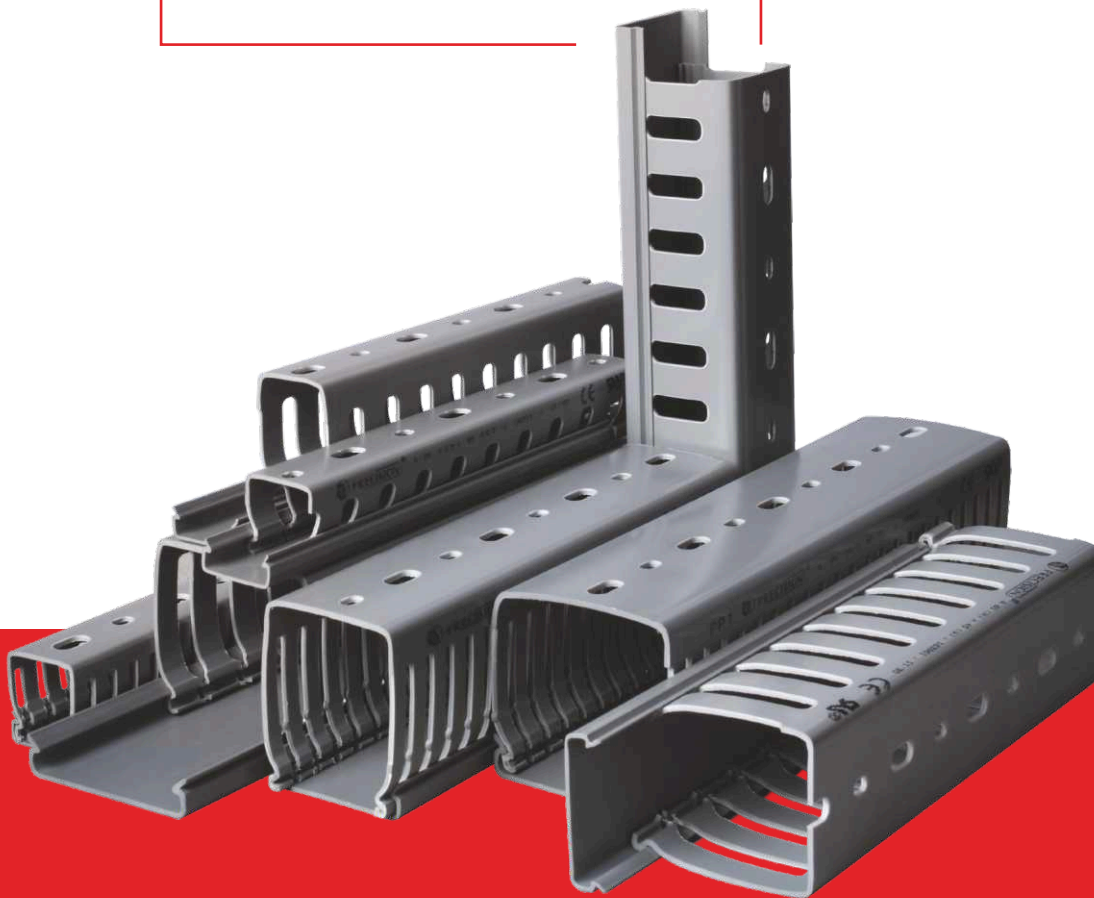

Precision uPVC Panel Trunking are manufactured from high impact unplasticised polyvinyl chloride (uPVC) to ensure panel & machinery safety in extreme conditions. These trunkings are ideal to channelise medium and big size panels & various applications where economy, space saving, safety and durability are paramount.

Applications

To conduct, organize, and protect cables inside electrical and telecommunication panels, industrial machinery wiring, Computer LAN wiring and data centers.

Features

- Non – brittle, flame retardant, wrap proof
- Vertical slides and detachable strips facilitates systematic wiring, permits faster connections, additions and fault tracing of wires
- Avoids bunching, taping and provides complete electrical insulation
- Unique cover locking design prevents popping of wires while removing cover
- Elongated slots at bottom allows flexible mounting
- High tensile strength 390 kg/cm²
- Thermal resistant from -5°C to +60°C

Colour

Grey



Thermal resistant

uPVC PANEL TRUNKING HSN : 85381010



COLOUR - GREY

SR NO	PRODUCT CODE	SIZE H x W (mm)	STANDARD PACK Pc x Mtr	Mtr/Carton	RATE (Mtr)
uPVC PANEL TRUNKING - STANDARD SLOT					
587	PPT 1515	15 x 15	200 x 1m	200	52.50
588	PPT 2525	25 x 25	130 x 1m	130	79.50
589	PPT 3025	30 x 25	125 x 1m	125	85.50
590	PPT 4525	45 x 25	90 x 1m	90	106.00
591	PPT 4545	45 x 45	50 x 1m	50	146.50
592	PPT 4560	45 x 60	50 x 1m	50	188.00
593	PPT 6025	60 x 25	70 x 1m	70	135.50
594	PPT 6040	60 x 40	60 x 1m	60	169.00
595	PPT 6045	60 x 45	50 x 1m	50	170.00
596	PPT 6060	60 x 60	40 x 1m	40	213.00
597	PPT 7525	75 x 25	60 x 1m	60	172.00
598	PPT 7575	75 x 75	30 x 1m	30	312.00
599	PPT 10075	100 x 75	24 x 1m	24	510.00
600	PPT 100100	100 x 100	16 x 1m	16	601.00



SR NO	PRODUCT CODE	SIZE H x W (mm)	STANDARD PACK Pc x Mtr	Mtr/Carton	RATE (Mtr)
uPVC PANEL TRUNKING - THIN SLOT					
601	PPT 3025TS	30 x 25	125 x 1m	125	90.00
602	PPT 4525TS	45 x 25	90 x 1m	90	111.50
603	PPT 4545TS	45 x 45	50 x 1m	50	153.50
604	PPT 4560TS	45 x 60	-	-	-
605	PPT 6025TS	60 x 25	70 x 1m	70	144.50
606	PPT 6040TS	60 x 40	60 x 1m	60	178.50
607	PPT 6045TS	60 x 45	50 x 1m	50	179.50
608	PPT 6060TS	60 x 60	40 x 1m	40	224.50



SR NO	PRODUCT CODE	SIZE (mm)	STANDARD PACK Pc x Mtr	Mtr/Carton	RATE (Mtr)
uPVC PANEL TRUNKING - TOP COVER					
609	PPT 25T	25	100 x 1m	100	49.50
610	PPT 40T	40	-	-	-
611	PPT 45T	45	50 x 1m	50	57.00
612	PPT 60T	60	50 x 1m	50	90.00
613	PPT 75T	75	25 x 1m	25	127.50
614	PPT 100T	100	25 x 1m	25	142.50




OPTIMAL GRIP LID

- Precision's Panel Trunking lid design provides high capacity to sustain leads of wire in the case of a cable positioned in the centre of the duct and avoids them from riding up.
- Quick snap on/off and non-slip assembly forms a firm rigid channel.




STANDARD SLOT



THIN SLOT

WALL PERFORATION RIB DESIGN

- All wall perforation ribs of Precision Panel Trunking have larger rounded slots for easy insertion of wires and cables.
- Rounded design with burr-free edges to prevent any injury to the hand of the user or to the cable insulation.




- Interlocking lid and channel is optimised to make the system easier to install and to provide discrete routing of cables.
- Uniform grip and thickness throughout the length system with independent non-slip lid, keeps cover in place during high vibration applications.



ELONGATED MOUNTING SLOTS

- Perforated base with elongated slot allows flexible mounting and better fastening of the cables.
- Robust sections.



° All dimensions in (mm)





PRODUCTS IN
PARTNERSHIP WITH



UK OWNED
UK MANUFACTURER 

MARSHALL TUFFLEX

INNOVATIVE IDEAS IN CABLE
MANAGEMENT

THE LARGEST SELECTION OF CABLE
MANAGEMENT SOLUTIONS FOR THE
MODERN ENVIRONMENT

- STERLING PROFILE 1
- 3 COMPARTMENT



- STERLING CURVE PROFILE 1 -
3 COMPARTMENT



www.marshall-tufflex.com



Pipes & Fittings

Plumbing PIPING SYSTEMS

CPVC Pipes & Fittings

ASTM (uPVC) Pipes & Fittings

Sewerage Waste and Rainwater (SWR) Pipes & Fittings

Agriculture uPVC Pipes & Fittings



TERMS & CONDITIONS

- All mentioned prices are exclusive of GST and other government taxes (if any).
- The above prices are ex-factory.
- Any revision in existing taxation or any new government taxes will be to buyers' account only.
- Prices are subjected to change without prior notice.
- Subject to Mumbai Jurisdiction.

ISO 9001:2015

Har Building ki Lifeline PRECISION PIPELINE



Pipes & Fittings

Precision Plastic Industries Pvt. Ltd.

19/D, Nand Jyot Industrial Estate,
Safed Pool, Andheri-Kurla Road,
Andheri (East), Mumbai 400072, India

Customer Care : +91 77150 00015 | electrical@precisionpipes.com | www.precisionpipes.com