

PART OF THE PROCESSING EQUIPMENT



SATYA GROUP



GUJARAT FIRST, Manufacture of Shade Net Machine & Slitting Machine.
SHED NO C1/84, PLOT NO 531, 100 SHED AREA CHANOD GIDC VAPI 396195
WEB: www.satya.group | E-mail satya@satya.group
M: +917878525278 , +919377518200





WARP KNITTING (SAFETY NET) SHADE NET MACHINE ELECTRONIC SYSTEMS

S.No	Model No	Machine Type	Machine Size	Machine Weight	Motor Power		Speed (row/Mintue)
					Main Motor	Inching Motor	
1	SG - RE4	SG - 260	8230X1700X2400	10500	10	1.5	200-380
2	SG - RE2	SG - 260	8230X1700X2400	9500	10	1.5	200-380
3	SG - RE2	SG - 260	8230X1700X2400	9000	10	1.5	200-380
4	SG - RE4	SG - 130	4700X1700X2400	5000	5	1	200-400
5	SG - RE2	SG - 130	4700X1700X244	4500	5	1	200-400
6	SG - RE2	SG - 130	4700X1700X2400	4000	5	1	200-400

Usage :

This Machine Is Used to Produce Shade Net, Garden Net, Safety Net, Building Contraction Net, Agricultural Net

Features :

The Machine Is Equipped With Centrey Cam And Open Cam Servo Systems Gsm Control systems 2 Rollers Positive Yarn Let-Off System.

Three Type Models

First Model

Grade fully automatic

1) Fully Automatic With Servo Systems Warp Knitting Net machine AdvanceTechnology- (4 Bar)Systems With Mono-Mono Attachment.

(i) Auto Design Change Any Time & Auto GSM Control Systems 35% , 55% , 75% , 90% ,Etc.. 4bars Ground

(ii) Less Maintenance Fully Synchronized.

(iii) Accident Safety On Slitting Machine.


Needle Type : Latch Needle

Gauge : E4, E6, E8, E9, E12, E14

Bar Number : 2-4

Nominal Width : 130" , 260"

Take-up Manner : 2 Rollers With Friction Drive, Center Shaft Drive, 2 Rollers Friction Drive. Separately-Standing, Center shaft Drive, Separately Standing.

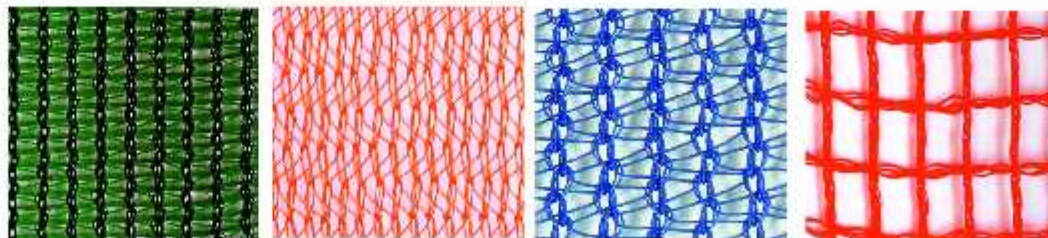

Second Model Grade automatic

(i)Auto Design Change Any Time & Auto Gsm Control Systems 35% , 55% , 75% , 90% ,Etc.. 2bars Ground

(ii)LessMaintanancoFully Synchronized.

(iii)Accident Safety On Slitting Machine Extra Charges.

Needle Type : Latch Needle

Gauge : E4, E6, E8, E9, E12, E14

Bar Number : 2-4

Nominal Width : 130" , 260"

Take-up Manner : 2 Rollers With Friction Drive, Center Shaft Drive,

2 Rollers Friction Drive.Separately-Standing.

Center shaft Drive, Separately Standing.



Third Model Grade Semi Automatic

(i) Auto Gsm Control Systems 50% , 75% , 90% ,Etc.,

(ii)Less MaintananceFully Synchronized.

(iii)Accident Safety On Slitting Machine Extra Charges.


Needle Type : Latch Needle

Gauge : E4, E6, E8, E9, E12, E14

Bar Number : 2-4

Nominal Width : 130" , 260"

Take-up Manner : 2 Rollers With Friction Drive, Center Shaft Drive, 2 Rollers Friction Drive. Separately-Standing, Center shaft Drive, Separately Standing.

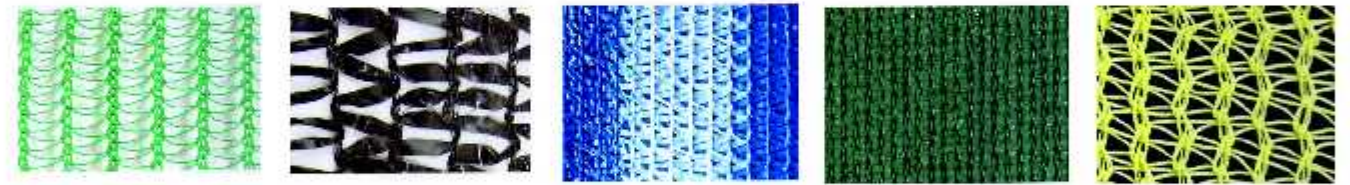

SLITTING MACHINE SIZE

Machine size	Machine Weight	Motor Power	
		Main Power	Inching Motor
72"X2	4000	2 HP	1 HP
68"X2	3800	2 HP	1 HP
62"X2	3500	2 HP	1 HP
58"X2	3300	2 HP	1 HP