



extremepackaging machines

EXTREMEPACKAGING MACHINES

Packing , Coding Machines and Materials

BOX STRAPPING MACHINE ES

SPECIFICATION



STRAP WIDTH	9-15MM
SPEED	1.5 SEC/STRAPS
POWER SUPPLY	1-PHASE,50/60HZ
POWER CONSUMPTION	0.65 KW
MACHINE TENSION	5-60 KG
MACHINE DIMENSION	895X565X735 (MM)
MACHINE WEIGHT	90 KGS

Honey Copper wire motor. Instant heat in only 20 sec. Magnetic Drive for faster speed packing.
One touch machine operation energy saving mode activate within 1.5 sec of non-use and allows for instant operation.

BOX STRAPPING MACHINE (FLOOR)

SPECIFICATION



STRAP WIDTH	9-15MM
SPEED	1.5 SEC/STRAPS
POWER SUPPLY	1-PHASE,50/60HZ
POWER CONSUMPTION	0.65 KW
MACHINE TENSION	5-60 KG
MACHINE DIMENSION	895X565X735 (MM)
MACHINE WEIGHT	90 KGS

Honey Copper wire motor. Instant heat in only 20 sec. Magnetic Drive for faster speed packing.
One touch machine operation energy saving mode activate within 1.5 sec of non-use and allows for instant operation.

BOX STRAPPING MACHINE (FULLY AUTOMATIC)

SPECIFICATION



POWER	380V50HZ3PH
ALUMINIUM ARCH SIZE	850X600 / 250X600(MM)
P.P. STRAP	9X0.55 MM / 12X0.55 MM
CORE INNER DIA	200 MM
CORE WIDTH	200 MM
CONTROL	TIMER + RELAY

3 motors with Emergency stop switch.

BOX STRAPPING MACHINE (FULLY AUTOMATIC WITH HYDRAULIC)



SPECIFICATION

POWER	380V50HZ3PH
ALUMINUM ARCH SIZE	1250X600 MM
P.P. STRAPS	9X0.55 MM / 12X0.55 MM
CORE INNER DIA	200 MM
CORE OUTER DIA	200 MM
CONTROL	PLC + RELAY

Cylinder Pressure Tyre
Steel Flange
3 motors with emergency stop switch.

CONTINUOUS BAND SEALER (HORIZONTAL)



SPECIFICATION

VOLTAGE	AC 220/50	110/60
SEALING SPEED (m/min)	0-12 (0-16)	
SEALING WIDTH (MM)	10	
TEMP. CONTROL RANGE	0-300 C (STEPLESS ADJUSTABLE)	
SINGLE PACKAGE LOAD	2.5 (KG) (MAX)	
MAX OVERALL LOAD.	5 KG (MAX)	
EXTERNAL DIMENSION	840X380X320	

Suitable for BOPP, multi layer, laminated, Alu. foil, all type of sealable materials in every thickness.
Sealing length is unlimited.

CONTINUOUS BAND SEALER (VERTICAL)



SPECIFICATION

VOLTAGE	AC 220/50	110/60
SEALING SPEED (M/MIN)	0-12 (0-16)	
SEALING WIDTH (MM)	10	
TEMP. CONTROL RANGE	0-300 C (STEPLESS ADJUSTABLE)	
SINGLE PACKAGE LOAD.	2.5 KG	
MAX OVERALL LOAD.	5 KG	
EXTERNAL DIMENSION	840X380X450 MM	

It can seal plastic films in different materials.

CONTINUOUS BAND SEALER (5KG)



SPECIFICATION

POWER SUPPLY	SINGLE PHASE 220V/50HZ
POWER CONSUMPTION	50W
SEALIN SPEED	0 TO 12 mtr./min.
SEALING WIDTH	12 MM
TEMPERATURE	0 TO 300 C
DIMENSION	17X34X28 INCH
WEIGHT	45 KG

Suitable for BOPP, multilayer, Laminated, Alu. foil, all type of sealable materials in every thickness.
Sealing length is unlimited.

CONTINUOUS BAND SEALER (20KG)



SPECIFICATION

PACKING CAPACITY	10 TO 15 POUCH PER MIN
POUCH CAPACITY	1 KG TO 20 KG LAMINATED POUCH
POWER	230 VOLT, 1 PHASE
HEATER	500 WATTS, 2 NO.
MOTOR	180 VOLTS WITH GEAR BOX MOTOR
SEALING SIZE	12 MM
MACHINE WEIGHT	VERTICAL - 80KG
CONVEYER	48"X9" WITH GUIDE
MACHINE HEIGHT	ADJUSTABLE

CUP SEALER (SEMIAUTOMATIC)



SPECIFICATION

TYPE	MANUAL
POWER	315W
DIMENSION	205X265X460 MM
VOLTS	220V/50HZ
OUTPUT	300-400 CUP/HR

CUP SEALER (AUTOMATIC)



SPECIFICATION

TYPE	SEMI AUTOMATIC
POWER	360W
DIMENSION	282X360X535 MM
VOLTS	220V/50HZ
OUTPUT	300-500 CUP/HR

CUP SEALER (FULL AUTOMATIC)



SPECIFICATION

TYPE	FULL AUTOMATIC
POWER	360W
DIMENSION	282X360X535 MM
VOLTS	220V/50HZ
OUTPUT	300-500 CUP/HR

ALUMINIUM FOIL SEALER



These Foil Sealer machines are used to pack various products. We offer these Foil Sealing Machines at very affordable rates.

Features:

- Hand Operation
- Sealing diameter to suit your requirement
- Low maintenance
- High efficiency
- Smooth operations

INDUCTION SEALER



SPECIFICATION

CAP DIAMETER	± 20-100mm / 50-150mm
WORKING VOLTAGE	220V/50-60HZ
CONSUMPTION	500W
WEIGHT	± 5 KG

Used for sealing the caps of plastic and glass containers in order to protect the packed products from leakage and dust.
Adjustable Sealing time for different films.
Variable Sealing settings.
No heat up required.
Safe and efficient.

INDUCTION SEALER (FULLY AUTOMATIC)



SPECIFICATION

INPUT VOLTAGE	AC 220 ±10%, 50hz
SEALING CURRENT	STATIC<2A, DYNAMIC<10A
OPERATING FREQUENCY	70-80 KHZ
OUTPUT POWER	≤2000w
BOTTLES HEIGHT	40-400MM
SEALING DIAMETER	20mm-130mm
SEALING SPEED	2 TO 12 M/MIN
EXTERNAL DIMENSIONS	115X60X40 MM
CONVEYER BEARING LOAD	≤20 KG

L SEALER

SPECIFICATION

TYPE	L SEALER
POWER	15 AMP SINGLE PHASE
SEALING SIZE	15X20 INCH



GRANULE FILLING MACHINE (SINGLE CHAMBER)



SPECIFICATION

PACKING RANGE	10-1200 g
ACCURACY	± 0.2 g (depending on product)
PACKING SPEED	8-12 bags/ min
MACHINE SIZE	35X48X119.5 CM
MACHINE WEIGHT	40 KG

GRANULE FILLING MACHINE (DOUBLE CHAMBER)



SPECIFICATION

PACKING RANGE	10-1200g x 2
ACCURACY	± 2g (depending on product)
PACKING SPEED	10-25 BAGS/MIN
MACHINE SIZE	50*52*142 CM
MACHINE WEIGHT	70 KG

GRANULE FILLING MACHINE (5KG)



SPECIFICATION

PACKING RANGE	100-5500 G
ACCURACY	WITHIN 0.3% OF NATIONAL STD.
PACKING SPEED	8-12 BAGS/MIN
MACHINE SIZE	45*55*160 CM
MACHINE WEIGHT	60 KG

LIQUID FILLING MACHINE (UPTO 500ML)



SPECIFICATION

VOLTAGE	AC220V 50HZ
POWER	20W
AIR PRESSURE	0.4-0.6 MPA
FILLING SPEED	5-30 BOTTLES/MIN
FILLING RANGE	50-500 ML
FILLING ACCURACY	≤ ± 1%

LIQUID FILLING MACHINE (UPTO 1000ML)



SPECIFICATION

VOLTAGE	AC 220V 50HZ
POWER	20W
AIR PRESSURE	0.4-0.6 MPA
FILLING SPEED	5-30 BOTTLES/MIN
FILLING RANGE	100-1000 ML
FILLING ACCURACY	± ± 1%
EXTERNAL DIMENSION	840X380X320

PET TOOLS



SPECIFICATION

AIR PRESSURE	0.5-0.7 MPA
STRAP MATERIAL	POLYSTER
STRAP THICKNESS	0.5-1.5 MM
STRAP WIDTH	13MM-19MM
MBRATION	ACCORDANT WITH ISO5349
CONSUMPTION OF AIR COMPRESSED	0.3L/MIN
ADJUST. RANGE OF WELDING TIME	2-5 SEC
DIMENSIONS	70X149.5X173 MM

RIBBON PRINTING MACHINE (MANUAL)




SPECIFICATION

WORKING MODEL	BY HAND
SIZE KF WORDS	ONE LINE - 2.5X3.5 MAX 12 WORDS
MAX LINES	3 LINE MAX - 36 WORDS
RIBBON	30MM
WORK TEMPERATURE	150-200 C
POWER/VOLTAGE	40W 220V/50HZ
WEIGHT	2 KG

Suitable for all kinds of packaging materials such as plastic bag, aluminium foil, paper bag, leather etc.

RIBBON PRINTING MACHINE (SEM AUTOMATIC)

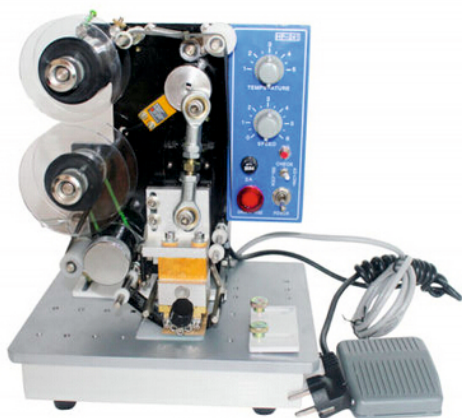

SPECIFICATION

SPEED	10-110 TIMES/MIN
PRINTING AREA	ONE LINE -2X4X13, APP, 12PCS OF TYPE
PRINTING TYPE	ARABIC NUMBERS, ENGLISH LETTERS, CHINESE CHARACTERS
POWER	AC220V/50HZ, 200W
SIZE	255X225X315 MM
WEIGHT	7 KG
MOTOR	REDUCER MOTOR: 15W, 220V, ROTATION SPEED 140 TURN./MIN

The machine adopts hot stamp instead of liquid ink. it especially suitable for industries of food and medicine to avoid the anxiety of ink contamination.

BATCH CODING MACHINE



SPECIFICATION

VOLTAGE(V/HZ)	AC 220/50 110/60
SOLID INK ROLLER	35X32 MM
PRINTING SPEED	≤300 pcs/min
OBJECT SIZE (MM)	L:50-100 W:30-190 / L:50-550 W:30-300
MAX PRINTING LINE	T arrange(10.5PT):11 lines (max 10 Characters/line) R arrange(10.5PT):8 lines (max 8 Characters/line)
PRINTING SIZE	WITHIN 60-250 MM
TYPE SIZE (MM)	2X1.5 (8PT) 2.5X2(9PT) 3X3(10.5PT) 4X2.5(18PT)

Suitable for printing label on paper, thin cardboard, plastic films and aluminum foil.

PAD PRINTER MACHINE



SPECIFICATION

POWER	AC220V/50-60HZ 1PHASE
PRINT SPEED	0-60 TIMES/MIN
MAX PRINTING AREA	60*30 MM
USING POWER	100W
PRINTER HEIGHT	0-300 MM
MOULD SIZE	85X175 MM
MACHINE SIZE	400X300X470 MM
MACHINE WEIGHT	21 KG

INKJET PRINTER (M7)



SPECIFICATION

NOZZLE	THERMAL INK JET 2.5
CPU	QUAD CORE 1.4 GHZ
DISTANCE	BEST QUALITY 2-5 MM
DEFINATION	MAX 600DPI
TYPE	english text number, symbols, QR code,barcode, pictures, dates, counter, variable data
APPLICATION	BOARDS, CARTON, STONE, PIPE, CABLE ETC.
INKJET ENGINE	HP ORIGINAL IMPORTED INKJET ENGINE
INTERFACE	USB, RS232, BLUETOOTH 4.0, WIFI
HEIGHT	MAX 12.7 MM PER NOZZLE

INKJET PRINTER (M6)



SPECIFICATION

NOZZLE	THERMAL INK JET 2.5
CPU	QUAD CORE 1.4 GHZ
DISTANCE	BEST QUALITY 2-5 MM
DEFINATION	MAX 600DPI
TYPE	english text number, symbols, QR code,barcode, pictures, dates, counter, variable data
APPLICATION	BOARDS, CARTON, STONE, PIPE, CABLE ETC.
INTERFACE	USB, RS232, BLUETOOTH 4.0, WIFI
HEIGHT	MAX 12.7 MM PER NOZZLE

INKJET PRINTER (MX1)




SPECIFICATION

NOZZLE	THERMAL INK JET 2.5
CPU	CORTEX A9 QUAD CORE
DEFINATION	MAX 600DPI
TYPE	english text number, symbols, QR code,barcode, pictures, dates, counter, variable data
INKJET ENGINE	HP ORIGINAL IMPORTED INKJET ENGINE
INTERFACE	USB, BLUETOOTH 4.0, WIFI

Embedded Linux operation system. Support using smartphone to control device via bluetooth. Upgrade software firmware remotely via Wi-Fi connection.
Convinient for product line.
High Quality but low cost.

ROUND BOTTLE LABELLING MACHINE

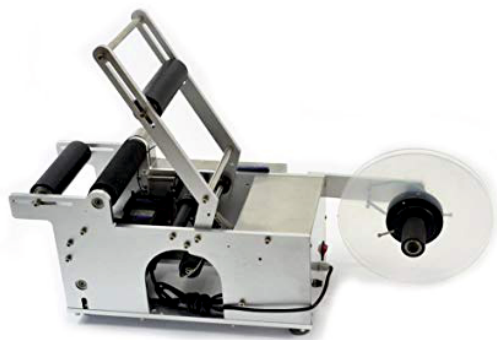

SPECIFICATION

LABELLING SPEED	20-40 PCS/MIN
CONTAINER DIAMETER	20-120 MM
MIN LABEL SIZE	W26*L25 MM
MAX LABEL SIZE	W150*L230 MM
LABEL ROLLER MAX DIA.	≤ 250 mm
LABEL PRECISION	± 0.5 mm
MACHINE SIZE	660*360*460 MM
WEIGHT	24 KGS
POWER	220V/120V 50/60 HZ 120W

ROUND BOTTLE LABELLING MACHINE WITH BATCH CODING



SPECIFICATION

LABELLING SPEED	20-40 PCS/MIN
CONTAINER DIAMETER	20-120 MM
MIN LABEL SIZE	W26*L25 MM
MAX LABEL SIZE	W150*L230 MM
LABEL ROLLER MAX DIA.	≤ 250 mm
LABEL PRECISION	± 0.5 mm
MACHINE SIZE	660*360*520 MM
WEIGHT	33 KGS
POWER	220V/120V 50/60 HZ 120W

SHRINK TUNNEL 6X8



SPECIFICATION

POWER	1 PHASE + N
POWER CONNECTION	4KW
SPEED	VARIABLE
CHAMBER SIZE	36*08*06 INCH
MACHINE SIZE	54*14*28 INCH
APPLICATION	Stationary, food products, hardware, toys, games, electronic components etc.

User friendly, Low power consumption, Digital temp. Controller, High-term Silicon sleeves filled Heavy Conveyor, efficient heating chamber with Full Insulation.

SHRINK TUNNEL 4525



SPECIFICATION

VOLTAGE	200/50 1PHASE, 220/60 3 PHASE
POWER	6.5 KW
LOADING	10 KG
SPEED	0-10 M/MIN
TUNNEL SIZE	900*450*(50-250)
DIMENSIONS	1200*650*1100 MM
NET WEIGHT	90 KG

Both the height of tunnel and shutters on two sides are adjustable. Adopts single hot wind tunnel. This machine applied to heat shrinkable films such as PVC, POF, PP etc.

CARTON WRAPPING



SPECIFICATION

VOLTAGE	220V 50-60HZ
HEATER POWER	2KW ADJUSTABLE
CONVEYER SPEED	0-15 M/MIN
MAX SEALING SIZE	550*450 MM
MAX CONVEYER LOAD.	25KG
PACKING SIZE	1470*820*970 MM
MACHINE WEIGHT	95 KG
MACHINE DIMENSION	6*20*15 INCH
CUTTING FILM	P.O.F., P.V.C., PP, PE

PALLET WRAPPING



SPECIFICATION

TURN TABLE DIAMETER	1500/1800/2100/2500 MM
TURN TABLE HEIGHT	100MM ABOVE FLOOR
TURN TABLE SPEED	VARIABLE TO 10RPM
MAX POWER STRETCH	300%
POWER REQUIREMENT	2/3/4 HP
PRODUCTION SPEED	15-20 PALLETS PER HOUR
PALLET HEIGHT	2340 MM
MAX WEIGHT/ PALLET	1500 KG
SHIPPING DETAILS	1250KG/4.5 M³

TAPE MASTER 2INCH



SPECIFICATION

VOLTAGE	AC 220/50
POWER	200 W
MAX CARTON SIZE	500*600 MM
MIN CARTON SIZE	140*110 MM
TAPE SIZE	2 INCH

TAPE MASTER 3INCH



SPECIFICATION

VOLTAGE	AC 220/50
POWER	200 W
MAX CARTON SIZE	500*600 MM
MIN CARTON SIZE	140*110 MM
TAPE SIZE	3 INCH

VACCUM SEALER (SINGLE CHAMBER)



SPECIFICATION

VOLTAGE	220/50 V/HZ
SEALING POWER	500W
SEALING WIDTH	10 MM
VOLUME CHAMBER	440*420*100 MM
SEALING LENGTH	400 MM
AIR CHARGING VOLUME FOR VACCUM PUMP	20 M³/Hr
MATERIAL VACCUM CASE	FIBRE
DIMENSION	540*480*1010 MM
WEIGHT	110 KG

VACCUM SEALER (DOUBLE CHAMBER)



SPECIFICATION

VOLTAGE	DOUBLE (SS HULL)
SEALING POWER	1500 W
SEALING WIDTH	750 MM
VOLUME CHAMBER	580*550*110 MM
SEALING LENGTH	500 MM
AIR CHARGING VOLUME FOR VACCUM PUMP	40 M³/Hr
MATERIAL VACCUM CASE	STAINLESS STEEL
DIMENSION	1260*780*960 MM
WEIGHT	220 KG

WEB SEALER WITH SHRINK MACHINE



SPECIFICATION

CHAMBER SIZE	48*22*16 INCH
MACHINE SIZE	84*30*58 INCH
POWER	3PHASE + N
POWER CONGESTION	13.5 KW
SPEED	VARIABLE

Cooling Chamber & free roller stand
size 27" Sealing with hotbar sealing system
With Pneumatic Pusher & Auto Sensor conveyor
With Digital P.L.C. system

BAG CLOSER MACHINE



SPECIFICATION

SEWING SPEED	1600-1800 STITCHES/MIN
DIMENSION	12*12*13 INCH
STITCH LENGTH	3.5 STITCHES/INCH
MAX MATERIAL THICKNESS	10 MM
CUTTER TYPE	MECHANICAL
THREAD	8oz. Cotton or Synthetic thread cones.
NEEDLE SIZE	DB X 1 200/25 GROZ-BECKERT
TYPE OF STITCH	SINGLE THREAD/ CHAIN STITCH
CLOSING SPEED	5-8 sec/bag, 39fpm at 3.5 stitches/inch

HYDRAULIC TROLLEY



SPECIFICATION

Standard Frames			
Dim. A	Dim. B	Dim. C	Dim. L
1150	520	200	1510
1150	685	365	1510

Wheels		
STEER	NYLON(2)	180*50 mm
LOAD TANDEM	NYLON(2)	82*70 mm

It is a light weight pallet truck with a steering angle of 210 degrees. Weighing only 67 Kg. It is designed for easy manoeuvrability, particularly in confined areas.

IMPULSE SEALER



MANUAL SEAER



B.O.P.P. TAPES



ALUMINIUM CIRCLES



BOX STRAPPING (MANUAL & H.S.)



SHRINK FILMS



SHRINK LABELS



STANDY POUCH



**INNOVATIVE
DESIGNS**

**QUALITY
PRODUCTS**

**BEST
SERVICE**

**24/7
AVAILABLE**



extremepackaging machines

Packing , Coding Machines and Materials

EXTREMEPACKAGING MACHINES

258, Scheme No.114 Part-1 , Vijay Nagar
Indore - 425010, Madhya Pradesh, India.

Mobile No. : +917828298400 +916261303140
E-mail : extrememachines965@gmail.com