


HORIZONTAL HOSE CRIMPING MACHINES

## INTRODUCTION

"ANISH" Hz-300 Horizontal Hose crimping machines can extend their working range of Re-forced Hose Pipes from 6 mm to 50 mm diameter (Nominal bore).


The machine is also provided with replaceble Precrimping tools.

All the operational features are identical to that of previous model Hz-260.



## **SALIENT FEATURES:**

- Maximum crimping Size 2 ½" I.D. Hose with 4 spirals and 2" I.D. with 6 spirals.
- Hose feeding either from front or rear end of the machine.
- Electrical setting device / mechanical setting devices for Crimp depth.
- Operation with Push Button Control.
- Standard 3 phase motor.
  (single phase motor on request)
- Crimping and die retraction with hydraulic cylinders.
- Setting of Crimp depth within 0.1 mm.

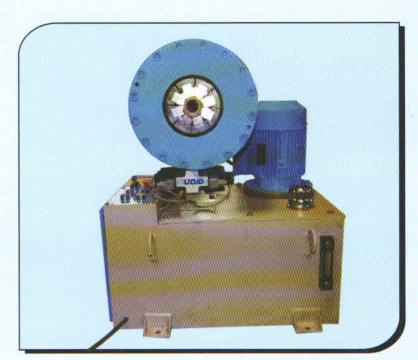

## Available with Standard Die Sets.

φ16, φ19, φ22, φ26, φ30, φ34, φ39, φ45, φ50, φ55, φ63, φ69, φ75, φ85.

## **OPTIONAL ACCESSORIES**

- Optional Die Sets : φ100
- Special Die Sets: Any size beyond this but less than \( \phi 85.\)
- Foot Switch Control.
- Microprocessor based controls with programmable settings.

