



OUR PROCESS


Design Co-Creation with Customer

- Colour selection (base and aggregate)
- Drafting of pattern (aggregate size & distribution)
- Base setting (thickness & pattern-jointless/with joint/inlays)


Once the design is developed, the colour shades will be confirmed, and samples will be created



Space Recce Site visit to assess existing floor base – level, moisture & cracks



Space Correction Ground will be leveled & primer will be applied






OUR PROCESS

Terrazzo Pre-Mix Preparation

Lead time of 2 weeks required for preparation. Once prepared, the pre-mix is transported with care to the site in custom bags.

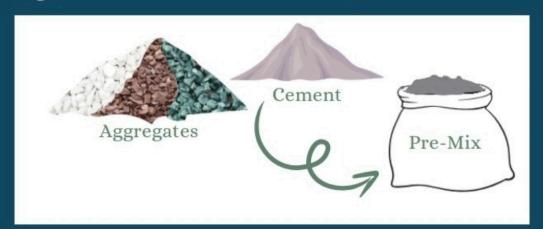

5

In-Situ Laying

Post application, the terrazzo is left to dry & cure for 7 days





Finishing Touch

Once dry, the terrazzo is ground, polished and sealer is applied







WE BELIEVE THE WORLD OF TERRAZZO IS BRIMMING WITH UNTOUCHED DESIGN OPPORTUNITIES

BASE COLOUR SELECTION

Once the RAL colour number is selected, intensity of shade can be worked upon

AGGREGATE TYPE & COLOUR SELECTION



Stone Chips (incl. marble & granite inlays)



Glass Chips



Metal Dividers



Semi-precious Sprinkles

Venetian

TERRAZZO TYPE SELECTION





Palladiana






Intricate Designs

We give you the freedom to create an one-of-a-kind terrazzo design with a lead time of ~2 weeks. A sample will be developed through careful materials selection in collaboration with you to achieve the desired final look.





WHITE TONES



















SIGNATURE STONEX CREATIONS

BEIGE, GREY & BLACK TONES



CASE STUDIES



EPOXY TERRAZZO IN AIRPORTS





CASE STUDIES



EPOXY TERRAZZO IN COMMERCIAL SPACES





