
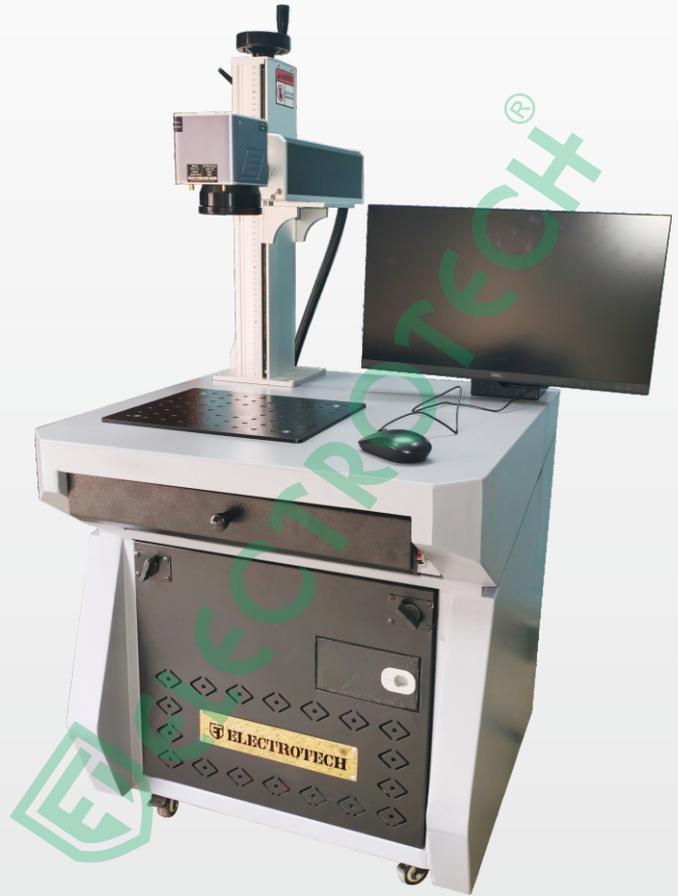


APPLICATIONS

- Utensils
- Jewellery
- Electronics
- Automobile
- Commercial
- Engineering
- Solar Industry
- Tools & Toolings
- Medical & Surgical
- Die & Mould Engraving
- Kitchenware & Bath Fittings

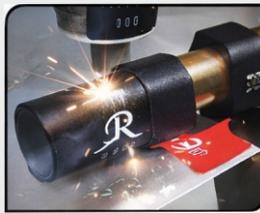

Model	Euro - LM 20	Euro - LM 30	Euro - LM 50	Euro - LM 100
Output Power	20 W	30 W	50 W	100 W
Wavelength	1064 nm			
Power Adjustment	0 to 100 %			
Cooling	Air Cooled			
Min. Line Width	Min. 0.03 mm (Depend on Material)			
Max. Speed	Max. 10000 mm/s (Max. Linear Speed)			
Marking Depth	0.01~0.3mm (Depends on Material)			
Min Character Height	0.5 mm			
Marking Range	145 mm X 145 mm (Standard) Optional : 70 x 70 mm, 175 X 175 mm, 200 x 200 mm, 270 x270 mm, 300 X 300 mm			
Supporting Format	Support PLT, DXF, BMP File etc., Using SHX TTF Character Storage Directly			
Single Pulse Energy (mj)	1.0@20KHz	1.0@30KHz	1.0@50KHz	1.0@100KHz
Repetition Frequency Range	20-60 KHz	30-60 KHz	50-100 KHz	20-200 Khz
Output Power Stability	<3%			
Beam Quality(M2)	<1.5		<1.8	
Pulse Width(ns)	90-130 KHz		90-150 KHz	50-130 KHz
Max Power Consumption	200 Watt	250 Watt	350 Watt	500 Watt