


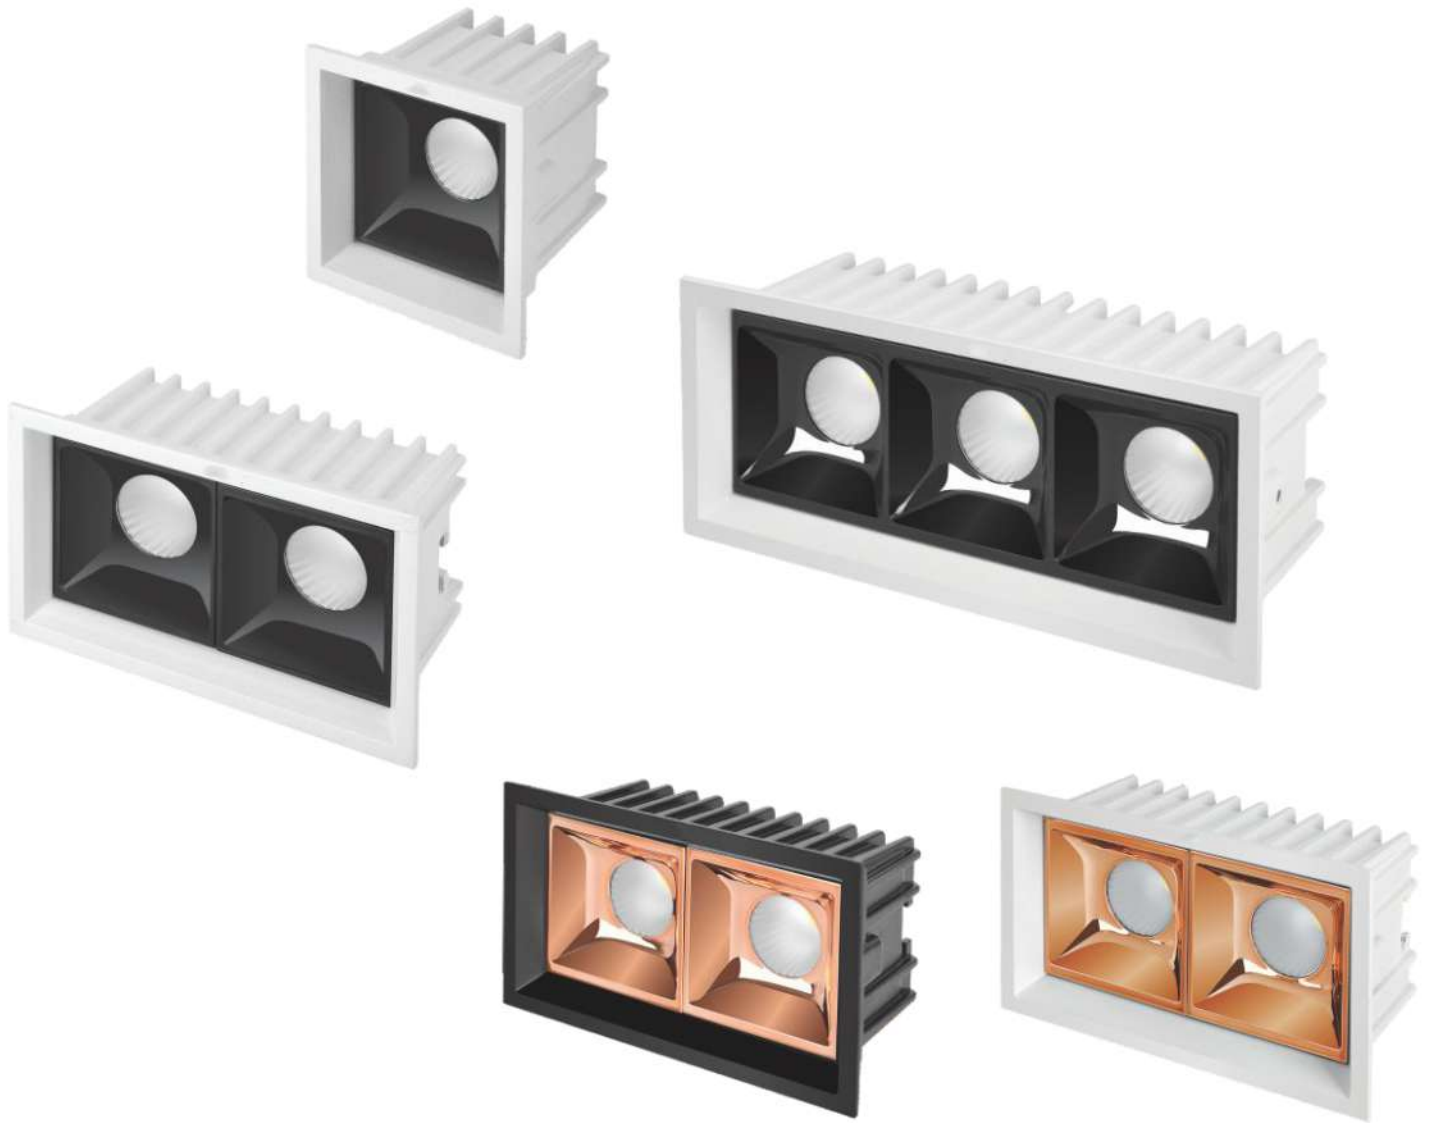

LINEA 50 SPOT LIGHT

MODEL	MODULE	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALLN5008	1	8	70 x 70	60 x 60	60	45°
ALLN5016	2	16	120 x 70	110 x 60	60	45°
ALLN5020	3	20	162 x 70	152 x 60	60	45°
ALLN5006	1	6	70 x 70	60 x 60	60	45°
ALLN5012	2	12	120 x 70	110 x 60	60	45°
ALLN5018	3	18	162 x 70	152 x 60	60	45°

CREE COB USED IN 8, 16 WATT & 20 WATT

ALUMINIUM DIE-CAST MATERIAL

INDOOR RECESSED LIGHTING

BRANDED LED USED CRI>80;140LM/W

BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING

BEAM ANGLE 45° AVAILABLE

USED FOR ANTIGLARE LIGHTING

CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE


COLOR AVAILABLE : WH/WW/NWH

PROTECTION RATING: IP20

FINISH AVAILABLE : PKW & BK

Control Type :



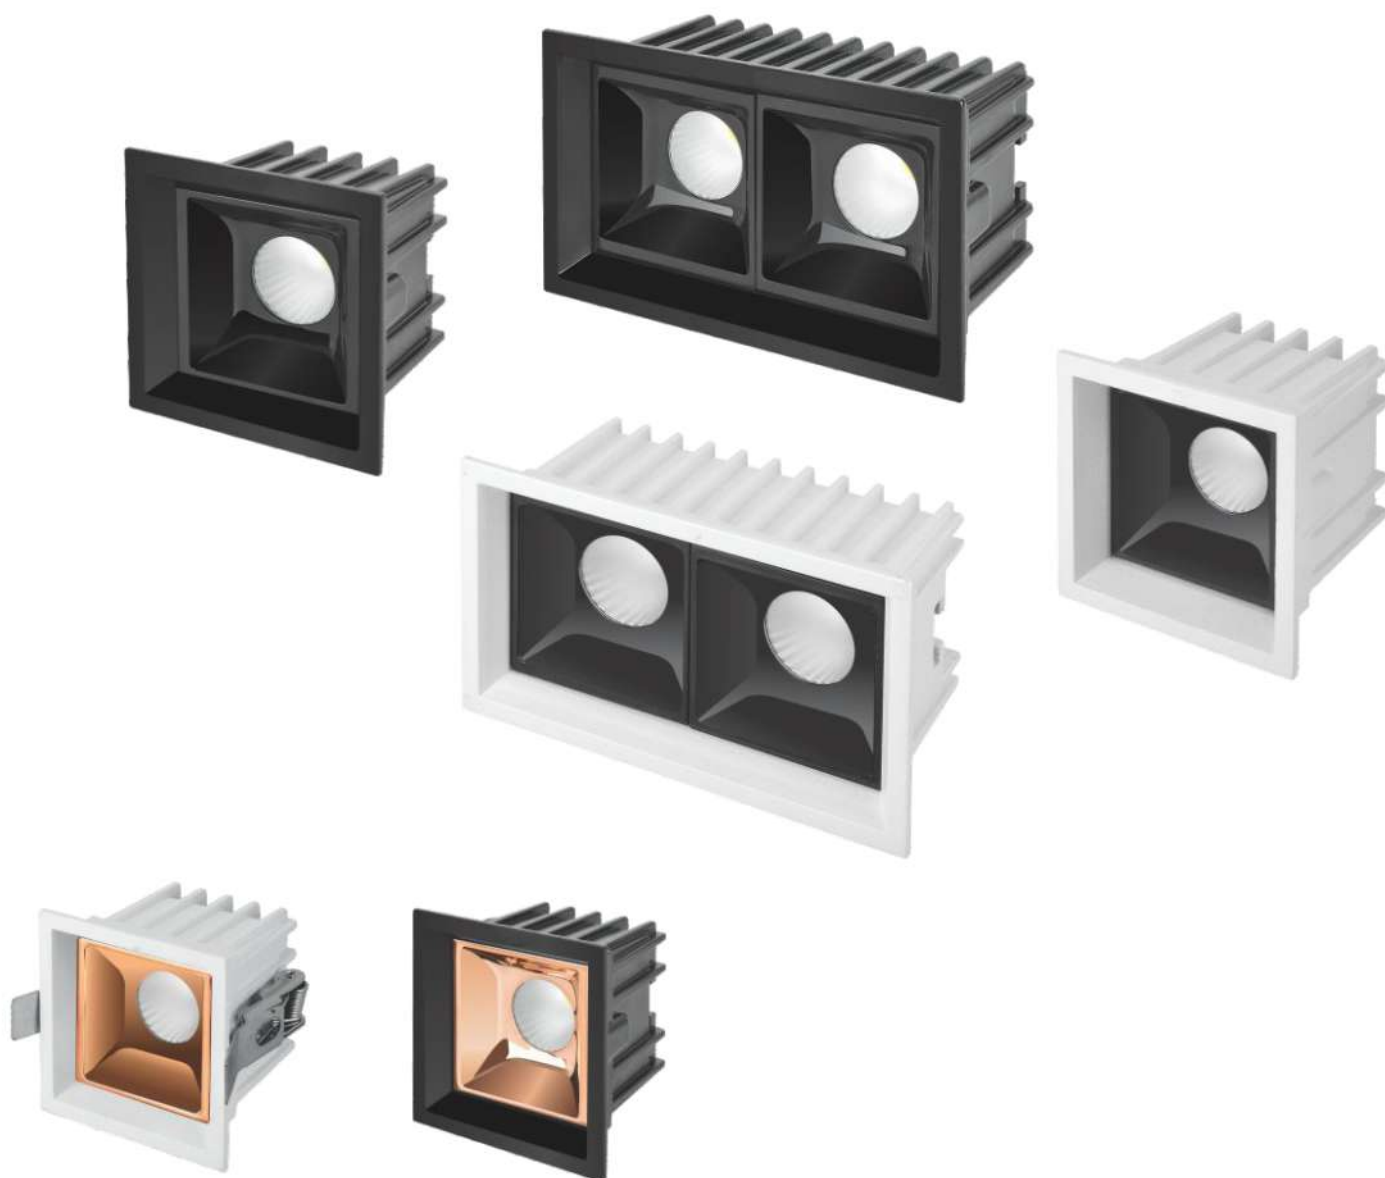

LINEA 70 SPOT LIGHT

MODEL	MODULE	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALLN7015	1	15	90 x 90	80 x 80	75	45°
ALLN7030	2	30	160 x 90	150 x 80	75	45°
ALLN7012	1	12	90 x 90	80 x 80	75	45°
ALLN7024	2	24	160 x 90	150 x 80	75	45°

CREE COB USED IN 15 WATT & 30 WATT

ALUMINIUM DIE-CAST MATERIAL

INDOOR RECESSED LIGHTING

BRANDED LED USED CRI>80;140LM/W

BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING

BEAM ANGLE 45° AVAILABLE

USED FOR ANTIGLARE LIGHTING

CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE


COLOR AVAILABLE : WH/WW/NWH

PROTECTION RATING: IP20

FINISH AVAILABLE : PKW & BK

Control Type :



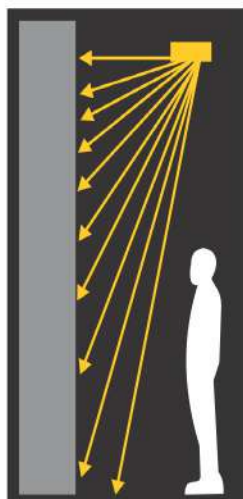


LED LINEA WALL WASHER


MODEL	WATT	OUTER	CUT OUT	HEIGHT
ALLNWW12	12	146 x 44	137 x 35	40
ALLNWW20	20	281 x 44	271 x 35	40

ALUMINIUM DIE-CAST MATERIAL
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140LM/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 USED AS WALL WASHER LIGHTING
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 COLOR AVAILABLE : WH/WW/NWH
 PROTECTION RATING: IP20
 FINISH AVAILABLE : PKW & BK

Control Type :



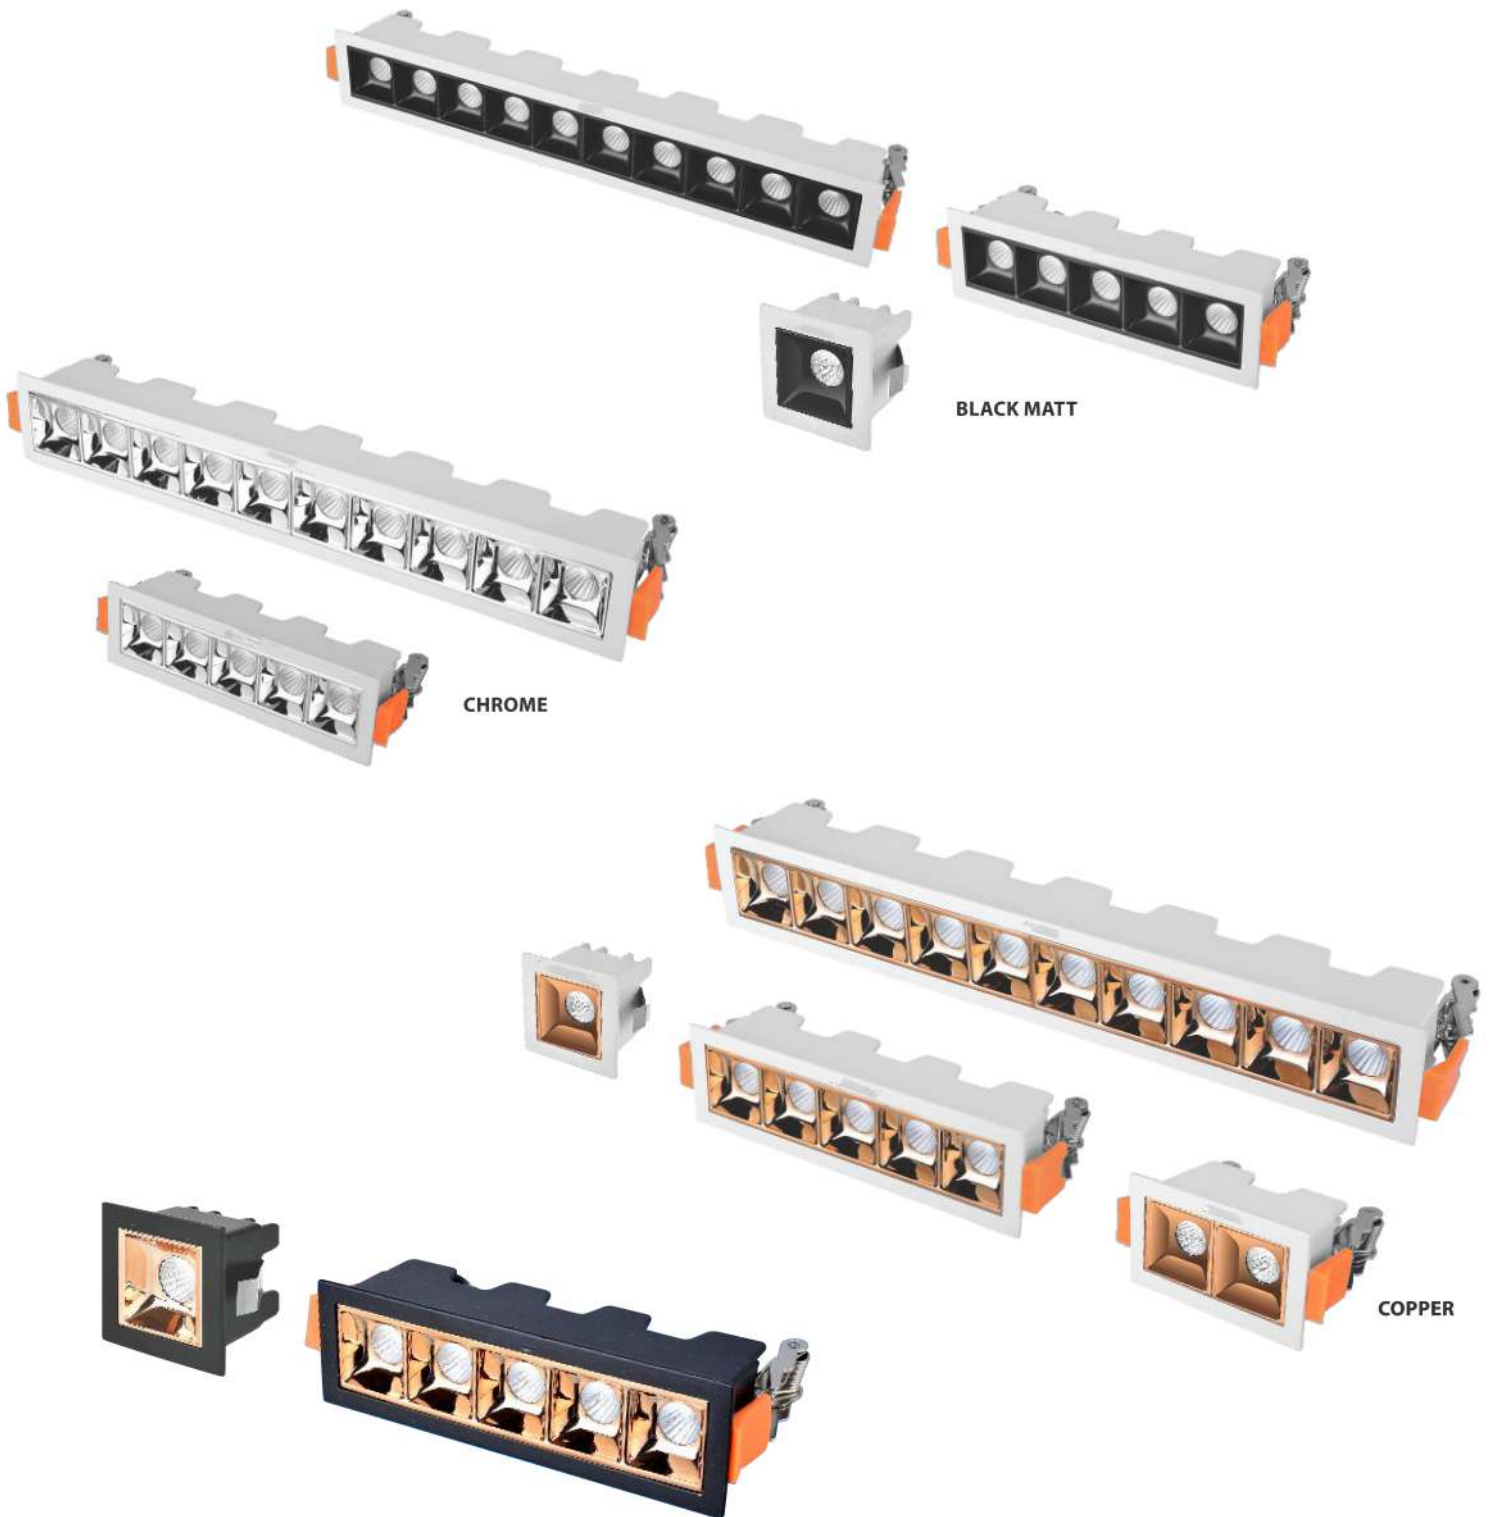

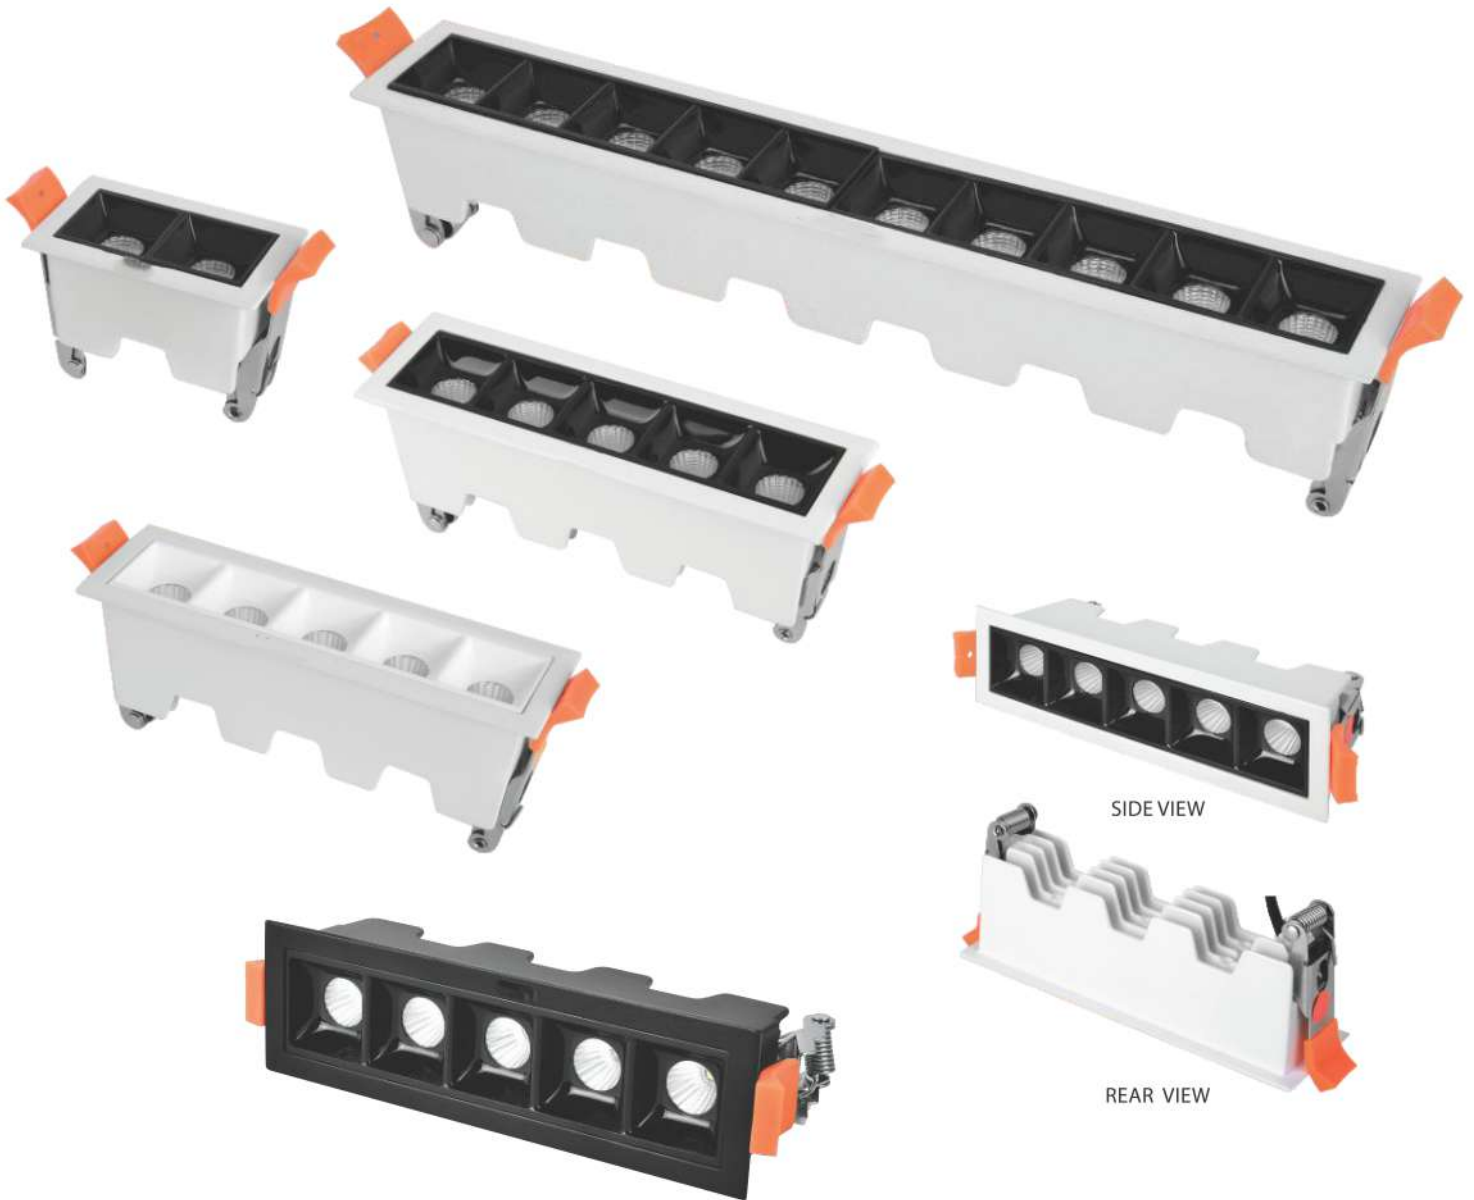

LINEA 30 SPOT LIGHT

MODEL	MODULE	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALLN3S	1	3	44 x 44	34 x 34	40	30°
ALLN5S	2	5	74 x 44	65 x 35	40	30°
ALLN12S	5	12	146 x 44	137 x 35	40	30°
ALLN24S	10	24	281 x 44	271 x 35	40	30°
ALLN30S	15	30	415 x 44	400 x 34	40	30°

ALUMINIUM DIE-CAST MATERIAL
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140LM/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 REFLECTORS AVAILABLE:
 GLOSSY BLACK/ MATT BLACK/WHITE/COPPER/CHROME
 BEAM ANGLE 30° AVAILABLE
 USED FOR ANTIGLARE LIGHTING
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 COLOR AVAILABLE : WW/NWH
 PROTECTION RATING: IP20
 FINISH AVAILABLE : PKW & BK

Control Type :





TOP VIEW



ALUMINIUM DIE-CAST MATERIAL
INDOOR RECESSED LIGHTING
BRANDED LED USED CRI>80;140LM/W
BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
BEAM ANGLE 80° AVAILABLE
CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
COLOR AVAILABLE : WH/WW/NWH
PROTECTION RATING: IP20
FINISH AVAILABLE : PKW & BK

LINEA DIFFUSED X

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALLN12DX	12	146 x 44	137 x 35	40	80°
ALLN20DX	20	281 x 44	271 x 35	40	80°

Control Type :




LINEA DIFFUSED

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALLN12DIF	12	146 x 44	137 x 35	40	80°
ALLN20DIF	20	281 x 44	271 x 35	40	80°

ALUMINIUM DIE-CAST MATERIAL
INDOOR RECESSED LIGHTING
BRANDED LED USED CRI>80;140LM/W
BEAM ANGLE 80°
CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
COLOR AVAILABLE : WH/WW/NWH
PROTECTION RATING: IP20
FINISH AVAILABLE : PKW & BK

Control Type :





TOP VIEW



REAR VIEW



LOW HEIGHT COB DOWNLIGHT
USED FOR HIGHLIGHTING PARTICULAR WALL
INDOOR RECESSED LIGHTING
BRANDED LED USED CRI>80;140LM/W
BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
ALUMINIUM DIE-CAST MATERIAL
COLOR AVAILABLE : WH/WW/NWH
PROTECTION RATING: IP20
FINISH AVAILABLE : PKW

Control Type :



TRIAC



COB WALL WASHER F40

MODEL	WATT	OUTER	CUT OUT	HEIGHT
ALF4012R	12	84	69	78
ALF4020R	20	107	88	85



REAR VIEW

MAGIC LED SPOTLIGHT

MODEL	MODULE	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALMG3S	1	3	51 x 51	41 x 41	55	38°
ALMG12S	3	12	128 x 50	118 x 42	55	38°
ALMG16S	4	16	90 x 90	80 x 80	55	38°
ALMG20S	5	20	205 x 50	195 x 42	55	38°
ALMG36S	9	36	130 x 130	120 x 120	53	38°

POWERED BY : OSRAM / CREE

COMPACT SIZE ANTIGLARE DOWNLIGHT
INDOOR RECESSED LIGHTING
BRANDED LED USED CRI>80;140LM/W
BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
ALUMINIUM DIE-CAST MATERIAL
COLOR AVAILABLE : WW/NWH
PROTECTION RATING: IP20
FINISH AVAILABLE : PKW & BK

Control Type :



TRIAC





REAR VIEW



GOLDEN
REFLECTOR



COPPER
REFLECTOR



CHROME
REFLECTOR

COMPACT SIZE ANTIGLARE DOWNLIGHT
LOW HEIGHT COB DOWNLIGHT
INDOOR RECESSED LIGHTING
BRANDED LED USED CRI>80;140LM/W
BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
BEAM ANGLE 45°
CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
REFLECTORS AVAILABLE: COPPER/CHROME/GOLD
CONSTANT CURRENT DRIVER
COLOR AVAILABLE : WH/WW/NWH
PROTECTION RATING: IP20
FINISH AVAILABLE : PKW & BK

Control Type :



OREO COB SPOTLIGHT

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALORE10R	10	80	70	45	45°
ALORE15R	15	100	85	55	45°



ORO COB SPOTLIGHT

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALORO10R	10	80	70	45	45°
ALORO15R	15	100	85	55	45°
ALORO20R	20	110	100	55	45°



TOP VIEW



REAR VIEW

COMPACT SIZE ANTIGLARE DOWNLIGHT
LOW HEIGHT COB DOWNLIGHT
INDOOR RECESSED LIGHTING
BRANDED LED USED CRI>80;140LM/W
BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
BEAM ANGLE 45°
CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
ALUMINIUM DIE-CAST MATERIAL
COLOR AVAILABLE : WH/WW/NWH
PROTECTION RATING: IP20
FINISH AVAILABLE : PKW & BK

Control Type :





CHROME



GOLD



MATT SILVER



CHAMPAGNE



NICKEL



COPPER



TOP VIEW



REAR VIEW

COOL COB SPOT LIGHT

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALCL7R	7	64	60	59	25°
ALCL12R	12	81	76	70	38°
ALCL15R	15	81	76	85	38°

ALUMINIUM DIE-CAST MATERIAL

INDOOR RECESSED LIGHTING

BRANDED LED USED CRI>80;140LM/W

BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING

BEAM ANGLE 38° AVAILABLE

USED FOR FOCUSED LIGHTING

CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE

COLOR AVAILABLE : WH/WW/NWH

PROTECTION RATING: IP20

FINISH AVAILABLE : PKW & BK

Control Type :






REAR VIEW

ALUMINIUM DIE-CAST MATERIAL
INDOOR RECESSED LIGHTING
BRANDED LED USED CRI>80;140LM/W
BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
BEAM ANGLE 38° AVAILABLE
CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
USED FOR FOCUSED LIGHTING
COLOR AVAILABLE : WH/WW/NWH
PROTECTION RATING: IP20
FINISH AVAILABLE : PKW & BK

Control Type :



GUSH COB SPOT LIGHT

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALGU3R	3	50	32	24	15°
ALGU72R	7	68	60	60	25°
ALGU12R	12	85	75	65	38°
ALGU15R	15	85	75	80	38°
ALGU18R	18	95	83	81	38°
ALGU24R	24	110	110	96	45°



SOLIS COB SPOTLIGHT

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALSO7R	7	68	56	60	25°
ALSO10R	10	76	68	60	38°
ALSO16R	15	76	68	75	38°



REAR VIEW

ALUMINIUM DIE-CAST MATERIAL
INDOOR RECESSED LIGHTING
BRANDED LED USED CRI>80;140LM/W
BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
BEAM ANGLE 38° AVAILABLE
CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
USED FOR FOCUSED LIGHTING
COLOR AVAILABLE : WH/WW/NWH
PROTECTION RATING: IP20
FINISH AVAILABLE : PKW & BK

Control Type :





TRIMLESS FLAVA COB SPOTLIGHT

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALTFL12R	12	73	66	73	38°



TOP VIEW



REAR VIEW



FLAVA COB SPOTLIGHT - ROUND

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALFL3R	3	38	28	27	15°
ALFL7R	7	68	60	62	25°
ALFL12R	12	85	75	73	38°
ALFL15R	15	85	75	88	38°
ALFL18R	18	95	81	92	38°
ALFL24R	24	120	110	96	45°

FLAVA COB SPOTLIGHT - SQUARE

ALFL7S	7	68	60	62	25°
ALFL12S	12	85	75	73	38°
ALFL15S	15	85	75	88	38°

ALUMINIUM DIE-CAST MATERIAL
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140LM/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 BEAM ANGLE 38° AVAILABLE
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 USED FOR FOCUSED LIGHTING
 COLOR AVAILABLE : WH/WW/NWH
 PROTECTION RATING: IP20
 FINISH AVAILABLE : PKW, BK & COPPER

Control Type :





REAR VIEW

ALUMINIUM DIE-CAST MATERIAL
INDOOR RECESSED LIGHTING
BRANDED LED USED CRI>80;140LM/W
BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
BEAM ANGLE 38° AVAILABLE
CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
USED FOR FOCUSED LIGHTING
CONSTANT CURRENT DRIVER
COLOR AVAILABLE : WH/WW/NWH
PROTECTION RATING: IP20
FINISH AVAILABLE : PKW

Control Type :



DEEP FLAVA COB SPOT LIGHT

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALDFL12R	12	90	80	95	38°



DEEP COB SPOTLIGHT


MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALDE7R	7	71	62	70	25°
ALDE12R	12	82	75	85	38°
ALDE16R	16	82	75	100	38°



REAR VIEW

ALUMINIUM DIE-CAST MATERIAL
INDOOR RECESSED LIGHTING
BRANDED LED USED CRI>80;140LM/W
BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
BEAM ANGLE 38° AVAILABLE
CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
USED FOR FOCUSED LIGHTING
COLOR AVAILABLE : WH/WW/NWH
PROTECTION RATING: IP20
FINISH AVAILABLE : PKW & BK

Control Type :





REAR VIEW

ALUMINIUM DIE-CAST MATERIAL
INDOOR RECESSED LIGHTING
BRANDED LED USED CRI>80;140LM/W
BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
BEAM ANGLE 38° AVAILABLE
CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
USED FOR FOCUSED LIGHTING
COLOR AVAILABLE : WH/WW/NWH
PROTECTION RATING: IP20
FINISH AVAILABLE : PKW

Control Type :



SONA COB SPOT LIGHT

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALSON12R	12	106	97	90	38°



RIO COB SPOTLIGHT

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALRI12R	12	85	75	52	38°



REAR VIEW

ALUMINIUM DIE-CAST MATERIAL
INDOOR RECESSED LIGHTING
BRANDED LED USED CRI>80;140LM/W
BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
BEAM ANGLE 38° AVAILABLE
CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
USED FOR FOCUSED LIGHTING
COLOR AVAILABLE : WH/WW/NWH
PROTECTION RATING: IP20
FINISH AVAILABLE : PKW

Control Type :





TOP VIEW

ALUMINIUM DIE-CAST MATERIAL
INDOOR RECESSED LIGHTING
BRANDED LED USED CRI>80;140LM/W
BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
BEAM ANGLE 45° AVAILABLE
CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
USED FOR FOCUSED LIGHTING
COLOR AVAILABLE : WH/WW/NWH
PROTECTION RATING: IP20
FINISH AVAILABLE : PKW

Control Type :



TOP COB SPOT LIGHT

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALTP9R	9	75	68	96	45°
ALTP15R	15	90	80	115	45°
ALTP20R	20	128	113	120	45°



I-BALL COB SPOT LIGHT

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALIB10R	10	65	52	86	25°
ALIB15R	15	84	71	95	38°
ALIB20R	20	100	85	120	45°



REAR VIEW

ALUMINIUM DIE-CAST MATERIAL
INDOOR RECESSED LIGHTING
BRANDED LED USED CRI>80;140LM/W
BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
USED FOR FOCUSED LIGHTING
CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
COLOR AVAILABLE : WH/WW/NWH
PROTECTION RATING: IP20
FINISH AVAILABLE : PKW

Control Type :





TOP VIEW



REAR VIEW

360° ROTATABLE

FIXTURE CAN BE PUSHED IN AND OUT

ALUMINIUM DIE-CAST MATERIAL

INDOOR RECESSED LIGHTING

BRANDED LED USED CRI>80;140LM/W

BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING

CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE

USED FOR FOCUSED LIGHTING

COLOR AVAILABLE : WH/WW/NWH

PROTECTION RATING: IP20

FINISH AVAILABLE : PKW

Control Type :



IN OUT PIPE COB SPOT LIGHT

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALIO7R	7	70	60	108	25°
ALIO12R	12	100	90	120	38°



EVON SMALL PIPE

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALEV12R	12	90	80	95	24°

10" LONG PIPE

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALEV17R	7	92	83	43+180	24°



REAR VIEW

360° ROTATABLE

ALUMINIUM DIE-CAST MATERIAL

INDOOR RECESSED LIGHTING

BRANDED LED USED CRI>80;140LM/W

BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING

CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE

USED FOR FOCUSED LIGHTING

COLOR AVAILABLE : WH/WW/NWH

PROTECTION RATING: IP20

FINISH AVAILABLE : PKW+BK : BK+GOLD

Control Type :





TOP VIEW



360° ROTATABLE

ALUMINIUM DIE-CAST MATERIAL

INDOOR RECESSED LIGHTING

BRANDED LED USED CRI>80;140LM/W

BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING

BEAM ANGLE 38° AVAILABLE

CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE

USED FOR FOCUSED LIGHTING

COLOR AVAILABLE : WH/WW/NWH

PROTECTION RATING: IP20

FINISH AVAILABLE : PKW+BK

Control Type :



NEW PIPE

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALPI12R	12 WATT	72	60	105	38°



3° BEAM COB SPOT LIGHT

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALBE3R	3	60	48	36	3°



TOP VIEW



REAR VIEW

BEAM ANGLE 3° ONLY

ALUMINIUM DIE-CAST MATERIAL

INDOOR RECESSED LIGHTING

BRANDED LED USED CRI>80;140LM/W

BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING

CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE

USED FOR FOCUSED LIGHTING

COLOR AVAILABLE : WW/NWH

PROTECTION RATING: IP20

FINISH AVAILABLE : PKW



TOP VIEW

EMPTY FIXTURES FOR MR 16 BULBS
ALUMINIUM DIE-CAST MATERIAL
INDOOR RECESSED LIGHTING
FINISH AVAILABLE : PKW/BK
MODELS AVAILABLE : ROUND/SQUARE



MR 16 C12

MODEL	SHAPE	OUTER	CUT OUT	HEIGHT
ALMRC12R	ROUND	92	84	50
ALMRC12S	SQUARE	92	84	50



MR 16 FRONT OPEN C13

MODEL	SHAPE	OUTER	CUT OUT	HEIGHT
ALMRC13R	ROUND	98	90	53




TOP VIEW

EMPTY FIXTURES FOR MR 16 BULBS
ALUMINIUM DIE-CAST MATERIAL
INDOOR RECESSED LIGHTING
FINISH AVAILABLE : PKW
MODELS AVAILABLE : ROUND




TOP VIEW

ALUMINIUM DIE-CAST MATERIAL
INDOOR SURFACE LIGHTING
BRANDED LED USED CRI>80;140LM/W
BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
BEAM ANGLE 45° AVAILABLE
CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
COLOR AVAILABLE : WH/WW/NWH
PROTECTION RATING: IP20
FINISH AVAILABLE : BK

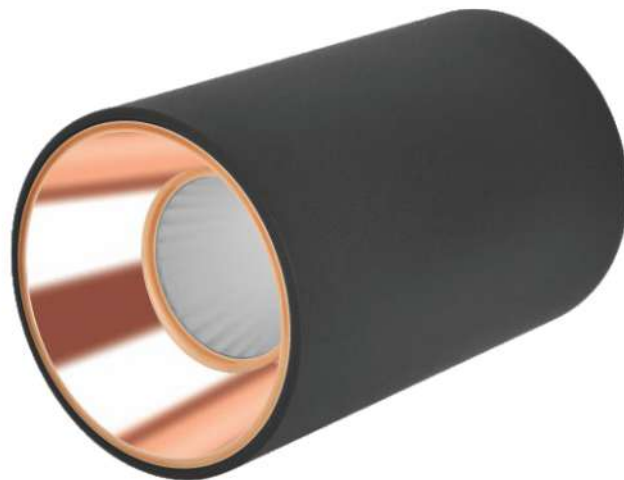

OREO RD COB SURFACE

MODEL	WATT	OUTER	HEIGHT	BEAM ANGLE
ALOZ12R	12 WATT	75	150	45°
ALOZ20R	20 WATT	96	150	45°

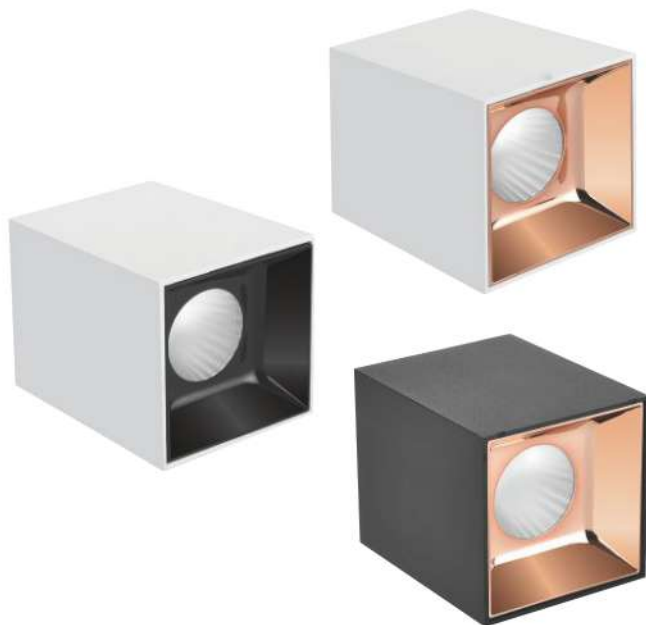

OREO SQ COB SURFACE

MODEL	WATT	OUTER	HEIGHT	BEAM ANGLE
ALOS12S	12	74	95	45°



TOP VIEW


ALUMINIUM DIE-CAST MATERIAL
INDOOR SURFACE LIGHTING
BRANDED LED USED CRI>80;140LM/W
BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
BEAM ANGLE 45° AVAILABLE
CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
COLOR AVAILABLE : WH/WW/NWH
PROTECTION RATING: IP20
FINISH AVAILABLE : PKW / BK



TOP VIEW

ALUMINIUM DIE-CAST MATERIAL
INDOOR RECESSED LIGHTING
BRANDED LED USED CRI>80;140LM/W
BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
BEAM ANGLE 38° AVAILABLE
USED FOR FOCUSED LIGHTING
CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
COLOR AVAILABLE : WH/WW/NWH
PROTECTION RATING: IP20
FINISH AVAILABLE : PKW

Control Type :



LEAK CONCIL

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
L438	15 WATT	98	88	24+47	38°



TOP VIEW

ALUMINIUM DIE-CAST MATERIAL
INDOOR SURFACE LIGHTING
BRANDED LED USED CRI>80;140LM/W
BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
BEAM ANGLE 38° AVAILABLE
CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
COLOR AVAILABLE : WH/WW/NWH
PROTECTION RATING: IP20
FINISH AVAILABLE : PKW

LEAK SURFACE

MODEL	WATT	OUTER	HEIGHT	BEAM ANGLE
L140	15	100	102	38°





TOP VIEW

ALUMINIUM DIE-CAST MATERIAL
INDOOR SURFACE LIGHTING
BRANDED LED USED CRI>80;140LM/W
BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
BEAM ANGLE 25° AVAILABLE
CONSTANT CURRENT DRIVER
COLOR AVAILABLE : WH/WW/NWH
PROTECTION RATING: IP20
FINISH AVAILABLE : PKW-BK / BK-GD

L SURFACE

MODEL	WATT	OUTER	HEIGHT	BEAM ANGLE
L 107	9	50	162	25°



ALUMINIUM MATERIAL USED
STEP DIMMABLE ALSO AVAILABLE
USED AS AESTHETIC LIGHTING
BRANDED LED USED CRI>80;140LM/W
CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
PROTECTION RATING: IP20
FINISH AVAILABLE : PKW & BK



REAR VIEW



REAR VIEW

BOX WALL LIGHT

MODEL	WATT	LENGTH	WIDTH	HEIGHT
ALBX6	6	110	80	100
ALBX12	12	190	80	100
ALBX24	24	310	80	100
ALBX30	30	460	80	100



REAR VIEW



TOP VIEW

ALUMINIUM DIE-CAST MATERIAL
INDOOR RECESSED LIGHTING
BRANDED LED USED CRI>80;140LM/W
BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
BEAM ANGLE 80° AVAILABLE
CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
COLOR AVAILABLE : WH/WW/NWH
PROTECTION RATING: IP20
FINISH AVAILABLE : PKW
3CCT TUNABLE AND DIMMABLE ALSO AVAILABLE

Control Type :



AMOR SMD DOWNLIGHT LED

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALAM12R	12	150	135	55	80°
ALAM18R	18	150	135	55	80°
ALAM24R	24	200	185	55	80°
ALAM30R	30	200	185	55	80°



REAR VIEW



AMOR COB DOWNLIGHT

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALAC18R	18	150	135	55	80°
ALAC28R	28	200	185	55	80°

ALUMINIUM DIE-CAST MATERIAL
INDOOR RECESSED LIGHTING
BRANDED LED USED CRI>80;140LM/W
BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
BEAM ANGLE 80° AVAILABLE
CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
COLOR AVAILABLE : WH/WW/NWH
FINISH AVAILABLE : PKW

Control Type :





REAR VIEW




TOP VIEW

ALUMINIUM DIE-CAST MATERIAL
INDOOR RECESSED LIGHTING
BRANDED LED USED CRI>80;140LM/W
BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
BEAM ANGLE 80° AVAILABLE
CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
COLOR AVAILABLE : WH/WW/NWH
PROTECTION RATING: IP20
FINISH AVAILABLE : PKW
3CCT TUNABLE AND DIMMABLE ALSO AVAILABLE

ORUS DOWN LIGHT - ROUND

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALOR9R	9	110	97	39	80°
ALOR16R	16	140	130	39	80°
ALOR24R	22	175	163	39	80°

Control Type :



REAR VIEW



TOP VIEW


ORUS SLIM DOWN LIGHT - SQUARE

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALOR9S	9	110	97	40	80°
ALOR16S	16	140	130	40	80°
ALOR24S	24	175	163	40	80°



ALUMINIUM DIE-CAST MATERIAL
INDOOR RECESSED LIGHTING
BRANDED LED USED CRI>80;140LM/W
BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
BEAM ANGLE 80° AVAILABLE
CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
COLOR AVAILABLE : WH/WW/NWH
PROTECTION RATING: IP20
FINISH AVAILABLE : PKW
3CCT TUNABLE AND DIMMABLE ALSO AVAILABLE

Control Type :





FOOT LIGHT - STEP

MODEL	WATT	LENGTH	WIDTH	HEIGHT
ALFL2	2	90	72	45
ALFL4	4	150	72	45

LED OUTDOOR WALL LIGHT
ALUMINIUM DIE-CAST
USED FOR OUTDOOR APPLICATION
CONSTANT CURRENT DRIVER



2 WAY OUTDOOR

MODEL	WATT	LENGTH	WIDTH	HEIGHT
2006	6	117	60	40
2006X	6	117	60	40

4 WAY OUTDOOR

MODEL	WATT	LENGTH	WIDTH	HEIGHT
2012	12	98	98	50
2012X	12	98	98	50

LED OUTDOOR WALL LIGHT
ALUMINIUM DIE-CAST
USED FOR OUTDOOR APPLICATION
CONSTANT CURRENT DRIVER



TOP VIEW



REAR VIEW



IP 65 SURFACE P30

MODEL	WATT	OUTER	HEIGHT
ALP305R	5	57	15

ALUMINIUM DIE CAST
IP65 FIXTURE
SLIM HEIGHT
USED FOR OUTDOOR APPLICATION

CURRENT	VOLTAGE	DIMMING TYPE
200 Ma	8-43 V	TRIAC
250 Ma	8-43 V	TRIAC
300 Ma	8-40 V	TRIAC
300 Ma	40-65 V	TRIAC
350 Ma	8-40 V	TRIAC
400 Ma	8-40 V	TRIAC
500 Ma	8-40 V	TRIAC
700 Ma	8-26 V	TRIAC
700 Ma	26-43 V	TRIAC
300 Ma	30-60 V	0-10V
500 Ma	12-24 V	0-10V
700 Ma	18-36 V	0-10V
300 Ma	2-42 V	DALI
200/250 300/350 Ma	9-42 V	DALI
350/400 450/500 Ma	9-42 V	DALI
550/600 650/700 Ma	9-42 V	DALI

DIMMABLE DRIVER

