




Jaquar

BATH + LIGHT

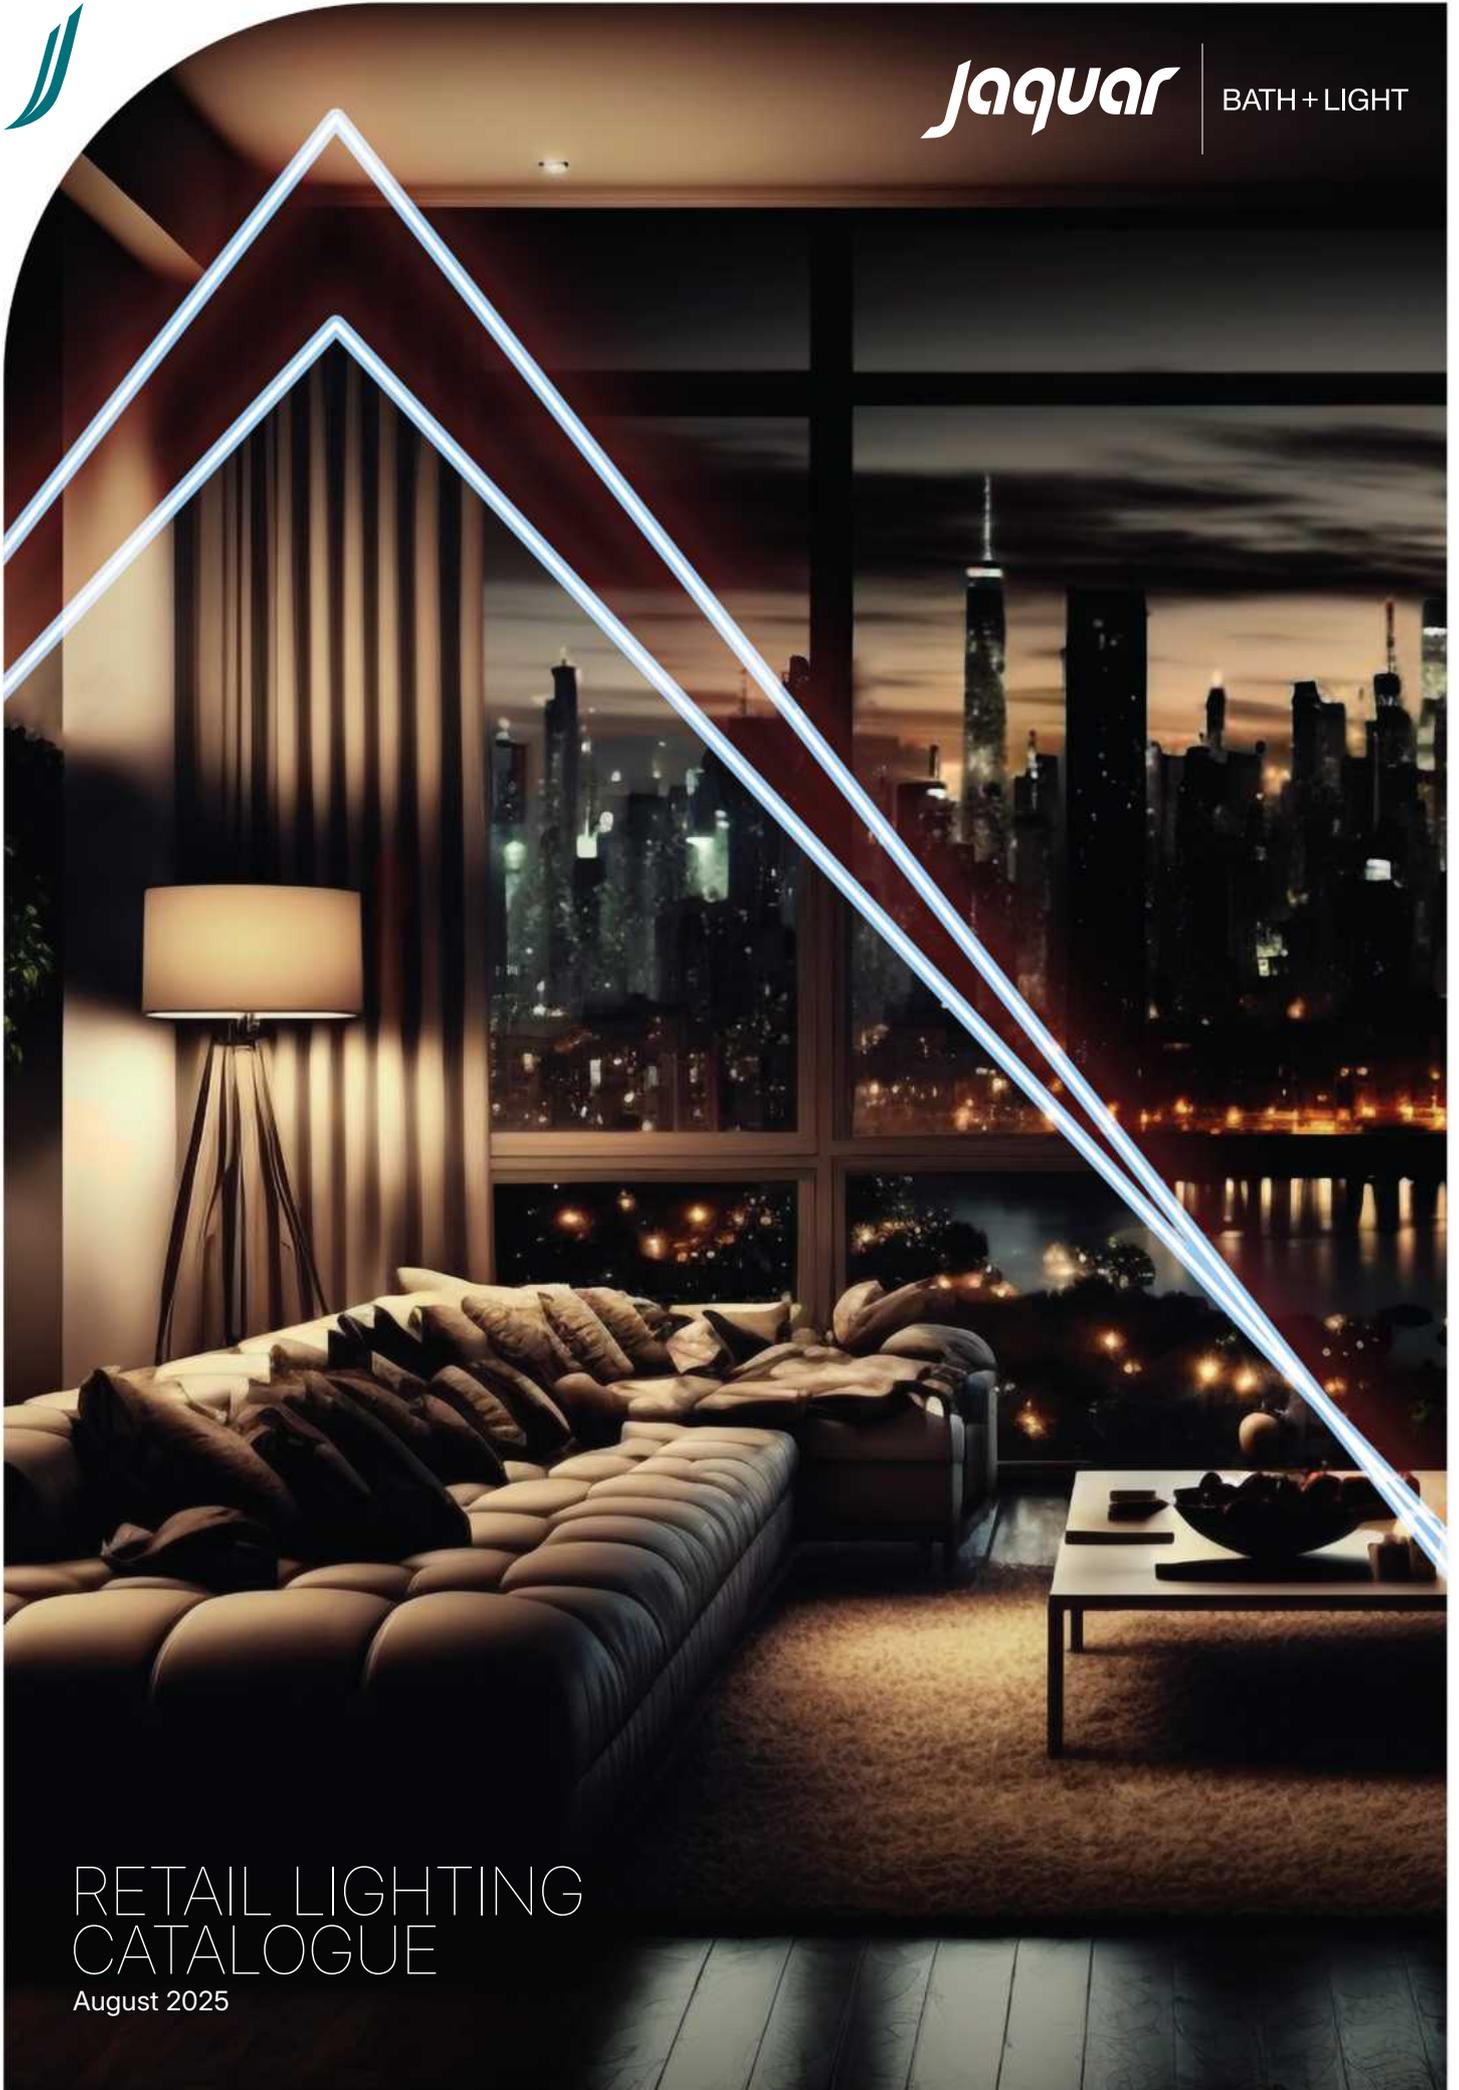

RETAIL LIGHTING CATALOGUE

August 2025

Jaquar. A group on a mission.

1972

Essco commissioned its very first, composite, ultra-modern manufacturing plant

1987

The super success of its advanced flush valve made Jaquar the highest-selling bath fittings brand, and revolutionised the Indian market

2006

Launched the shower enclosure category, offering designing-to-installation services, with standardised quality specifications

2008

Commissions 2nd state-of-the-art manufacturing facility in Rajasthan to increase faucet production capacity to 3 million annually

2010

Opens 3rd integrated manufacturing plant. Adds sanitaryware products to offer complete bathroom solutions. Production capacity scales up to 135,000 sq. m.

1960

Launch of Essco, the first pan-India bath fittings brand with an unheard of 7-year warranty

1986

Launch of the premium bath fittings brand – Jaquar. Aimed at bringing global standards to the Indian market

2001

Launch of Jaquar Orientation Centre, an immersive experience centre, for better product visualisation and education with expert advice. Enjoys pan-India presence today

2007

Opens its 1st large-scale manufacturing facility in Rajasthan with a production capacity of 2 million faucets annually, and in-house testing capabilities

2009

Launches India's first luxury bath brand – Artize

Forays into hot water solutions with a wide range of concepts and products

2013

Jaquar is recognised as India's most trusted bath fittings brand by customers in research conducted by Nielsen

Jaquar represents India as the first Indian bath brand to get showcased at ISH, Frankfurt, the global bath fair

2017

Acquires Euro Ceramic, one of Asia's most advanced sanitaryware plants, in Gujarat. Jaquar's 6th manufacturing unit with a production capacity of 2.5 million pieces annually

Opens the first Jaquar World in Dubai, a branded, global, destination showroom of complete bathroom and lighting solutions. It has presence across the globe today

2020

Adds 7th manufacturing unit, spread over almost 56,000 sq. m. Produces Jaquar's LED lighting products - from professional to consumer LED lighting, with advanced testing and certifying lab

2022

Launch of Atelier by Artize – the luxury bath gallery in Delhi, Mumbai, and Bangalore

2016

Opens Jaquar Group global HQs in Delhi NCR, a USGBC-certified net-positive building spread over 48,000 sq. m. And its 4th manufacturing unit, for wellness products


Acquires JoeyForLife, a South Korean company which becomes its 5th manufacturing unit, offering showering systems and technology

2021

Launch of 8th manufacturing unit - water heater plant with a capacity to produce half a million pieces per year and water heaters of up to 100 litres. Overall group manufacturing facilities scaled to 330,000 sq. m.

2023

The Jaquar Group is a global brand with presence in over 55 countries today. Offers complete bathroom and lighting solutions, produces over 39 million bath fittings, and capacity to produce 25 million lighting products

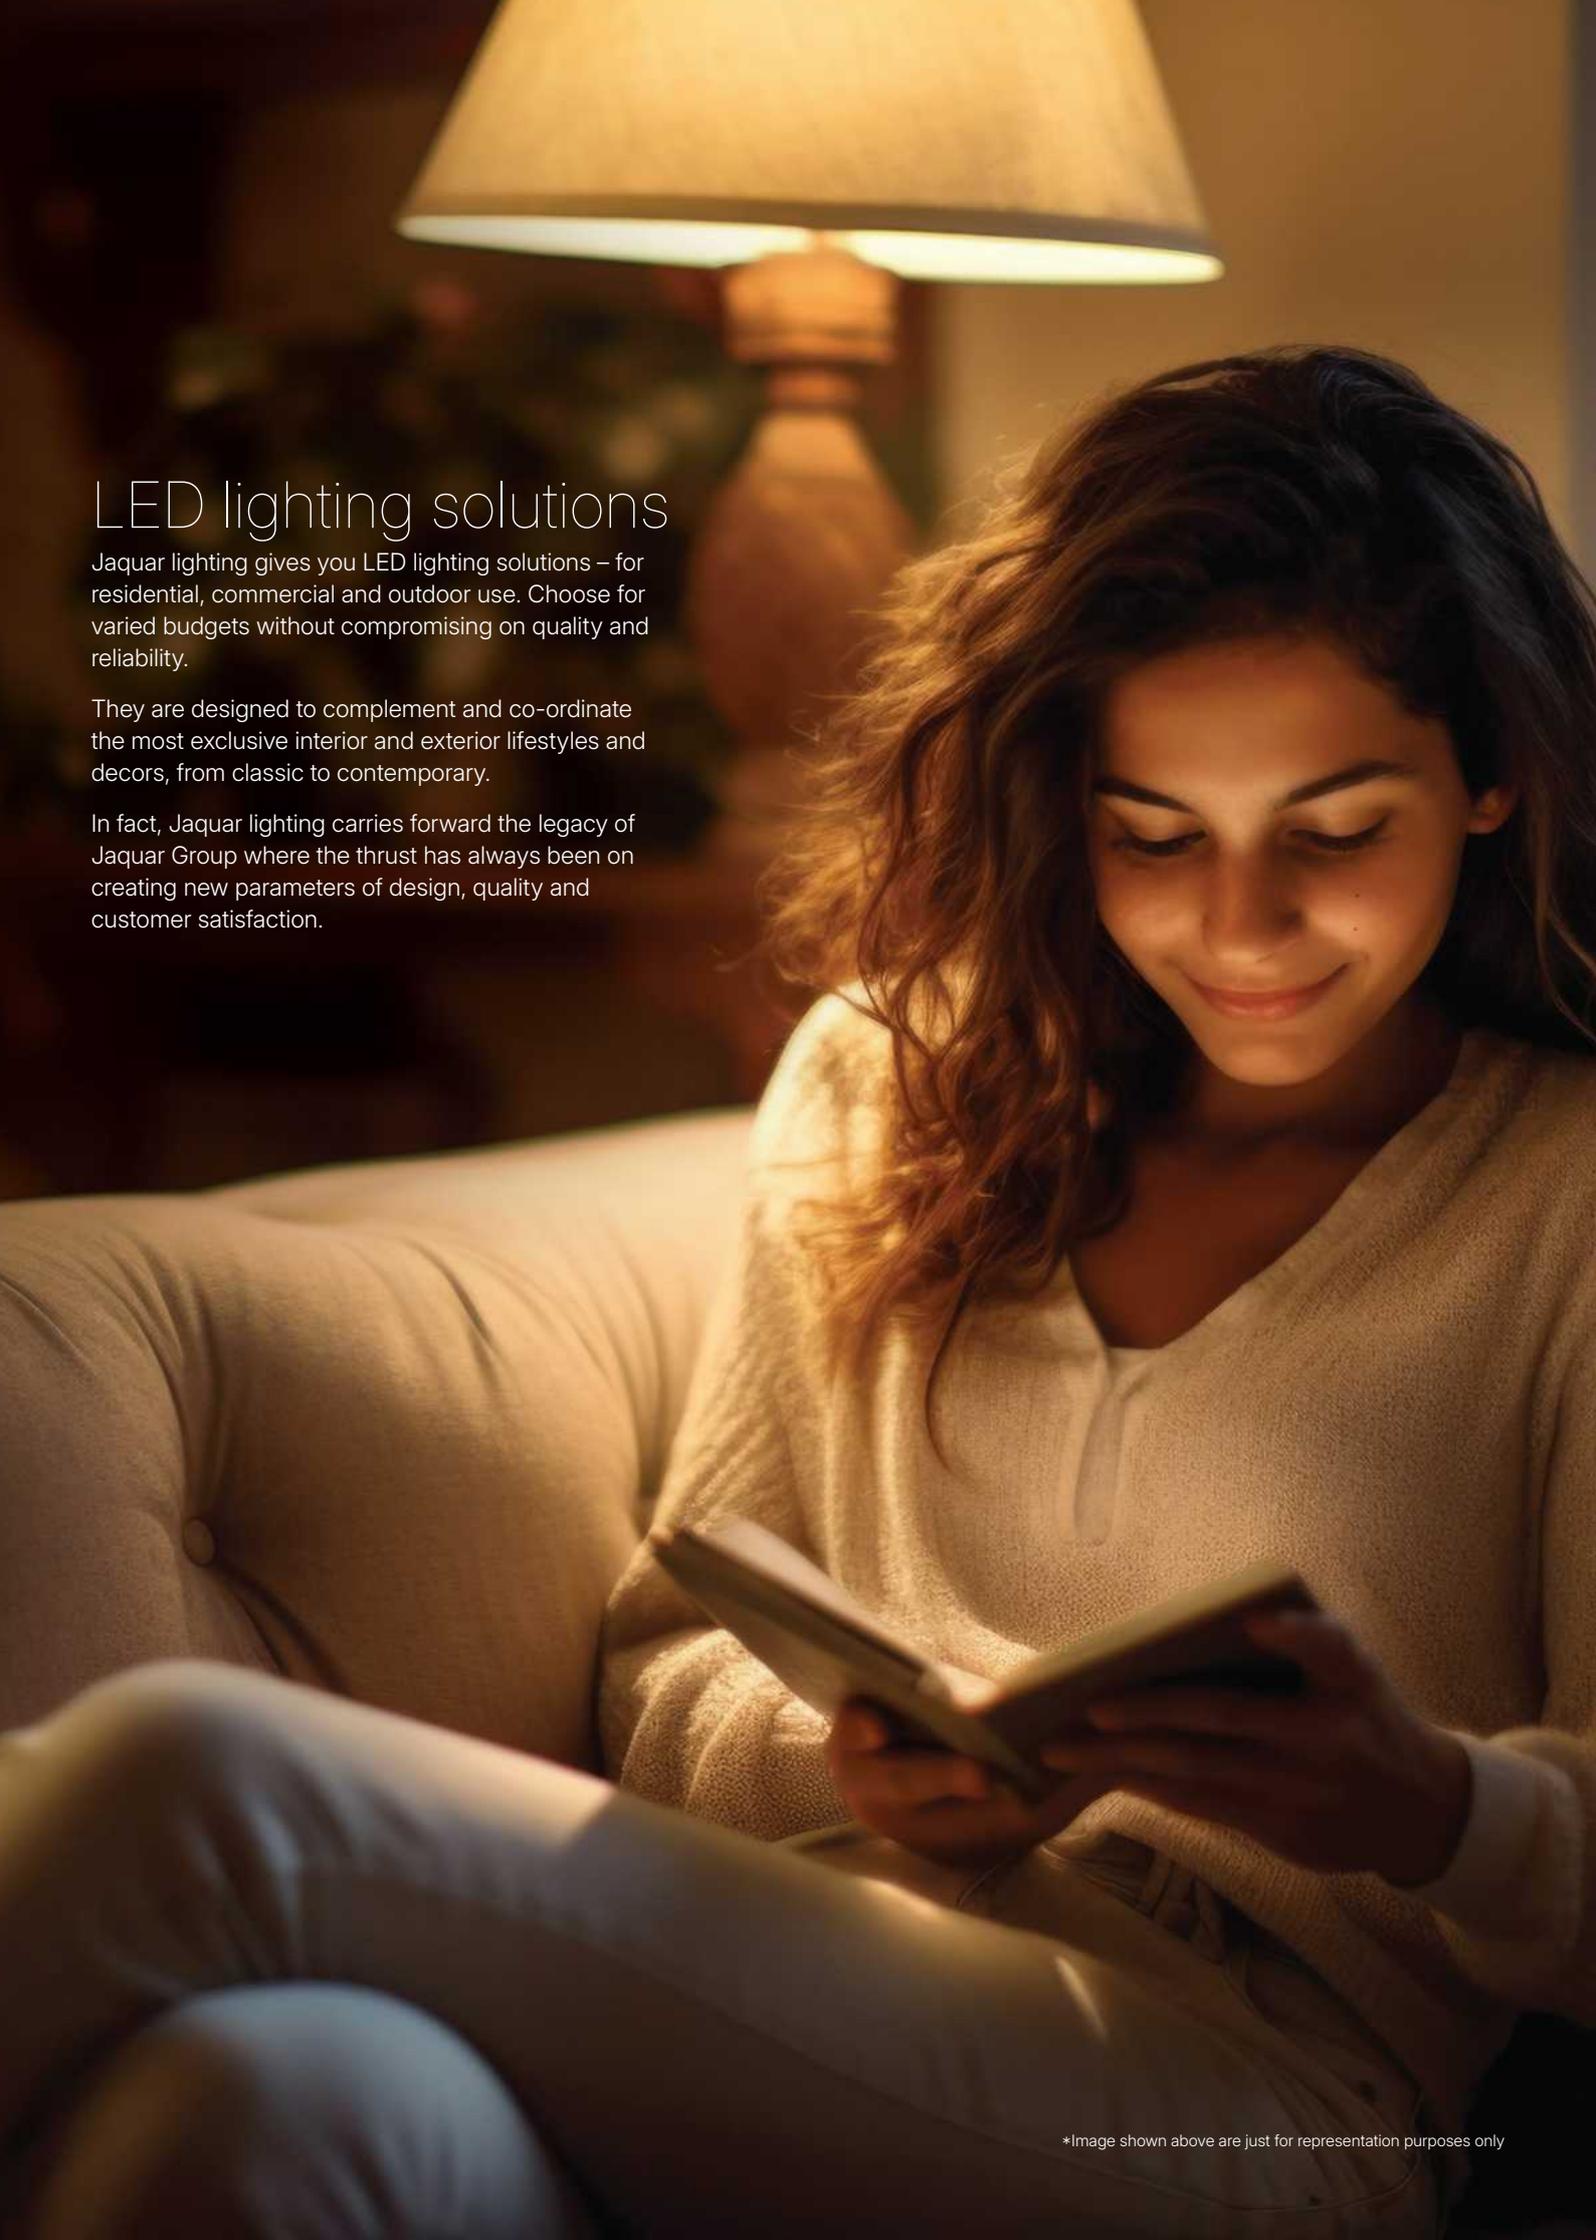A woman with long, wavy brown hair is sitting on a light-colored sofa, reading a book. She is wearing a light-colored, textured sweater. A lamp with a white shade is visible in the background, casting a warm, soft glow over the scene. The overall atmosphere is cozy and intimate.

LED lighting solutions

Jaquar lighting gives you LED lighting solutions – for residential, commercial and outdoor use. Choose for varied budgets without compromising on quality and reliability.

They are designed to complement and co-ordinate the most exclusive interior and exterior lifestyles and decors, from classic to contemporary.

In fact, Jaquar lighting carries forward the legacy of Jaquar Group where the thrust has always been on creating new parameters of design, quality and customer satisfaction.

Content



04

Indoor Luminaires

The latest options in LED lighting solutions for indoor spaces in offices, malls, and commercial areas

Outdoor Luminaires

The most comprehensive range of high-quality products for landscape and outdoor lighting



20



30

Consumer Luminaires

Cutting-edge, energy-efficient LED lighting solutions for an array of residential requirements



Indoor Luminaires


Jaquar's lighting solutions for indoor spaces include a wide range of high quality Downlights, COB Downlights, Battens and Panel lights. The choice makes it easy to find the perfect solution for every décor and lighting need.

- **Downlights**
Choose from as many as 10 different design ranges with sleek profiles, and multiple shapes and specifications.
- **COB Downlights**
Jaquar's recess-mounted COB downlights are available in 3 extensive design ranges with multiple choices of illumination power.
- **Panels**
Available in recess-mounted, surface-mounted or pendant applications, Jaquar's LED panels are first among the equals.
- **Battens and Tubes**
Jaquar offers Battens in 2 designs, a variety of outputs, and 3 different colour temperatures. Also available are a wide range of Tubes.
- **Designer Lights**
Jaquar's stunning offering in its Designer Lighting series brings state-of-the-art lighting solutions for indoor spaces.
- **Retail Lights**
Jaquar offers a complete range of recess-mounted and surface-mounted spotlights, strip lights, and accessories for innovative and attractive indoor spaces.
- **Industrial Lights**
Jaquar offers high-powered, long-lasting tube lights, bulk heads, and COB highbay lights for heavy-duty lighting requirements of industrial plants, factories and shop floors.

INDOOR | Downlights

RECESS-MOUNTED

Maintenance-free, round downlight with die cast aluminium housing and sleek backlit design suitable for low height ceiling.

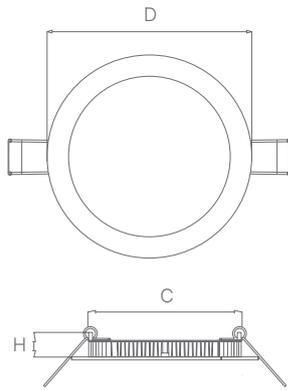

Areva Prime

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
IDL-WHT-LARP01R006XC	6	6500	75	760
IDL-WHT-LARP01R006XN	6	4000	70	760
IDL-WHT-LARP01R006XW	6	3000	65	760
IDL-WHT-LARP01R009XC	9	6500	75	870
IDL-WHT-LARP01R009XN	9	4000	70	870
IDL-WHT-LARP01R009XW	9	3000	65	870
IDL-WHT-LARP01R012XC	12	6500	100	1,050
IDL-WHT-LARP01R012XN	12	4000	95	1,050
IDL-WHT-LARP01R012XW	12	3000	90	1,050
IDL-WHT-LARP01R015XC	15	6500	90	1,150
IDL-WHT-LARP01R015XN	15	4000	85	1,150
IDL-WHT-LARP01R015XW	15	3000	80	1,150
IDL-WHT-LARP01R018XC	18	6500	90	1,470
IDL-WHT-LARP01R018XN	18	4000	85	1,470
IDL-WHT-LARP01R018XW	18	3000	80	1,470
IDL-WHT-LARP01R024XC	24	6500	90	2,100
IDL-WHT-LARP01R024XN	24	4000	85	2,100
IDL-WHT-LARP01R024XW	24	3000	80	2,100

6 W Cutout: Ø80 mm | Dimension: Ø90 × 28 mm

9 W Cutout: Ø80 mm | Dimension: Ø90 × 28 mm

12 W Cutout: Ø105 mm | Dimension: Ø120 × 28 mm


15 W Cutout: Ø105 mm | Dimension: Ø120 × 28 mm

18 W Cutout: Ø152 mm | Dimension: Ø171 × 28 mm

24 W Cutout: Ø207 mm | Dimension: Ø225 × 28 mm

SURFACE-MOUNTED

Round panel with die cast aluminium housing.

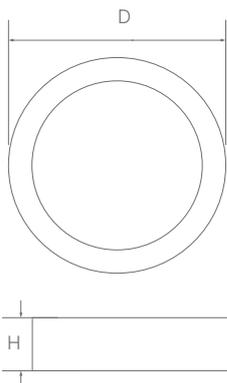

Nero Surface Round

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
IDL-WHT-LNRO02R006SC	6	6500	65	640
IDL-WHT-LNRO02R006SN	6	4000	60	640
IDL-WHT-LNRO02R006SW	6	3000	55	640
IDL-WHT-LNRO02R009SC	9	6500	80	730
IDL-WHT-LNRO02R009SN	9	4000	75	730
IDL-WHT-LNRO02R009SW	9	3000	72	730
IDL-WHT-LNRO02R012SC	12	6500	100	860
IDL-WHT-LNRO02R012SN	12	4000	95	860
IDL-WHT-LNRO02R012SW	12	3000	90	860
IDL-WHT-LNRO02R015SC	15	6500	80	980
IDL-WHT-LNRO02R015SN	15	4000	75	980
IDL-WHT-LNRO02R015SW	15	3000	72	980
IDL-WHT-LNRO02R018SC	18	6500	100	1,220
IDL-WHT-LNRO02R018SN	18	4000	95	1,220
IDL-WHT-LNRO02R018SW	18	3000	90	1,220
IDL-WHT-LNRO02R024SC	24	6500	100	1,920
IDL-WHT-LNRO02R024SN	24	4000	95	1,920
IDL-WHT-LNRO02R024SW	24	3000	90	1,920

6 W Dimension: Ø125 × 35 mm

9 W Dimension: Ø125 × 35 mm

12 W Dimension: Ø175 × 35 mm

15 W Dimension: Ø175 × 35 mm


18 W Dimension: Ø225 × 35 mm

24 W Dimension: Ø300 × 35 mm

INDOOR | Downlight

SURFACE-MOUNTED

Square panel with die cast aluminium housing.

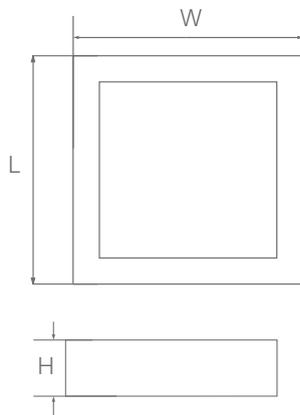

Nero Surface Square

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
IDL-WHT-LNRO02S006SC	6	6500	65	640
IDL-WHT-LNRO02S006SN	6	4000	60	640
IDL-WHT-LNRO02S006SW	6	3000	55	640
IDL-WHT-LNRO02S012SC	12	6500	75	860
IDL-WHT-LNRO02S012SN	12	4000	70	860
IDL-WHT-LNRO02S012SW	12	3000	65	860
IDL-WHT-LNRO02S018SC	18	6500	75	1,220
IDL-WHT-LNRO02S018SN	18	4000	70	1,220
IDL-WHT-LNRO02S018SW	18	3000	70	1,220
IDL-WHT-LNRO02S024SC	24	6500	90	1,920
IDL-WHT-LNRO02S024SN	24	4000	85	1,920
IDL-WHT-LNRO02S024SW	24	3000	80	1,920

6 W Dimension: 125 × 125 × 35 mm

12 W Dimension: 175 × 175 × 35 mm

18 W Dimension: 225 × 225 × 35 mm

24 W Dimension: 300 × 300 × 35 mm

INDOOR | COB Downlights

RECESS-MOUNTED

COB-based, round, tiltable downlight with die cast aluminium housing and 22°,30° beam angle.



Dimas

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
ICO-WHT-LDMA01R007XC	7	6500	60	1050
ICO-WHT-LDMA01R007XN	7	4000	57	1050
ICO-WHT-LDMA01R007XW	7	3000	54	1050
ICO-WHT-LDMA01R012XC	12	6500	60	1,220
ICO-WHT-LDMA01R012XN	12	4000	57	1,220
ICO-WHT-LDMA01R012XW	12	3000	55	1,220

7 W Cutout: Ø50 mm | Dimension: Ø64 × 60 mm

12 W Cutout: Ø60 mm | Dimension: Ø75 × 70 mm

*THD <20% for 7W | <15% for 12W, *CRI >90

*Also available in black housing

RECESS-MOUNTED

COB-based, round, tiltable downlight with die cast aluminium housing and 22°,70° beam angle.



Glide

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
ICO-WHT-LGLD01R007PC	7	6500	65	1,600
ICO-WHT-LGLD01R007PN	7	4000	62	1,600
ICO-WHT-LGLD01R007PW	7	3000	59	1,600
ICO-WHT-LGLD01R012PC	12	6500	50	1,825
ICO-WHT-LGLD01R012PN	12	4000	48	1,825
ICO-WHT-LGLD01R012PW	12	3000	45	1,825

7 W Cutout: Ø68 mm | Dimension: Ø72 × 70 mm

12 W Cutout: Ø75 mm | Dimension: Ø85 × 80 mm

*THD <20% for 7W | <15% for 12W, *CRI >90

*Also available in black housing

RECESS-MOUNTED

COB-based, round, tiltable downlight with die cast aluminium housing and 36° beam angle.



Estus Slim Swivel

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
ICO-WHT-LETSLJMR03XC	3	6500	75	800
ICO-WHT-LETSLJMR03XN	3	4000	72	800
ICO-WHT-LETSLJMR03XW	3	3000	70	800
ICO-WHT-LETSLJMR06XC	6	6500	85	950
ICO-WHT-LETSLJMR06XN	6	4000	80	950
ICO-WHT-LETSLJMR06XW	6	3000	77	950
ICO-WHT-LETSLJMR09XC	9	6500	85	1,200
ICO-WHT-LETSLJMR09XN	9	4000	80	1,200
ICO-WHT-LETSLJMR09XW	9	3000	77	1,200

3 W Cutout: Ø54 mm | Dimension: Ø65 × 25mm


6 W Cutout: Ø74 mm | Dimension: Ø85 × 25 mm

9 W Cutout: Ø90 mm | Dimension: Ø27 × 90 mm

INDOOR | COB Downlights

RECESS-MOUNTED

COB-based, round, tiltable downlight with die cast aluminium housing and 36° beam angle.

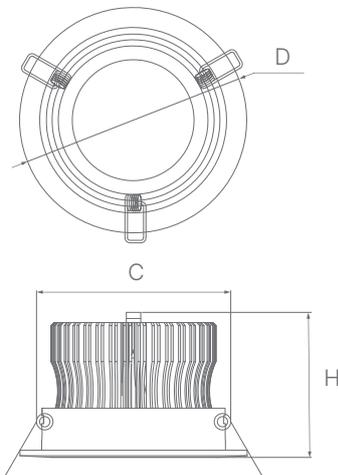

Estus Swivel Round

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
ICO-WHT-LETS36R003XC	3	6500	80	610
ICO-WHT-LETS36R003XN	3	4000	75	610
ICO-WHT-LETS36R003XW	3	3000	70	610
ICO-WHT-LETS36R006XC	6	6500	95	830
ICO-WHT-LETS36R006XN	6	4000	90	830
ICO-WHT-LETS36R006XW	6	3000	85	830
ICO-WHT-LETS36R009XC	9	6500	90	970
ICO-WHT-LETS36R009XN	9	4000	85	970
ICO-WHT-LETS36R009XW	9	3000	80	970
ICO-WHT-LETS36R012XC	12	6500	95	1,180
ICO-WHT-LETS36R012XN	12	4000	90	1,180
ICO-WHT-LETS36R012XW	12	3000	85	1,180
ICO-WHT-LETS36R015XC	15	6500	95	1,250
ICO-WHT-LETS36R015XN	15	4000	90	1,250
ICO-WHT-LETS36R015XW	15	3000	85	1,250
ICO-WHT-LETS36R018XC	18	6500	95	1,625
ICO-WHT-LETS36R018XN	18	4000	90	1,625
ICO-WHT-LETS36R018XW	18	3000	85	1,625
ICO-WHT-LETS36R024XC	24	6500	100	1,925
ICO-WHT-LETS36R024XN	24	4000	95	1,925
ICO-WHT-LETS36R024XW	24	3000	90	1,925
ICO-WHT-LETS36R030XC	30	6500	100	2,200
ICO-WHT-LETS36R030XN	30	4000	95	2,200
ICO-WHT-LETS36R030XW	30	3000	90	2,200

3 W Cutout: Ø58 mm | Dimension: Ø70 × 50 mm

6 W Cutout: Ø74 mm | Dimension: Ø84 × 65 mm

9 W Cutout: Ø74 mm | Dimension: Ø84 × 65 mm

12 W Cutout: Ø95 mm | Dimension: Ø110 × 85 mm


15 W Cutout: Ø95 mm | Dimension: Ø110 × 85 mm

18 W Cutout: Ø118 mm | Dimension: Ø138 × 85 mm

24 W Cutout: Ø118 mm | Dimension: Ø138 × 85 mm

30 W Cutout: Ø118 mm | Dimension: Ø138 × 100 mm

Deep recess-mounted, COB-based, round, fixed downlight with die cast aluminium housing and 24° beam angle.

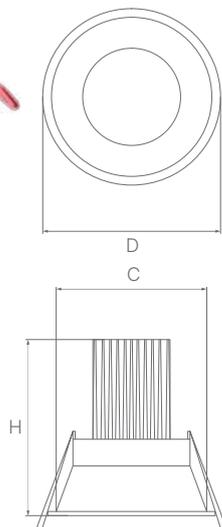

Eris (Low border deep-recessed)

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
ICO-WHT-LERS02R005XC	5	6500	75	850
ICO-WHT-LERS02R005XN	5	4000	70	850
ICO-WHT-LERS02R005XW	5	3000	65	850
ICO-WHT-LERS02R010XC	10	6500	90	1,280
ICO-WHT-LERS02R010XN	10	4000	85	1,280
ICO-WHT-LERS02R010XW	10	3000	80	1,280
ICO-WHT-LERS02R015XC	15	6500	105	1,480
ICO-WHT-LERS02R015XN	15	4000	100	1,480
ICO-WHT-LERS02R015XW	15	3000	95	1,480
ICO-WHT-LERS02R020XC	20	6500	100	2,200
ICO-WHT-LERS02R020XN	20	4000	99	2,200
ICO-WHT-LERS02R020XW	20	3000	88	2,200

5 W Cutout: Ø47 mm | Height: 100 mm

10 W Cutout: Ø69 mm | Height: 110 mm

15 W Cutout: Ø80 mm | Height: 120 mm

20 W Cutout: Ø115 mm | Height: 130 mm

*THD <10%, *CRI >90

*Also available in black housing in 10 & 15 W

*2/3/5 year warranty applicable on all lighting products

INDOOR | COB Downlights

Deep recess-mounted, COB-based swivel downlight with 38° beam angle.



Eris Swivel Round

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
ICO-WHT-LERS03R007XC	7	6500	80	1,050
ICO-WHT-LERS03R007XN	7	4000	75	1,050
ICO-WHT-LERS03R007XW	7	3000	70	1,050
ICO-WHT-LERS03R012XC	12	6500	80	1,240
ICO-WHT-LERS03R012XN	12	4000	75	1,240
ICO-WHT-LERS03R012XW	12	3000	70	1,240
ICO-WHT-LERS03R020XC	20	6500	105	2,000
ICO-WHT-LERS03R020XN	20	4000	100	2,000
ICO-WHT-LERS03R020XW	20	3000	95	2,000
ICO-WHT-LERS03R030XC	30	6500	95	2,600
ICO-WHT-LERS03R030XN	30	4000	90	2,600
ICO-WHT-LERS03R030XW	30	3000	85	2,600

7 W Cutout: Ø78 mm | Height: 73 mm

12 W Cutout: Ø92 mm | Height: 90 mm

20 W Cutout: Ø117 mm | Height: 90 mm


30 W Cutout: Ø148 mm | Height: 98 mm

*THD <10%, *CRI >90

*Also available in black housing

INDOOR | Retail Lights

Recess-mounted zoom light with powder coated die cast aluminium housing and anodized aluminium reflector. 38° beam angle.

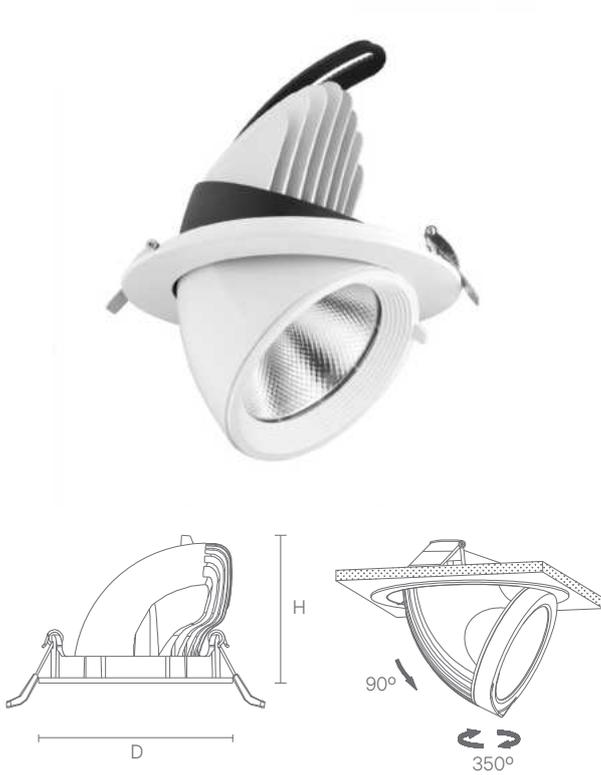

Zoom Light

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
IRL-WHT-LZOM01R015XC	15	6500	85	1,825
IRL-WHT-LZOM01R015XN	15	4000	80	1,825
IRL-WHT-LZOM01R015XW	15	3000	75	1,825
IRL-WHT-LZOM01R025XC	25	6500	85	3,500
IRL-WHT-LZOM01R025XN	25	4000	80	3,500
IRL-WHT-LZOM01R025XW	25	3000	75	3,500

15 W Cutout: Ø85 mm | Height: 72 mm

25 W Cutout: Ø140 mm | Height: 121 mm

CRI >90

*THD <10%

RECESS-MOUNTED

COB based multiple zoom light with die cast aluminium housing, anodized reflector and tempered transparent glass diffuser. 40° beam angle.




Multiple Zoom Light

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
IRL-WHT-LZOMMLS215XC	2×15	6500	85	4,950
IRL-WHT-LZOMMLS215XN	2×15	4000	80	4,950
IRL-WHT-LZOMMLS215XW	2×15	3000	75	4,950

2 × 15 W Length: 223 mm | Width: 115 mm | Height: 81 mm

Track-mounted round focus light with moveable base. Fully adjustable with aluminium housing (including driver casing). 36° beam angle.

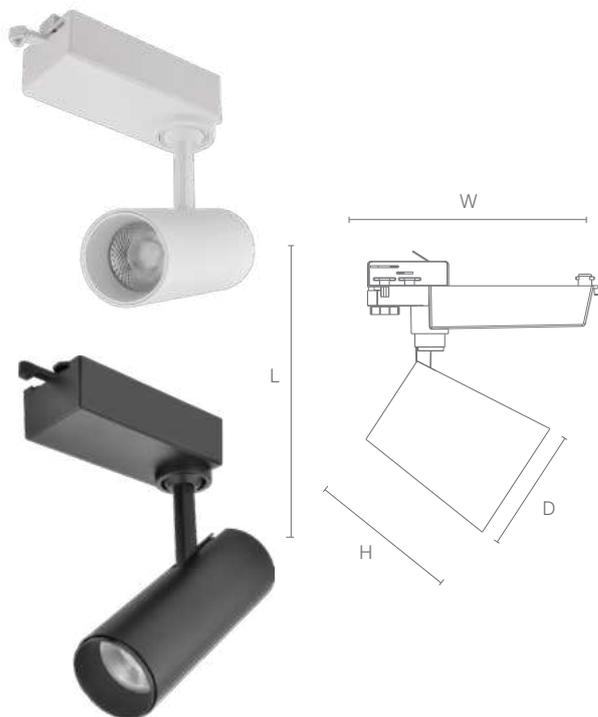

Slim Track Light

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
IRL-WHT-LTRL1SL010XC	10	6500	65	950
IRL-WHT-LTRL1SL010XN	10	4000	60	950
IRL-WHT-LTRL1SL010XW	10	3000	55	950
IRL-WHT-LTRL1SL020XC	20	6500	85	2,200
IRL-WHT-LTRL1SL020XN	20	4000	80	2,200
IRL-WHT-LTRL1SL020XW	20	3000	75	2,200
IRL-BLK-LTRL1SL010XC	10	6500	65	950
IRL-BLK-LTRL1SL010XN	10	4000	60	950
IRL-BLK-LTRL1SL010XW	10	3000	55	950
IRL-BLK-LTRL1SL020XC	20	6500	85	2,200
IRL-BLK-LTRL1SL020XN	20	4000	80	2,200
IRL-BLK-LTRL1SL020XW	20	3000	75	2,200

10 W Length: 146 mm | Width: 110 mm | Height: 126 mm
20 W Length: 170 mm | Width: 100 mm | Height: 180 mm

Accessories for Track Light

2 Line Track

Item Code	Length	Colour	MRP
ACI-WHT-LTRK2L1MTRBL	1 Meter	Black	795
ACI-WHT-LTRK2L1MTRWH	1 Meter	White	795
ACI-WHT-LTRK2L2MTRBL	2 Meter	Black	1,740
ACI-WHT-LTRK2L2MTRWH	2 Meter	White	1,740


2 Line Track Connector

Item Code	Shape	Colour	MRP
ACI-WHT-LTRCBL2LISHP	I	Black	210
ACI-WHT-LTRCBL2LLSHP	L	Black	245
ACI-WHT-LTRCBL2LTSHP	T	Black	335
ACI-WHT-LTRCWH2LISHP	I	White	210

INDOOR | Retail Lights

SURFACE MOUNTED

Surface mounted focus light with die cast aluminium housing.

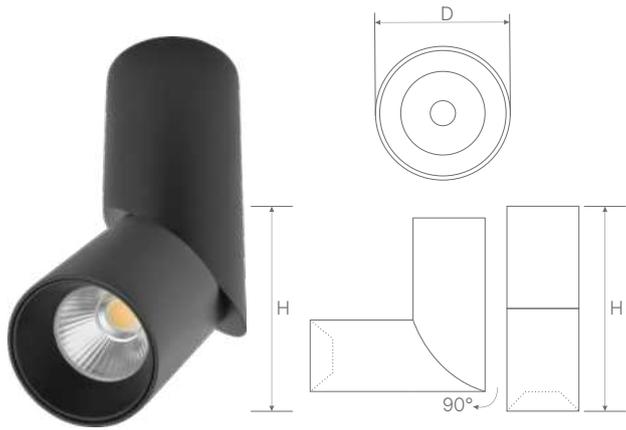


Cyno

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
IRL-BLK-LCYN01R010SC	10	6500	80	2,000
IRL-BLK-LCYN01R010SN	10	4000	75	2,000
IRL-BLK-LCYN01R010SW	10	3000	70	2,000

10 W Dia: Ø50 mm | Height: 176 mm

DEEP RECESSED

Extended COB focus light with die cast aluminium housing.

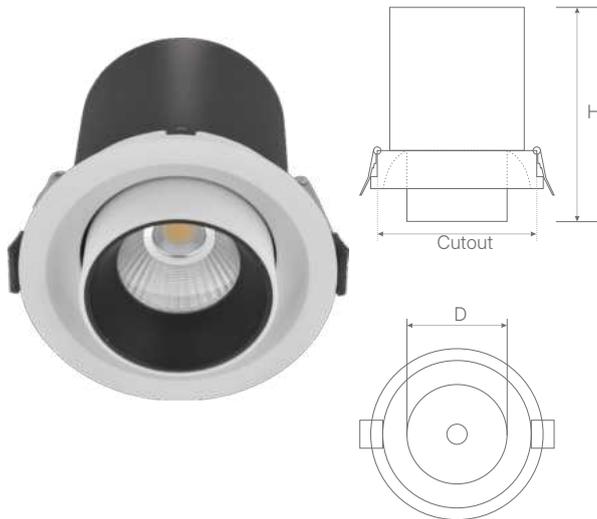

Empha

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
IRL-WHT-LEMP01R007XC	7	6500	80	2,050
IRL-WHT-LEMP01R007XN	7	4000	75	2,050
IRL-WHT-LEMP01R007XW	7	3000	70	2,050
IRL-WHT-LEMP01R015XC	15	6500	80	2,250
IRL-WHT-LEMP01R015XN	15	4000	75	2,250
IRL-WHT-LEMP01R015XW	15	3000	70	2,250

7 W Cutout: Ø62 mm | Dia: Ø72 mm | Height: 98 mm

15 W Cutout: Ø90 mm | Dia: Ø103 mm | Height: 99 mm

DEEP RECESSED

Downlight with die cast aluminium housing.



Emina

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
IRL-WHT-LEMA01R008XC	8	6500	80	1,330
IRL-WHT-LEMA01R008XN	8	4000	75	1,330
IRL-WHT-LEMA01R008XW	8	3000	70	1,330
IRL-WHT-LEMA01R015XC	15	6500	80	1,700
IRL-WHT-LEMA01R015XN	15	4000	75	1,700
IRL-WHT-LEMA01R015XW	15	3000	70	1,700

8 W Cutout: Ø55 mm | Dia: Ø65 mm | Height: 65 mm

15 W Cutout: Ø75 mm | Dia: Ø85 mm | Height: 80 mm

**CRI >90, THD <10% | *Also available in black housing

INDOOR | Retail Lights

DEEP RECESSED

Downlight with die cast aluminium housing.



Emina Emergency

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
HEL-WHT-LEMAEMR015XC	15	6500	65	1,775
HEL-WHT-LEMAEMR015XN	15	4000	60	1,775
HEL-WHT-LEMAEMR015XW	15	3000	55	1,775

15 W Cutout: Ø90 mm | Dia: Ø98 mm | Height: 80 mm

**CRI >90, THD <10%

Battery: Li-ION battery, Battery capacity: 2200 mAh

Charging time: 12 hours, Back up Time: 2 Hours, Overcharge protection: Yes

DEEP RECESSED

Downlight with die cast aluminium housing.



Emina Tilttable

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
IRL-WHT-LEMAT1R008XC	8	6500	80	1,725
IRL-WHT-LEMAT1R008XN	8	4000	75	1,725
IRL-WHT-LEMAT1R008XW	8	3000	70	1,725
IRL-WHT-LEMAT1R015XC	15	6500	80	2,250
IRL-WHT-LEMAT1R015XN	15	4000	75	2,250
IRL-WHT-LEMAT1R015XW	15	3000	70	2,250


8 W Cutout: Ø68 mm | Dia: Ø78 mm | Height: 65 mm

15 W Cutout: Ø90 mm | Dia: Ø98 mm | Height: 80 mm

**CRI >90, THD <10%

RECESS-MOUNTED

COB based tiltable linear spot light with die cast aluminium housing and 30° beam angle.

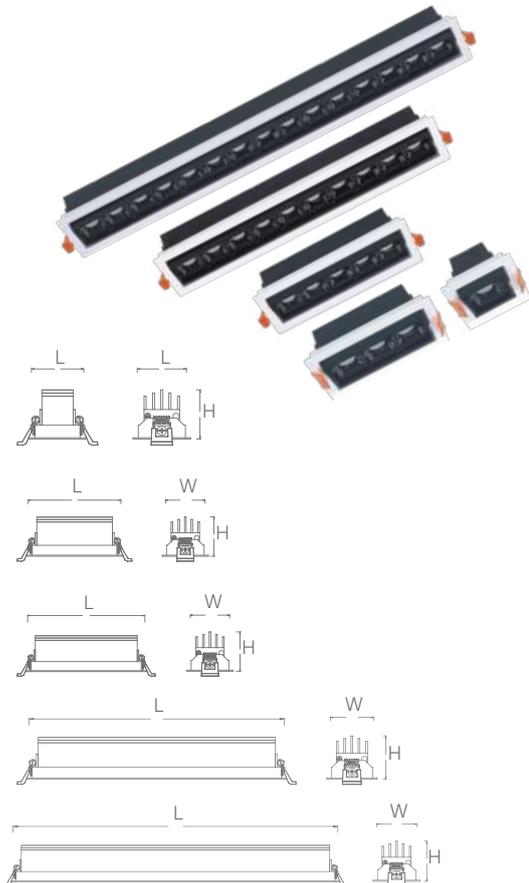

Rene

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
IRL-WHT-LRNE01S002XC	2	6500	70	740
IRL-WHT-LRNE01S002XN	2	4000	65	740
IRL-WHT-LRNE01S002XW	2	3000	60	740
IRL-WHT-LRNE01S006XC	6	6500	100	1,140
IRL-WHT-LRNE01S006XN	6	4000	95	1,140
IRL-WHT-LRNE01S006XW	6	3000	90	1,140
IRL-WHT-LRNE01S010XC	10	6500	100	1,650
IRL-WHT-LRNE01S010XN	10	4000	95	1,650
IRL-WHT-LRNE01S010XW	10	3000	90	1,650
IRL-WHT-LRNE01S020XC	20	6500	100	2,800
IRL-WHT-LRNE01S020XN	20	4000	95	2,800
IRL-WHT-LRNE01S020XW	20	3000	90	2,800
IRL-WHT-LRNE01S030XC	30	6500	100	3,650
IRL-WHT-LRNE01S030XN	30	4000	95	3,650
IRL-WHT-LRNE01S030XW	30	3000	90	3,650

2 W Cutout: Ø50 x 47 mm | Length: 55 mm | Width: 55 mm | Height: 47mm

6 W Cutout: Ø111 x 47 mm | Length: 116 mm | Width: 55 mm | Height: 47 mm

10 W Cutout: Ø153 x 47 mm | Length: 158 mm | Width: 55 mm | Height: 47 mm

20 W Cutout: Ø286 x 47 mm | Length: 290 mm | Width: 55 mm | Height: 47 mm

30 W Cutout: Ø419 x 47 mm | Length: 423 mm | Width: 55 mm | Height: 47 mm

*Also available in black housing

*2/3/5 year warranty applicable on all lighting products

INDOOR | Retail Lights

This strip light is suitable for indoor applications with different colours and wattages. Standard 5.0 meter roll.



IP20 Strip Light (24 V DC)

Item Code	Wattage (W)	CCT (K)	MRP
STI-WHT-LSTP03X005XC	25	6000	790
STI-WHT-LSTP03X005XN	25	4000	790
STI-WHT-LSTP03X005XW	25	3000	790
STI-WHT-LSTP03X008XC	40	6000	1,240
STI-WHT-LSTP03X008XW	40	3000	1,240
STI-WHT-LSTP03X015XC	75	6000	1,480
STI-WHT-LSTP03X015XW	75	3000	1,480
STI-WHT-LSTP03X018XC	90	6500	2,250
STI-WHT-LSTP03X018XN	90	4000	2,250
STI-WHT-LSTP03X018XW	90	3000	2,250


25 W Width: 8 mm | Height: 2.5 mm

40 W Width: 8 mm | Height: 2.5 mm

75 W Width: 8 mm | Height: 2.5 mm

90 W Width: 8 mm | Height: 2.5 mm

This strip light is suitable for outdoor applications with different colours and wattages. Standard 5.0 meter roll.

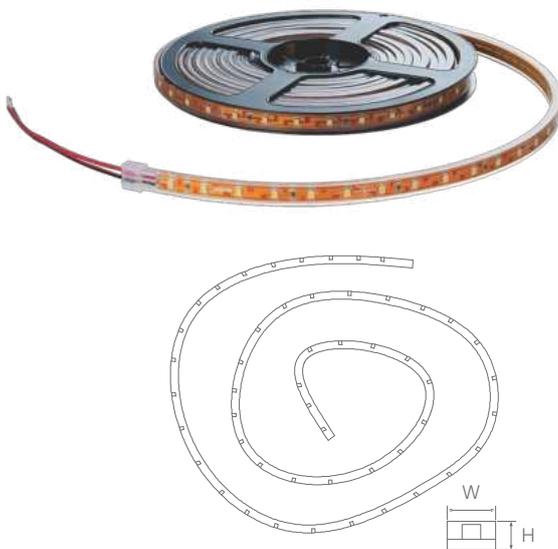



IP65 Strip Light (24 V DC)

Item Code	Wattage (W)	CCT (K)	MRP
STI-WHT-LSTP04X005XC	25	6000	1,340
STI-WHT-LSTP04X005XW	25	3000	1,340
STI-WHT-LSTP04X008XC	40	6000	1,825
STI-WHT-LSTP04X008XW	40	3000	1,825
STI-WHT-LSTP04X015XC	75	6000	2,075
STI-WHT-LSTP04X015XW	75	3000	2,075

25 W Width: 10 mm | Height: 4.5 mm

40 W Width: 10 mm | Height: 4.5 mm

75 W Width: 10 mm | Height: 4.5 mm

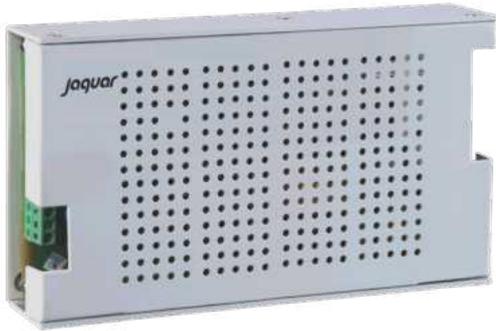



Power Supply for Indoor Strip Light (IP20)

Item Code	Wattage (W)	MRP
ZCI-WHT-LDRV01S030XX	30	550
ZCI-WHT-LDRV01S048XX	48	890
ZCI-WHT-LDRV01S060XX	60	1,060

Power Supply for Slim Indoor Strip Light (IP20 rated)



Item Code	Wattage (W)	MRP
ZCI-WHT-LDRVSL01S048	48	1,250
ZCI-WHT-LDRVSL01S060	60	1,250
ZCI-WHT-LDRVSL01S072	72	1,325
ZCI-WHT-LDRVSL01S096	96	1,350



Power Supply for Outdoor Strip Light (IP65 rated)

Item Code	Wattage (W)	MRP
ZCI-WHT-LDRV02S030XX	30	1,090
ZCI-WHT-LDRV02S048XX	48	1,460
ZCI-WHT-LDRV02S060XX	60	1,950
ZCI-WHT-LDRV02S072XX	72	2,175
ZCI-WHT-LDRV02S096XX	96	2,775

INDOOR | Panels

RECESS-MOUNTED

1'x1' panel with white powder coated CRCA housing and full mounted acrylic diffuser.



Ultima Slim (1'x1')

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
IPN-WHT-LULTSLS018XC	18	6500	100	1,180
IPN-WHT-LULTSLS018XN	18	4000	95	1,180
IPN-WHT-LULTSLS018XW	18	3000	90	1,180

With Clip

IPN-WHT-LULTSLS18CLC	18	6500	100	1,270
IPN-WHT-LULTSLS18CLN	18	4000	95	1,270
IPN-WHT-LULTSLS18CLW	18	3000	90	1,270

18 W Length: 294 mm | Width: 294 mm | Height: 35 mm | Beam angle: 120°
THD <15%, CRI >80,

RECESS-MOUNTED

1'x4' panel with white powder coated CRCA housing and full mounted acrylic diffuser.



Ultima Ultra Slim (1'x4')

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
IPN-WHT-LULU4SL033XC	33	6500	120	2,950
IPN-WHT-LULU4SL033XN	33	4000	115	2,950
IPN-WHT-LULU4SL033XW	33	3000	105	2,950

With Clip

IPN-WHT-LULU4SL33CLC	33	6500	120	3,050
IPN-WHT-LULU4SL33CLN	33	4000	115	3,050
IPN-WHT-LULU4SL33CLW	33	3000	105	3,050

33 W Length:1200 | Width: 300 mm | Height: 35 mm

RECESS-MOUNTED

Ultima slim panel with white powder coated CRCA housing and full mounted acrylic diffuser.



Ultima Slim

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
IPN-WHT-LULTSLS036XC	36	6500	110	1,775
IPN-WHT-LULTSLS036XN	36	4000	105	1,775
IPN-WHT-LULTSLS036XW	36	3000	100	1,775
IPN-WHT-LULTSLSN36XC*	36	6500	110	2,325

*Motion Sensor

With Clip

IPN-WHT-LULTSLS36CLC	36	6500	110	1,900
IPN-WHT-LULTSLS36CLN	36	4000	105	1,900
IPN-WHT-LULTSLS36CLW	36	3000	100	1,900

Accessories for Ultima Slim

ITEM CODE	Description	MRP
ZCI-WHT-L2X2SLCLIPXX	Recess-mount clip for Ultima Slim 2x2 and 1x4 panel	90
API-WHT-HANGWIREYSHP	Y Shape Wiring System for Hanging	595
API-WHT-LTMPULTSL36S	Ultima Slim Template for Surface Mount	870

INDOOR | Panels

RECESS-MOUNTED

High efficacy, recess-mounted panel with white powder coated CRCA housing and full mounted acrylic diffuser (2'x2'), 140 Lm / W for 36 W



Ultima Ultra Pro (2'x2')

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
IPN-WHT-LULPU2SL36XC	36	6500	140	2,275

36 W Length: 595 mm | Width: 595 mm | Height: 35 mm

RECESS-MOUNTED

Multi-colour changeable recess-mounted panel with white powder coated CRCA housing and full mounted acrylic diffuser (2'x2').



Ultima Multi-colour (2'x2')

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
IPN-WHT-LULTSLA032XM	32	6500/4000/3000	100	6,100
ACI-BLK-ULTSLAREMOTE*	-	-	-	1,140

32 W Length: 595 mm | Width: 595 mm | Height: 35 mm

THD <10%, CRI >80

Colour changes through switching

*Remote

INDOOR | Industrial Lights

Corrosion and impact resistant batten with polycarbonate housing. Dust and water-proof.




Pride (Weather-proof IP65 rated)

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
IIL-WHT-LPRD01X020XC	20	6000	100	1,875
IIL-WHT-LPRD01X020XW	20	3000	90	1,875
IIL-WHT-LPRD01X040XC	40	6000	100	2,575
IIL-WHT-LPRD01X040XW	40	3000	90	2,575

20 W Length: 590 mm | Width: 86 mm | Height: 67 mm

40 W Length: 1180 mm | Width: 86 mm | Height: 67 mm

Bulk head with pressure die cast aluminium housing and acrylic diffuser (IP65 protection).

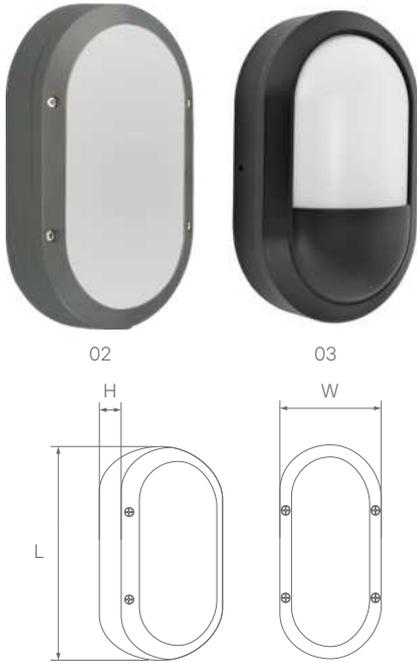

Bulk Head

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
ILO-BLK-LBLK02X010XC	10	6500	90	1,280
ILO-BLK-LBLK02X010XN	10	4000	85	1,280
ILO-BLK-LBLK02X010XW	10	3000	80	1,280
ILO-BLK-LBLK03X010XC	10	6500	90	1,380
ILO-BLK-LBLK03X010XN	10	4000	80	1,380
ILO-BLK-LBLK03X010XW	10	3000	80	1,380

10 W Length: 216 mm | Width: 132 mm | Height: 58 mm
CRI >80



Outdoor Luminaires

Reducing energy consumption and increasing road safety can now go hand-in-hand with outdoor lighting solutions from Jaquar. Choose from a wide range of durable and weather-resistant street light and flood light options in a choice of outputs to suit every road's requirement.

OUTDOOR | Roadway Lights

IP66 RATED

Street light with pressure die cast aluminium housing. LED street light will be ON automatically, when the main supply is cut off.



KRIZA EMERGENCY STREET LIGHT

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
HEL-GRY-LKRZ01SL018C	18	CW	100	1,775

18 W Mounting dia: Ø40 mm | Length: 355 mm | Width:105 mm | Height: 75 mm
Provides up to 3 hours of battery backup after a full 9-hour charge.

LED street light with pressure die cast aluminium housing with toughened glass cover.



Street Light

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
OSL-GRY-LSRT015045XC	45	5700	100	5,500

45 W Mounting dia: Ø44 mm | Length: 330 mm | Width:117 mm | Height: 67 mm
*THD <10%, CRI >70

LED street light with pressure die cast aluminium housing, top opening with separate driver compartment and toughened glass.



Street Light DOB

Item Code	Wattage (W)	CCT (K)	Efficacy (Lm/W)	MRP
OSL-GRY-LSRTDSL050XC	50	6500	100	1,450
OSL-GRY-LSRTDSL050XW	50	3000	90	1,450
OSL-GRY-LSRTDSL090XC	90	6500	100	1,925
OSL-GRY-LSRTDSL090XW	90	3000	90	1,925
OSL-GRY-LSRTDSL150XC	150	6500	100	3,050
OSL-GRY-LSRTDSL150XW	150	3000	90	3,050
OSL-GRY-LSRTDSL180XC	180	6500	100	3,350
OSL-GRY-LSRTDSL180XW	180	3000	90	3,350

50, 90, 150 & 180 W

Length: 417 | Width: 128 | Height: 28, Length: 490 | Width: 155 | Height: 28
Length: 545 | Width: 185 | Height: 28, Length: 633 | Width: 211 | Height: 28

OUTDOOR | Roadway Lights

LED street light with pressure die cast aluminium housing, top opening with separate driver compartment and polycarbonate cover.



Efficacy
>120 Lm / W

Street Light

Item Code	Wattage (W)	CCT (K)	Case No.	MRP
OSL-GRY-LSRT04S025XC	25	5700	10	3,250
OSL-GRY-LSRT04S025XW	25	3000	10	3,250
OSL-GRY-LSRTTOS025XC*	25	5700	10	3,350
OSL-GRY-LSRT015030XC	30	5700	10	3,700
OSL-GRY-LSRT015030XW	30	3000	10	3,700
OSL-GRY-LSRTTOS030XC*	30	5700	10	3,800

25 & 30 W Mounting dia: Ø26 mm | Length: 180 mm | Width: 115 mm | Height: 60 mm

*System lumen efficacy 120 Lm / W

LED street light with pressure die cast aluminium housing, top opening with separate driver compartment and toughened glass.



Efficacy
>120 Lm / W

Street Light

Item Code	Wattage (W)	CCT (K)	Case No.	MRP
OSL-GRY-LSRTTOS045XC*	45	5700	1	7,000
OSL-GRY-LSRT015060XC	60	5700	1	7,000
OSL-GRY-LSRT015060XW	60	3000	1	7,000
OSL-GRY-LSRTTOS060XC*	60	5700	1	8,100
OSL-GRY-LSRT015070XC	70	5700	1	8,200
OSL-GRY-LSRT015070XW	70	3000	1	8,200
OSL-GRY-LSRTTOS072XC*	72	5700	1	11,000

45, 60, 70 & 72 W Mounting dia: Ø53 mm | Length: 320 mm | Width: 190 mm | Height: 80 mm

*System lumen efficacy 120 Lm / W

LED street light with pressure die cast aluminium housing, top opening with separate driver compartment and toughened glass.



Efficacy
>120 Lm / W

Street Light

Item Code	Wattage (W)	CCT (K)	Case No.	MRP
OSL-GRY-LSRT015090XC	90	5700	1	10,000
OSL-GRY-LSRT015090XW	90	3000	1	10,000
OSL-GRY-LSRTTOS090XC*	90	5700	1	14,000
OSL-GRY-LSRT015120XC	120	5700	1	14,500
OSL-GRY-LSRT015120XW	120	3000	1	14,500
OSL-GRY-LSRTTOS120XC*	120	5700	1	18,000
OSL-GRY-LSRT015150XC	150	5700	1	16,000
OSL-GRY-LSRT015150XW	150	3000	1	16,000
OSL-GRY-LSRTTOS150XC*	150	5700	1	27,000
OSL-GRY-LSRT015200XC	200	5700	1	22,000
OSL-GRY-LSRT015200XW	200	3000	1	22,000
OSL-GRY-LSRTTOS200XC*	200	5700	1	33,000

90 & 120 W Mounting dia: Ø62 mm
Length: 400 mm | Width: 200 mm
Height: 108 mm

*System lumen efficacy 120 Lm / W

150 & 200 W Mounting dia: Ø62 mm
Length: 520 mm | Width: 200 mm
Height: 75 mm

OUTDOOR | Floodlights

Faro floodlight with pressure die cast aluminium housing, top opening with separate driver compartment and toughened glass.



Faro (Low wattage floodlight)

Item Code	Wattage (W)	CCT (K)	Case No.	MRP
HFL-GRY-LFRO01S030XC	30	6500	1	1,900
HFL-GRY-LFRO01S030XW	30	3000	1	1,900
HFL-GRY-LFRO01S050XC	50	6500	1	2,450
HFL-GRY-LFRO01S050XW	50	3000	1	2,450
HFL-GRY-LFRO01S100XC	100	6500	1	5,000
HFL-GRY-LFRO01S100XW	100	3000	1	5,000
HFL-GRY-LFRO01S150XC	150	6500	1	7,900
HFL-GRY-LFRO01S150XW	150	3000	1	7,900
HFL-GRY-LFRO01S190XC	190	6500	1	9,300
HFL-GRY-LFRO01S190XW	190	3000	1	9,300

30 W Length: 198 mm | Width: 188 mm | Height: 36 mm

50 W Length: 238 mm | Width: 228 mm | Height: 36 mm

100 W Length: 291 mm | Width: 281 mm | Height: 47 mm

150 W Length: 332 mm | Width: 222 mm | Height: 52 mm

190 W Length: 364 mm | Width: 344 mm | Height: 52 mm

*Efficacy is ≥ 100 Lm / W

Faro DOB flood light with pressure die cast aluminium housing with PC modular lens cover.



Faro (DOB)

Item Code	Wattage (W)	CCT (K)	Case No.	MRP
HFL-GRY-LFROD1S030XC	30	6500	1	1,550
HEL-GRY-LFROD1S030XW	30	3000	1	1,550
HFL-GRY-LFROD1S050XC	50	6500	1	1,975
HFL-GRY-LFROD1S050XW	50	3000	1	1,975
HFL-GRY-LFROD1S100XC	100	6500	1	3,700
HFL-GRY-LFROD1S100XW	100	3000	1	3,700
HFL-GRY-LFROD1S150XC	150	6500	1	5,250
HEL-GRY-LFROD1S150XW	150	3000	1	5,250
HEL-GRY-LFROD1S200XC	200	6500	1	6,450
HFL-GRY-LFROD1S200XW	200	3000	1	6,450

30 W Length: 198 mm | Width: 188 mm | Height: 36 mm

50 W Length: 238 mm | Width: 228 mm | Height: 36 mm

100 W Length: 291 mm | Width: 281 mm | Height: 47 mm

150 W Length: 332 mm | Width: 222 mm | Height: 52 mm

200 W Length: 364 mm | Width: 344 mm | Height: 52 mm

*Efficacy is ≥ 100 Lm / W

OUTDOOR | Floodlights

IP66 rated floodlight with high pressure die cast aluminium housing, lens and toughened glass cover offering lumen intensity >110 Lm / W.

Efficacy
>110 Lm / W
With external
SPD 10KV



Ledstar

Item Code	Wattage (W)	CCT (K)	Case No.	MRP
OFL-GRY-LFLDLSLS070XC	70	5700	1	9,450
OFL-GRY-LFLDLSLS070XW	70	3000	1	9,450
OFL-GRY-LFLDLSLS100XC	100	5700	1	10,000
OFL-GRY-LFLDLSLS100XW	100	3000	1	10,000
OFL-GRY-LFLDLSLS120XC	120	5700	1	12,500
OFL-GRY-LFLDLSLS120XW	120	3000	1	12,500
OFL-GRY-LFLDLSLS150XC	150	5700	1	17,000
OFL-GRY-LFLDLSLS150XW	150	3000	1	17,000
OFL-GRY-LFLDLSLS200XC	200	5700	1	22,500
OFL-GRY-LFLDLSLS200XW	200	3000	1	22,500
OFL-GRY-LFLDLSLS240XC	240	5700	1	25,000
OFL-GRY-LFLDLSLS240XW	240	3000	1	25,000
OFL-GRY-LFLDSL300XC	300	5700	1	33,000
OFL-GRY-LFLDLSLS300XW	300	3000	1	33,000
OFL-GRY-LFLDLSLS350XC	350	5700	1	38,000
OFL-GRY-LFLDLSLS350XW	350	3000	1	38,000
OFL-GRY-LFLDLSLS400XC	400	5700	1	45,500
OFL-GRY-LFLDLSLS400XW	400	3000	1	45,500

70 W Length: 230 mm | Width: 195 mm | Height: 53 mm

100 & 120 W Length: 290 mm | Width: 240 mm | Height: 60 mm

150 W Length: 360 mm | Width: 295 mm | Height: 74 mm

200 W Length: 438 mm | Width: 338 mm | Height: 76 mm

240 W Length: 388 mm | Width: 297 mm | Height: 150 mm

300 W Length: 388 mm | Width: 297 mm | Height: 150 mm

400 & 350 W Length: 485 mm | Width: 350 mm | Height: 135 mm

Cone Bollard

Features

Die cast aluminium housing
Opal diffuser with in-built LED
140 V - 270 V AC
IP65



Product Code

OBL-GRY-LBLDCON010XW

Wattage

10 W LED

MRP: 3,550

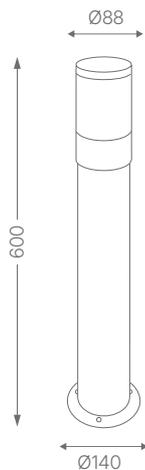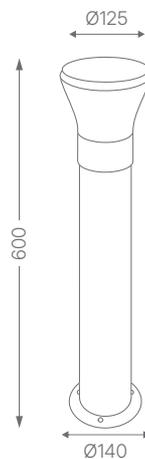

Cylinder Bollard

Features

Die cast aluminium housing
Opal diffuser with in-built LED
140 V - 270 V AC
IP65

Product Code

OBL-GRY-LBLDCYL010XW

Wattage

10 W LED

MRP: 3,750

Disc Bollard

Features

Die cast aluminium housing
Opal diffuser with in-built LED
140 V - 270 V AC
IP65

Product Code

OBL-GRY-LBLDDSC010XW

Wattage

10 W LED

MRP: 4,400



Orbarix

Features

Die cast aluminium housing
Tempered glass diffuser
Matt grey finish
90 V - 260 V AC
Warm white
IP54

Product Code

OBL-GRY-LBLD02R108XW

Wattage

8 W COB LED

MRP: 9,250

Mushroom Bollard

Features

Die cast aluminium housing
Opal diffuser with in-built LED
140 V - 270 V AC
IP65


Product Code

OBL-GRY-LBLDMSH009XW

Wattage

9 W LED

MRP: 2,825

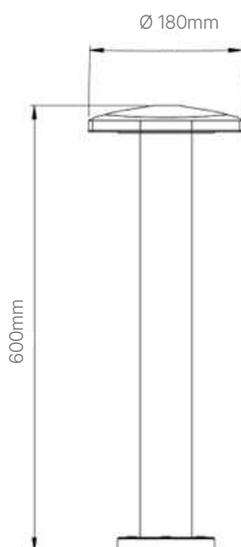

Mushroom Bollard

Features

Die cast aluminium housing
Opal diffuser with in-built LED
140 V - 270 V AC
IP65


Product Code

OBL-GRY-LBLD20X015XW

Wattage

15 W LED

MRP: 3,700



Foot Light

Features

Die cast aluminium housing
Polycarbonate diffuser
White and grey finish
150 V - 300 V AC
IP54

Product Code

OWA-BLK-LFTL01S003XW*
OWA-WHT-LFTLW1S003XW#

Wattage

3 W LED

*Grey housing | #White housing

MRP: 910

Robo Light

Features

Die cast aluminium housing
Black powder coated
Warm white
140 V - 270 V AC
IP65

Product Code


OWA-BLK-LWWL05S401XW
OWA-BLK-LWWL05S201XW

Wattage

4 x 1 W
2 x 1 W

4 W MRP: 1090

2 W MRP: 1025

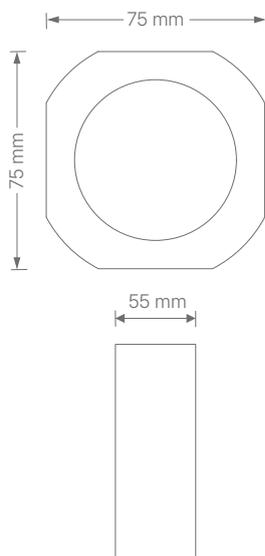

4 WAY



2 WAY



Gemini Light

Features

Die cast aluminium housing
Black powder coated
Warm white
140 V - 270 V AC
IP65

Product Code

OWA-GRY-LWWL145010XW

Wattage

10 W

MRP: 4250



Consumer Lights

Reflect your story to the world and let your spaces shine at their best with the right lighting solutions from Jaquar Lighting.

Choose from an array of options in varied sizes, shapes, and budgets, and enhance the indoor and outdoor spaces that will uplift the ambience invariably.

Our range of lighting includes: Smart Lights

- Downlights
- Spot Lights
- Battens
- Lamps
- Strip Lights
- Street Lights

BENEFITS:



ENERGY SAVINGS
UP TO 90%



LONG LIFE



NO UV / IR
RADIATION



SLEEK AND
COMPACT DESIGN



GREEN LIGHTING
SOLUTIONS



MAINTENANCE-
FREE



UNIFORM
ILLUMINATION



GLARE-FREE
LIGHTING

Bryte Square

Item Code	Wattage (W)	CCT (K)	Cutout (MM)	Dimension in (L X W X H / DXH)	MRP
HDL-WHT-LBRT01S003XC	3	6500	70 x 70	82 x 82 x 26	380
HDL-WHT-LBRT01S003XN	3	4000	70 x 70	82 x 82 x 26	380
HDL-WHT-LBRT01S003XW	3	3000	70 x 70	82 x 82 x 26	380
HDL-WHT-LBRT01S006XC	6	6500	105 x 105	116 x 116 x 26	490
HDL-WHT-LBRT01S006XN	6	4000	105 x 105	116 x 116 x 26	490
HDL-WHT-LBRT01S006XW	6	3000	105 x 105	116 x 116 x 26	490
HDL-WHT-LBRT01S009XC	9	6500	105 x 105	116 x 116 x 26	550
HDL-WHT-LBRT01S009XN	9	4000	105 x 105	116 x 116 x 26	550
HDL-WHT-LBRT01S009XW	9	3000	105 x 105	116 x 116 x 26	550
HDL-WHT-LBRT01S012XC	12	6500	132 x 132	144 x 144 x 28	620
HDL-WHT-LBRT01S012XN	12	4000	132 x 132	144 x 144 x 28	620
HDL-WHT-LBRT01S012XW	12	3000	132 x 132	144 x 144 x 28	620
HDL-WHT-LBRT01S015XC	15	6500	155 x 155	166 x 166 x 28	700
HDL-WHT-LBRT01S015XW	15	4000	155 x 155	166 x 166 x 28	700
HDL-WHT-LBRT01S015XN	15	3000	155 x 155	166 x 166 x 28	700
HDL-WHT-LBRT01S018XC	18	6500	155 x 155	166 x 166 x 28	750
HDL-WHT-LBRT01S018XN	18	4000	155 x 155	166 x 166 x 28	750
HDL-WHT-LBRT01S018XW	18	3000	155 x 155	166 x 166 x 28	750
HDL-WHT-LBRT01S022XC	22	6500	175 x 175	184 x 184 x 28	850
HDL-WHT-LBRT01S022XN	22	4000	175 x 175	184 x 184 x 28	850
HDL-WHT-LBRT01S022XW	22	3000	175 x 175	184 x 184 x 28	850



Technical data:

- Input voltage range: 140 V -270 V AC
- Luminous efficacy: >55 Lm/W for 6 W, >120 Lm/W for 22 W
- Power factor: >0.90
- Housing material: Aluminum housing with PC back plate



Bryte Round

Item Code	Wattage (W)	CCT (K)	Cutout (MM)	Dimension in MM(DXH)	MRP
HDL-WHT-LBRT01R003XC	3W	6500	Ø70	Ø 82 x 26	380
HDL-WHT-LBRT01R003XN	3W	4000	Ø70	Ø 82 x 26	380
HDL-WHT-LBRT01R003XW	3W	3000	Ø70	Ø 82 x 26	380
HDL-WHT-LBRT01R006XC	6W	6500	Ø106	Ø 116 x 26	490
HDL-WHT-LBRT01R006XN	6W	4000	Ø106	Ø 116 x 26	490
HDL-WHT-LBRT01R006XW	6W	3000	Ø106	Ø 116 x 26	490
HDL-WHT-LBRT01R009XC	9W	6500	Ø106	Ø 116 x 26	550
HDL-WHT-LBRT01R009XN	9W	4000	Ø106	Ø 116 x 26	550
HDL-WHT-LBRT01R009XW	9W	3000	Ø106	Ø 116 x 26	550
HDL-WHT-LBRT01R012XC	12W	6500	Ø132	Ø 144 x 28	620
HDL-WHT-LBRT01R012XN	12W	4000	Ø132	Ø 144 x 28	620
HDL-WHT-LBRT01R012XW	12W	3000	Ø132	Ø 144 x 28	620
HDL-WHT-LBRT01R015XC	15W	6500	Ø155	Ø 166 x 28	700
HDL-WHT-LBRT01R015XW	15W	4000	Ø155	Ø 166 x 28	700
HDL-WHT-LBRT01R015XN	15W	3000	Ø155	Ø 166 x 28	700
HDL-WHT-LBRT01R018XC	18W	6500	Ø155	Ø 166 x 28	750
HDL-WHT-LBRT01R018XN	18W	4000	Ø155	Ø 166 x 28	750
HDL-WHT-LBRT01R018XW	18W	3000	Ø155	Ø 166 x 28	750
HDL-WHT-LBRT01R022XC	22W	6500	Ø175	Ø 184 x 28	850
HDL-WHT-LBRT01R022XN	22W	4000	Ø175	Ø 184 x 28	850
HDL-WHT-LBRT01R022XW	22W	3000	Ø175	Ø 184 x 28	850



Technical data:

- Input voltage range: 140 V -270 V AC
- Luminous efficacy: >55 Lm/W for 6 W, >120 Lm/W for 22 W
- Power factor: >0.90
- Housing material: Aluminum housing with PC back plate

*2/3/5 year warranty applicable on all lighting products

Strella HD

Item Code	Wattage (W)	CCT (K)	Cutout (MM)	Dimension in MM (L X W X H / DXH)	MRP
HDL-WHT-LSTA4KVR05XC	5	CW	Ø 70	Ø 80 × 35	225
HDL-WHT-LSTA4KVR05XN	5	NW	Ø 70	Ø 80 × 35	225
HDL-WHT-LSTA4KVR05XW	5	WW	Ø 70	Ø 80 × 35	225
HDL-WHT-LSTA4KVS08XC	8	CW	105 × 105	116 × 116 × 35	350
HDL-WHT-LSTA4KVS08XN	8	NW	105 × 105	116 × 116 × 35	350
HDL-WHT-LSTA4KVS08XW	8	WW	105 × 105	116 × 116 × 35	350
HDL-WHT-LSTA4KVR08XC	8	CW	Ø 105	Ø 116 × 35	350
HDL-WHT-LSTA4KVR08XN	8	NW	Ø 105	Ø 116 × 35	350
HDL-WHT-LSTA4KVR08XW	8	WW	Ø 105	Ø 116 × 35	350
HDL-WHT-LSTA4KVS12XC	12	CW	125 × 125	132 × 132 × 35	480
HDL-WHT-LSTA4KVS12XN	12	NW	125 × 125	132 × 132 × 35	480
HDL-WHT-LSTA4KVS12XW	12	WW	125 × 125	132 × 132 × 35	480
HDL-WHT-LSTA4KVR12XC	12	CW	Ø 155	Ø 162 × 35	480
HDL-WHT-LSTA4KVR12XN	12	NW	Ø 155	Ø 162 × 35	480
HDL-WHT-LSTA4KVR12XW	12	WW	Ø 155	Ø 162 × 35	480
HDL-WHT-LSTA01S015XC	15	CW	155 × 155	162 × 162 × 35	550
HDL-WHT-LSTA01S015XN	15	NW	155 × 155	162 × 162 × 35	550
HDL-WHT-LSTA01S015XW	15	WW	155 × 155	162 × 162 × 35	550
HDL-WHT-LSTA01R015XC	15	CW	Ø 155	Ø 162 × 35	550
HDL-WHT-LSTA01R015XN	15	NW	Ø 155	Ø 162 × 35	550
HDL-WHT-LSTA01R015XW	15	WW	Ø 155	Ø 162 × 35	550
HDL-WHT-LSTA01S022XC	22	CW	205 × 205	220 × 220 × 35	930
HDL-WHT-LSTA01S022XN	22	NW	205 × 205	220 × 220 × 35	930
HDL-WHT-LSTA01S022XW	22	WW	205 × 205	220 × 220 × 35	930
HDL-WHT-LSTA01R022XC	22	CW	Ø 205	Ø 220 × 35	930
HDL-WHT-LSTA01R022XN	22	NW	Ø 205	Ø 220 × 35	930
HDL-WHT-LSTA01R022XW	22	WW	Ø 205	Ø 220 × 35	930



Long life

CRI>80

Beam angle >120°

Technical data:

- Input voltage range: 140 V -270 V AC
- Luminous efficacy: >90 Lm/W
- Power factor: >0.95
- Housing material: Thermally conductive polycarbonate



Long life

CRI>80

Beam angle >120°

Technical data:

- Input voltage range: 140 V -270 V AC
- Luminous efficacy: >90 Lm/W
- Power factor: >0.95
- Housing material: Thermally conductive polycarbonate

Strella Slim HD

Item Code	Wattage (W)	CCT (K)	Cutout (MM)	Dimension in MM (L X W X H / DXH)	MRP
HDL-WHT-LSTASL1R05XC	5	CW	Ø75	Ø95 × 26	370
HDL-WHT-LSTASL1R05XN	5	NW	Ø75	Ø95 × 26	370
HDL-WHT-LSTASL1R05XW	5	WW	Ø75	Ø95 × 26	370
HDL-WHT-LSTASL1R08XC	8	CW	Ø102	Ø130 × 26	500
HDL-WHT-LSTASL1R08XN	8	NW	Ø102	Ø130 × 26	500
HDL-WHT-LSTASL1R08XW	8	WW	Ø102	Ø130 × 26	500
HDL-WHT-LSTASL1R12XC	12	CW	Ø124	Ø142 × 27	570
HDL-WHT-LSTASL1R12XN	12	NW	Ø124	Ø142 × 27	570
HDL-WHT-LSTASL1R12XW	12	WW	Ø124	Ø142 × 27	570
HDL-WHT-LSTASL1R15XC	15	CW	Ø149	Ø172 × 27	700
HDL-WHT-LSTASL1R15XN	15	NW	Ø149	Ø172 × 27	700
HDL-WHT-LSTASL1R15XW	15	WW	Ø149	Ø172 × 27	700
HDL-WHT-LSTASL1S05XC	5	CW	75 × 75	95 × 95 × 26	370
HDL-WHT-LSTASL1S05XN	5	NW	75 × 75	95 × 95 × 26	370
HDL-WHT-LSTASL1S05XW	5	WW	75 × 75	95 × 95 × 26	370
HDL-WHT-LSTASL1S08XC	8	CW	102 × 102	130 × 130 × 26	500
HDL-WHT-LSTASL1S08XN	8	NW	102 × 102	130 × 130 × 26	500
HDL-WHT-LSTASL1S08XW	8	WW	102 × 102	130 × 130 × 26	500
HDL-WHT-LSTASL1S12XC	12	CW	124 × 124	142 × 142 × 27	570
HDL-WHT-LSTASL1S12XN	12	NW	124 × 124	142 × 142 × 27	570
HDL-WHT-LSTASL1S12XW	12	WW	124 × 124	142 × 142 × 27	570
HDL-WHT-LSTASL1S15XC	15	CW	149 × 149	172 × 172 × 27	700
HDL-WHT-LSTASL1S15XN	15	NW	149 × 149	172 × 172 × 27	700
HDL-WHT-LSTASL1S15XW	15	WW	149 × 149	172 × 172 × 27	700



Strella Deep Recess

Item Code	Wattage (W)	CCT (K)	Cutout (MM)	Dimension in MM (L X W X H / DXH)	MRP
HDL-WHT-LSTADR1R10XC	10	CW	Ø108	Ø119 × 55	760
HDL-WHT-LSTADR1R10XN	10	NW	Ø108	Ø119 × 55	760
HDL-WHT-LSTADR1R10XW	10	WW	Ø108	Ø119 × 55	760
HDL-WHT-LSTADR1R15XC	15	CW	Ø140	Ø151 × 60	950
HDL-WHT-LSTADR1R15XN	15	NW	Ø140	Ø151 × 60	950
HDL-WHT-LSTADR1R15XW	15	WW	Ø140	Ø151 × 60	950



Long life

CRI > 80

Beam angle > 100°

Technical data:

- Input voltage range: 140 V -270 V AC
- Luminous efficacy: >90 Lm/W
- Power factor: >0.95
- Housing material: Thermally conductive polycarbonate



Long life

CRI > 80

Beam angle > 120°

*3-in-1 color option CW-NW-WW

Technical & Commercial Data:

- Input voltage range: 140 V -270 V AC
- Luminous efficacy: >100 Lm/W @6500K
- Power factor: >0.95
- Housing material: Thermally conductive polycarbonate



Strella Tri-color

Item Code	Wattage (W)	CCT (K)	Cutout (MM)	Dimension in MM(DXH)	MRP
HDL-WHT-LSTA3IN1R15X	15	CW/ NW/ WW	Φ 155	Φ 162 x 35	810
HDL-WHT-LSTA3IN1R08X	8	CW/ NW/ WW	Φ 155	Φ 116 x 35	550



Strella Accessories

Item Code	Wattage (W)	Dimension in MM (L X W X H / DXH)	MRP
HDL-WHT-LSTA01SMS008	8	105 × 105	135
HDL-WHT-LSTA01SMR008	8	Ø 105	135
HDL-WHT-LSTA01SMS015	15	155 × 155	145
HDL-WHT-LSTA01SMR015	15	Ø 155	145
HDL-WHT-LSTA01SMS022	22	205 × 205	205
HDL-WHT-LSTA01SMR022	22	Ø 205	205



BATTERY BACKUP

Technical data:

- Housing material: Thermally conductive polycarbonate
- Easy & safe installation
- Dazzle free soft light & no dark patches
- AC/DC Downlight - Perfect for power cuts and emergency situations

KRIZA
EMERGENCY DOWNLIGHT

Item Code	Wattage (W)	CCT (K)	Dimension in MM (DXH)	MRP
HEL-WHT-KRZ01DLR15SC	15	6500	Ø 146 × 48	1,400

Pearl Plus

Item Code	Wattage (W)	CCT (K)	Cutout (MM)	Dimension in MM (DXH)	MRP
HDL-WHT-LPPSD1R003XC	3	CW	Ø55	Ø 80 × 31	150
HDL-WHT-LPPSD1R003XN	3	NW	Ø55	Ø 80 × 31	150
HDL-WHT-LPPSD1R003XW	3	WW	Ø55	Ø 80 × 31	150
HDL-WHT-LPPSD1R003XR	3	RED	Ø55	Ø 80 × 31	150
HDL-WHT-LPPSD1R003XG	3	GREEN	Ø55	Ø 80 × 31	150
HDL-WHT-LPPSD1R003XB	3	BLUE	Ø55	Ø 80 × 31	150
HDL-WHT-LPPSD1R003XP	3	PINK	Ø55	Ø 80 × 31	150
HDL-WHT-LPPSD1R003XV	3	VOILET / PURPLE	Ø55	Ø 80 × 31	150
HDL-WHT-LPPSD2R006XC	6	CW	Ø 45	Ø 80 × 45	325
HDL-WHT-LPPSD2R006XN	6	NW	Ø 45	Ø 80 × 45	325
HDL-WHT-LPPSD2R006XW	6	WW	Ø 45	Ø 80 × 45	325
HDL-WHT-LPPSD2R006XR	6	RED	Ø 45	Ø 80 × 45	325
HDL-WHT-LPPSD2R006XG	6	GREEN	Ø 45	Ø 80 × 45	325
HDL-WHT-LPPSD2R006XB	6	BLUE	Ø 45	Ø 80 × 45	325
HDL-WHT-LPPSD2R006XP	6	PINK	Ø 45	Ø 80 × 45	325
HDL-WHT-LPPSD2R006XV	6	VIOLET / PURPLE	Ø 45	Ø 80 × 45	325



Technical data:

- Input voltage range: 140 V -270 V AC
- Luminous efficacy: >70 Lm/W for 3 W, >80 Lm/W for 6 W
- Power factor: >0.9
- Housing material: Thermally conductive polycarbonate
- Suitable for junction box fitment



Striker

Item Code	Wattage (W)	CCT (K)	Cutout (MM)	Dimension in MM (DXH / L X W X H)	MRP
HDL-WHT-LSTKD1R006XC	6	CW	Ø 83	Ø 108 × 62	205
HDL-WHT-LSTKD1R006XN	6	NW	Ø 83	Ø 108 × 62	205
HDL-WHT-LSTKD1R006XW	6	WW	Ø 83	Ø 108 × 62	205
HDL-WHT-LSTKD1R006XR	6	RED	Ø 83	Ø 108 × 62	205
HDL-WHT-LSTKD1R006XG	6	GREEN	Ø 83	Ø 108 × 62	205
HDL-WHT-LSTKD1R006XB	6	BLUE	Ø 83	Ø 108 × 62	205
HDL-WHT-LSTKD1R006XP	6	PINK	Ø 83	Ø 108 × 62	205
HDL-WHT-LSTKD1R006XV	6	VOILET / PURPLE	Ø 83	Ø 108 × 62	205
HDL-WHT-LSTK01R008XC	8	CW	Ø 77	Ø 111 × 49	355
HDL-WHT-LSTK01R008XN	8	NW	Ø 77	Ø 111 × 49	355
HDL-WHT-LSTK01R008XW	8	WW	Ø 77	Ø 111 × 49	355



Long life



CRI > 80



Beam angle > 120°

Technical data:

- Input voltage range: 140 V - 270 V AC
- Luminous efficacy: >75 Lm/W
- Power factor: >0.95
- Housing material: Thermally conductive polycarbonate with aluminium heat sink
- Suitable for junction concealed box fitment



Long life



CRI > 80



Beam angle > 120°

Striker Mini

Item Code	Wattage (W)	CCT (K)	Dimension in MM (DXH / L X W X H)	MRP
HDL-WHT-LSTKM1R003XC	3	CW	Ø 68 × 14	175
HDL-WHT-LSTKM1R003XN	3	NW	Ø 68 × 14	175
HDL-WHT-LSTKM1R003XW	3	WW	Ø 68 × 14	175
HDL-WHT-LSTKM1R003XR	3	RED	Ø 68 × 14	175
HDL-WHT-LSTKM1R003XG	3	GREEN	Ø 68 × 14	175
HDL-WHT-LSTKM1R003XB	3	BLUE	Ø 68 × 14	175
HDL-WHT-LSTKM1R003XP	3	PINK	Ø 68 × 14	175
HDL-WHT-LSTKM1R003XV	3	VOILET / PURPLE	Ø 68 × 14	175

Technical data:

- Input voltage range: 220 V - 240 V AC
- Luminous efficacy: >65 Lm/W
- Power factor: >0.9
- Housing material: Thermally conductive polycarbonate
- Suitable for Under Desk surface mount



Long life



CRI > 80



Beam angle
>24°

Technical data:

- Input voltage range: 220-240 V AC
- Luminous efficacy: >70 Lm/W
- Power factor: >0.90
- Housing material: Die cast aluminium housing with black powder coating

Eris Surface Round

Item Code	Wattage (W)	CCT (K)	Cutout (MM)	Dimension in MM (DXH)	MRP
HCO-BLK-LERSBRGR05SC	5	CW	Ø 53	Ø 53 × 70	1,130
HCO-BLK-LERSBRGR05SN	5	NW	Ø 53	Ø 53 × 70	1,130
HCO-BLK-LERSBRGR05SW	5	WW	Ø 53	Ø 53 × 70	1,130
HCO-BLK-LERSBRGR10SC	10	CW	Ø 72	Ø 72 × 90	1,440
HCO-BLK-LERSBRGR10SN	10	NW	Ø 72	Ø 72 × 90	1,440
HCO-BLK-LERSBRGR10SW	10	WW	Ø 72	Ø 72 × 90	1,440
HCO-BLK-LERSBRGR15SC	15	CW	Ø 95	Ø 95 × 95	2,350
HCO-BLK-LERSBRGR15SN	15	NW	Ø 95	Ø 95 × 95	2,350
HCO-BLK-LERSBRGR15SW	15	WW	Ø 95	Ø 95 × 95	2,350

Twilite

Item Code	Wattage (W)	CCT (K)	Cutout (MM)	Dimension in MM (DXH)	MRP
HCO-WHT-LTWL1R2W05XC	7	6500	Ø 55	Ø 65 × 55	1,425
HCO-WHT-LTWL1R2W05XN	7	4000	Ø 55	Ø 65 × 55	1,425
HCO-WHT-LTWL1R2W05XW	7	3000	Ø 55	Ø 65 × 55	1,425
HCO-WHT-LTWL1R3W09XC	12	6500	Ø 70	Ø 95 × 65	1,625
HCO-WHT-LTWL1R3W09XN	12	4000	Ø 70	Ø 95 × 65	1,625
HCO-WHT-LTWL1R3W09XW	12	3000	Ø 70	Ø 95 × 65	1,625



Long life



CRI > 90



Beam angle
>40°



BLACK RING
also included
in this pack

Technical data:

- Input voltage range: 220-240 V AC
- Luminous efficacy: >75 Lm/W
- Power factor: >0.90
- Housing material: Polycarbonate housing
- Suitable for junction concealed box fitment

Alina

Item Code	Wattage (W)	CCT (K)	Cutout (MM)	Dimension in MM (DXH)	MRP
HCO-WHT-LALN02R007XC	7	6500	Ø75	Ø107× 70	650
HCO-WHT-LALN02R007XN	7	4000	Ø75	Ø107× 70	650
HCO-WHT-LALN02R007XW	7	3000	Ø75	Ø107× 70	650



Long life CRI>80 Beam angle >65°

Technical data:

- Input voltage range: 220-240 V AC
- Luminous efficacy: >90 Lm/W
- Power factor: >0.95
- Housing material: Polycarbonate body with aluminum heat sink & lens

Gem Blaze

Item Code	Wattage (W)	CCT (K)	Cutout (MM)	Dimension in MM (DXH)	MRP
HCO-WHT-LGEMB01R03XC	3	6500	Ø 55.5	Ø 74.5 × 42	300
HCO-WHT-LGEMB01R03XN	3	4000	Ø 55.5	Ø 74.5 × 42	300
HCO-WHT-LGEMB01R03XW	3	3000	Ø 55.5	Ø 74.5 × 42	300
HCO-WHT-LGEMB01R06XC	6	6500	Ø 67.5	Ø 94.5 × 46	390
HCO-WHT-LGEMB01R06XN	6	4000	Ø 67.5	Ø 94.5 × 46	390
HCO-WHT-LGEMB01R06XW	6	3000	Ø 67.5	Ø 94.5 × 46	390
HCO-WHT-LGEMB01R09XC	9	6500	Ø 87	Ø 116 × 53	455
HCO-WHT-LGEMB01R09XN	9	4000	Ø 87	Ø 116 × 53	455
HCO-WHT-LGEMB01R09XW	9	3000	Ø87	Ø 116 × 53	455



Gem Star

Item Code	Wattage (W)	CCT (K)	Cutout (MM)	Dimension in MM (DXH)	MRP
HDL-WHT-LGEMS01R03XC	3	6500	Ø 60	70 × 35	250
HDL-WHT-LGEMS01R03XN	3	4000	Ø 60	70 × 35	250
HDL-WHT-LGEMS01R03XW	3	3000	Ø 60	70 × 35	250

Technical data:

- Surge protection upto 4KV
- Sustain voltage upto 400V
- Input voltage range: 220-240 V AC
- Luminous efficacy: >75 Lm/W
- Power factor: >0.90
- CRI: >80
- Polycarbonate housing



Gem Surface Round



Long life CRI>80 Beam angle >120°

Technical data:

- Input voltage range: 100 V - 230 V AC
- Luminous efficacy: For 6 & 12 W (65 Lm/W) For 18 W (60 Lm/W)
- Power factor: >0.9
- Housing material: PC body & diffuser with metal mounting plate

Item Code	Wattage (W)	CCT (K)	Cutout (MM)	Dimension in MM (DXH)	MRP
HDL-WHT-LGEM01R006SC	6	6500	Ø90	90 × 27	440
HDL-WHT-LGEM01R006SW	6	4000	Ø90	90 × 27	440
HDL-WHT-LGEM01R006SN	6	3000	Ø90	90 × 27	440
HDL-WHT-LGEM01R012SC	12	6500	Ø121	121 × 27	630
HDL-WHT-LGEM01R012SW	12	4000	Ø121	121 × 27	630
HDL-WHT-LGEM01R012SN	12	3000	Ø121	121 × 27	630
HDL-WHT-LGEM01R018SC	18	6500	Ø156	156 × 27	950
HDL-WHT-LGEM01R018SW	18	4000	Ø156	156 × 27	950
HDL-WHT-LGEM01R018SN	18	3000	Ø156	156 × 27	950

*2/3/5 year warranty applicable on all lighting products



Gem Surface Square

Item Code	Wattage (W)	CCT (K)	Cutout (MM)	Dimension in MM (DXH)	MRP
HDL-WHT-LGEM01S006SC	6	6500	-	90 × 90	440
HDL-WHT-LGEM01S006SN	6	4000	-	90 × 90	440
HDL-WHT-LGEM01S006SW	6	3000	-	90 × 90	440
HDL-WHT-LGEM01S012SC	12	6500	-	120 × 120	630
HDL-WHT-LGEM01S012SN	12	4000	-	120 × 120	630
HDL-WHT-LGEM01S012SW	12	3000	-	120 × 120	630
HDL-WHT-LGEM01S018SC	18	6500	-	155 × 155	950
HDL-WHT-LGEM01S018SN	18	4000	-	155 × 155	950
HDL-WHT-LGEM01S018SW	18	3000	-	155 × 155	950

Technical data:

- Input voltage range: 100 V - 230 V AC
- Luminous efficacy: For 6 & 12 W (65 Lm/W)
For 18 W (60 Lm/W)
- Power factor: >0.9
- Housing material: PC body & diffuser with metal mounting plate




Jasper Prime

Item Code	Wattage (W)	CCT (K)	Cutout (MM)	Dimension in MM (DXH)	MRP
HCO-WHT-LJPM01R002XC	2	CW	Ø 35	Ø 43 × 105	105
HCO-WHT-LJPM01R002XG	2	GW	Ø 35	Ø 43 × 105	105
HCO-WHT-LJPM01R002XW	2	WW	Ø 35	Ø 43 × 105	105
HCO-WHT-LJPM01R002XR	2	RW	Ø 35	Ø 43 × 105	105
HCO-WHT-LJPM01R002XB	2	BW	Ø 35	Ø 43 × 105	105



Technical data:

- Input voltage range: 140 V -270 V AC
- Luminous efficacy: >50 Lm/W
- Housing material: Thermally conductive polycarbonate

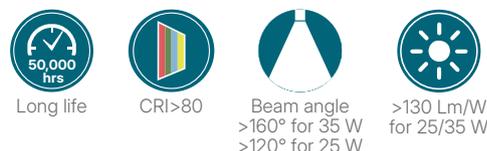

Technical data:

- Input voltage range: 140 V -270 V AC
- Power factor: >0.95
- Housing material: Extruded aluminium

Kubik Ultra

Item Code	Wattage (W)	CCT (K)	Dimension in MM (L X W X H)	MRP
HBT-WHT-LGLZU1X025XC	25	CW	1135 × 31 × 40	640
HBT-WHT-LKBU4KVS35XC	35	CW	1135 × 22 × 37	790



Long life



CRI > 80



Beam angle
> 120°



100 Lm/W
for 6 W - 20 W

Technical data:

- Input voltage range: 140 V - 270 V AC
- Power factor: >0.95
- Housing material: Thermally conductive polycarbonate

Kubik Plus

Item Code	Wattage (W)	CCT (K)	Dimension in MM (DXH)	MRP
HBT-WHT-LKBP01S006XC	6	CW	300 × 22 × 37	205
HBT-WHT-LKBP01S006XN	6	NW	300 × 22 × 37	205
HBT-WHT-LKBP01S006XW	6	WW	300 × 22 × 37	205
HBT-WHT-LKBP4KV010XC	10	CW	575 × 22 × 37	270
HBT-WHT-LKBP4KV010XN	10	NW	575 × 22 × 37	270
HBT-WHT-LKBP4KV010XW	10	WW	575 × 22 × 37	270
HBT-WHT-LKBP4KV020XC	20	CW	1090 × 22 × 37	315
HBT-WHT-LKBP4KV020XN	20	NW	1090 × 22 × 37	315
HBT-WHT-LKBP4KV020XW	20	WW	1090 × 22 × 37	315
HBT-WHT-LKBP4KV025XC	25	CW	1135 × 35 × 40	490
HBT-WHT-LKBP4KV025XN	25	NW	1135 × 35 × 40	490
HBT-WHT-LKBP4KV025XW	25	WW	1135 × 35 × 40	490



BATTERY BACKUP



Long life



CRI > 80



Beam angle
> 120°

**KRIZA
INVERTER BATTEN**

Item Code	Wattage (W)	CCT (K)	Dimension in MM (L X W X H)	MRP
HEL-WHT-LKRZ01BAT10C	10	CW	570 × 25.5 × 38	590
HEL-WHT-LKRZ01BAT20C	20	CW	1135 × 22 × 37	na

Technical data:

- Operating voltage: 100-300 V AC, 50 Hz
- Colour temperature: 6500K
- IP rating: 20
- Battery: Li-ION battery
- Battery capacity: 2200 mAh
- Charging time: 9 hours
- Overcharge protection: Yes
- Cycle lifetime of battery: 300 times (Completely charged and discharged)



KRIZA EMERGENCY BULB

Item Code	Wattage (W)	CCT (K)	Dimension in MM (DXH)	MRP
HEL-WHT-LKRZ009B22CW	9	6500	Ø 70 × 146	470
HEL-WHT-LKRZ012B22CW	12	6500	Ø 70 × 146	550




Technical data:

- Input voltage range: 100 - 300 V AC
- Luminous efficacy: >80 Lm/W @ Normal Supply
- Power factor: >0.95
- Charging time: Minimum 6 Hours
- Housing materials: Thermally conductive polycarbonate
- Battery Backup 9W - up to 5 Hours & 12W - up to 8 Hours

Applicable for 12W only:

- Charges even in light off mode
- 2 Dimming mode during backup 4W & 2W
- Backup time Dim 1 : 4 Hours, Dim 2 : 8 Hours




Illuminator

Item Code	Base Cap	Wattage (W)	CCT (K)	Dimension in MM (DXH)	MRP
HLB-WHT-LILMD30B22CW	B22	30	CW	Ø 100 × 180	650
HLB-WHT-LILMD40B22CW	B22	40	CW	Ø 115 × 198	750
HLB-WHT-LILMD50B22CW	B22	50	CW	Ø 125 × 220	850

Technical data:

- Input voltage range: 140 V -270 V AC
- Luminous efficacy: 100 Lm/W
- Power factor: >0.95
- Housing material: Die cast aluminium



Moonlux

Item Code	Base Cap	Wattage (W)	CCT (K)	Dimension in MM (DXH)	MRP
HLB-WHT-LMNLX1R20B2C	B22	7	CW	Ø 188 × 58	595
HLB-WHT-LMNLX1R30B2C	B22	7	CW	Ø 218 × 50	785

Technical data:

- Input voltage range: 140 V -270 V AC
- Luminous efficacy: 90 Lm/W
- Power factor: >0.95
- Housing material: CRCA

*2/3/5 year warranty applicable on all lighting products



Prima HD

Item Code	Base Cap	Wattage (W)	CCT (K)	Dimension in MM (DXH)	MRP
HLB-WHT-LPRM4KV03B2C	B22	3	CW	Ø 50 × 92	120
HLB-WHT-LPRM4KV03B2W	B22	3	WW	Ø 50 × 92	120
HLB-WHT-LPRM4KV03E2C	E27	3	CW	Ø 50 × 92	120
HLB-WHT-LPRM4KV03E2W	E27	3	WW	Ø 50 × 92	120
HLB-WHT-LPRMD4K05B2C	B22	5	CW	Ø 60 × 112	130
HLB-WHT-LPRMD4K05B2W	B22	5	WW	Ø 60 × 112	130
HLB-WHT-LPRMD4K05E2C	E27	5	CW	Ø 60 × 112	130
HLB-WHT-LPRMD4K05E2W	E27	5	WW	Ø 60 × 112	130
HLB-WHT-LPRMD4K07B2C	B22	7	CW	Ø 60 × 112	140
HLB-WHT-LPRMD4K07B2W	B22	7	WW	Ø 60 × 112	140
HLB-WHT-LPRMD4K07E2C	E27	7	CW	Ø 60 × 112	140
HLB-WHT-LPRMD4K07E2W	E27	7	WW	Ø 60 × 112	140
HLB-WHT-LPRMD4K09B2C	B22	9	CW	Ø 60 × 112	140
HLB-WHT-LPRMD4K09B2W	B22	9	WW	Ø 60 × 112	140
HLB-WHT-LPRMD4K09E2C	E27	9	CW	Ø 60 × 112	140
HLB-WHT-LPRMD4K09E2W	E27	9	WW	Ø 60 × 112	140
HLB-WHT-LPRMD4K12B2C	B22	12	CW	Ø 65 × 118	225
HLB-WHT-LPRMD4K12B2W	B22	12	WW	Ø 65 × 118	255
HLB-WHT-LPRMD4K12E2C	E27	12	CW	Ø 65 × 118	225
HLB-WHT-LPRMD4K12E2W	E27	12	WW	Ø 65 × 118	225
HLB-WHT-LPRMD4K14B2C	B22	14	CW	Ø 65 × 126	250
HLB-WHT-LPRMD4K14B2W	B22	14	WW	Ø 65 × 126	250
HLB-WHT-LPRMD4K14E2C	E27	14	CW	Ø 65 × 126	250
HLB-WHT-LPRMD4K14E2W	E27	14	WW	Ø 65 × 126	250
HLB-WHT-LPRMD4K20B2C	B22	20	CW	Ø 80 × 152	325
HLB-WHT-LPRMD4K20B2W	B22	20	WW	Ø 80 × 152	325
HLB-WHT-LPRMD4K20E2C	E27	20	CW	Ø 80 × 152	325
HLB-WHT-LPRMD4K20E2W	E27	20	WW	Ø 80 × 152	325



Technical data:

- Full globe diffuser for wide distribution of light
- Input voltage range: 140 V -270 V AC
- Luminous efficacy: 105 Lm/W
- Power factor: >0.95
- Housing material: Overmoulded PC



Night Lamps (0.5 W)

Item Code	Base Cap	Wattage (W)	CCT (K)	Dimension in MM (DXH)	MRP
HLB-WHT-LPRM01R001XC	B22	0.5	CW	Ø 45 × 70	50
HLB-WHT-LPRM01R001XY	B22	0.5	YELLOW	Ø 45 × 70	50
HLB-WHT-LPRM01R001XR	B22	0.5	RED	Ø 45 × 70	50
HLB-WHT-LPRM01R001XG	B22	0.5	GREEN	Ø 45 × 70	50
HLB-WHT-LPRM01R001XB	B22	0.5	BLUE	Ø 45 × 70	50
HLB-WHT-LPRM01R001XO	B22	0.5	ORANGE	Ø 45 × 70	50
HLB-WHT-LPRM01R001XP	B22	0.5	PINK	Ø 45 × 70	50



Technical data:

- Input voltage range: 140 V -270 V AC
- Luminous efficacy: >40 Lm/W
- Housing material: Polycarbonate

Janus

Item Code	Wattage (W)	CCT (K)	Dimension in MM (W X H)	MRP
STH-WHT-LJNS02S012XC	24	CW	8 × 2.25	630
STH-WHT-LJNS02S012XN	24	NW	8 × 2.25	630
STH-WHT-LJNS02S012XW	24	WW	8 × 2.25	630
STH-WHT-LJNS02S012XR	24	Red	8 × 2.25	630
STH-WHT-LJNS02S012XG	24	Green	8 × 2.25	630
STH-WHT-LJNS02S012XB	24	Blue	8 × 2.25	630

Technical data:

- Input voltage range: 12 V DC (with adapter)
- Luminous efficacy: >90 Lm / W
- Roll: 5 meter with cut points
- No. of LEDs: 60 LEDs / meter



Strip Driver

Item Code	Voltage (V)	Current (A)	MRP
LSTD02A012V	12 DC	2	585



Technical data:

- Easy to install
- IP65 LED Rope Light
- Long lasting and bright light to make your home, factory, and office bright and stylish
- Can be used in POP Cove
- Rated input voltage-220-240 V AC
- Dazzle-free soft light
- Very easy to decorate patterns, designs and characters
- Low power consumption, safe and reliable

Product specifications:

- Options: 60 LED/meter & 120 LED/meter
- Length: 45 meter/roll
- CRI: ≥80
- Available Colours: CW / WW / Red / Green Blue / Ice Blue / Amber

Rope Light

Item Code	LED/MTR.	CCT (K)	Dimension	MRP
STH-WHT-LJNP01S060XC	60	CW	45m/Roll	5,100
STH-WHT-LJNP01S060XW	60	WW	45m/Roll	5,100
STH-WHT-LJNP01S060XR	60	RED	45m/Roll	5,100
STH-WHT-LJNP01S060XG	60	GREEN	45m/Roll	5,100
STH-WHT-LJNP01S060XB	60	BLUE	45m/Roll	5,100
STH-WHT-LJNP01S060XI	60	ICE BLUE	45m/Roll	5,100
STH-WHT-LJNP01S060XA	60	AMBER	45m/Roll	5,100
STH-WHT-LJNP01S120XC	120	CW	45m/Roll	7,000
STH-WHT-LJNP01S120XW	120	WW	45m/Roll	7,000
STH-WHT-LJNP01S120XR	120	RED	45m/Roll	7,000
STH-WHT-LJNP01S120XG	120	GREEN	45m/Roll	7,000
STH-WHT-LJNP01S120XB	120	BLUE	45m/Roll	7,000
STH-WHT-LJNP01S120XI	120	ICE BLUE	45m/Roll	7,000
STH-WHT-LJNP01S120XA	120	AMBER	45m/Roll	7,000
STH-WHT-LJNP18S120XT	120	TRI-COLOUR	18m/Roll	3,075
STH-WHT-LJNP18S120XW	120	WW	18m/Roll	3,075
STH-WHT-LJPMACD01S45	-	-	-	325



Pro-active customer care

Even peers vouch for Jaquar's enviable customer care.

Backed by over 1,000 trained technicians and a warranty on its products, Jaquar lighting provides India's most reliable service to its customers with a fully integrated service network across the country.

Toll-free customer care no: 1800 212 6808

E-mail: ccare.lighting@jaquar.com



 ***Global Headquarters***
Net Zero Energy Building spread over 48,000 sq. mtrs.

Conceived back in 1960, the Jaquar Group has been built on the platform of the highest quality standards, aesthetics and the intent of providing world-class products. Today, the Jaquar Group caters to luxury, premium and value bathroom segments with Artize, Jaquar & Essco brands, respectively, for residential and commercial sectors across the globe. The group's lighting division, Jaquar Lighting too, has been setting new parameters of excellence while witnessing unprecedented success.

Artize

It pays tribute to the fine traditions of exquisite craftsmanship and precision where design, technology and talent combine to deliver a masterpiece. Artize products are crafted for luxurious bath spaces. Perfect harmony is the very essence of Artize- together as coordinates or even as individual pieces. Artize's exquisite craftsmanship is so stunning that it can inspire the design principles of not just your bath spaces but of your entire living spaces.



A leading global super brand known for its excellence in innovation and technology. The highest build standards combine with the most beautifully designed aesthetics to provide world-class products for tough conditions. With a superb blend of ergonomic shapes, contemporary styles and meticulous finish, Jaquar continues to enthrall millions of hearts across the world with its wide range of concepts and products.



For over 6 decades, 'Essco' the bathroom brand has been the benchmark for the organised bath industry in India. Essco defines base quality standards in India. A great value-for-money bath brand, Essco pioneered the concept of branded bath fittings in India, and is today one of the most respected names in the market, fulfilling a common man's ambition of a better quality of life through true quality, better hygiene, affordable pricing, trusted customer service & a 10-year warranty promise.

Looking for
Jaquar Lighting Products?

**CALL
PURCHASE ASSISTANCE**

1800-120-332222
(Toll Free)

And we'll make it easy!

Speak to our Lighting Experts, who will suggest the right product that you should go in for and where to buy it from.



KNOW MORE



Website



Whatsapp