


SHIVAY


SENSOR



Model S 615

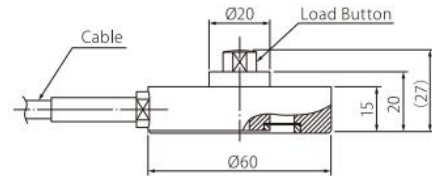

4 x M4
Equal 90° divisions with this position
as the reference point

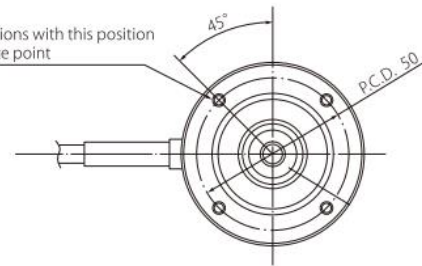

SPECIFICATION

Capacity (kgf)	20,30,50,100,200, 300, 500, 750, 1000		
Precision	C2/C3	Output Impedance(Ω)	350 ± 5
Composition Error	0.03/0.02	Insulation ($M\Omega$)	≥ 2000
Rated Output(mv/v)	2.0 ± 0.2	Excitation Voltage(V)	5~10(DC)
Non-Linearity (%FS)	0.025	Compensated Temp.($^{\circ}C$)	-10~+50
Hysteresis (%FS)	0.02	Use Temp. ($^{\circ}C$)	-20~+60
Repeatability (%FS)	0.02/0.01	Temp. Effect on Span(%FS)	0.02
Creep (%FS)	0.03/0.02	Temp. Effect on Zero(%FS)	0.02
Zero Balance (%FS)	± 1.0	Safe Overload(%FS)	120
Input Impedance(Ω)	350 ± 50	Ultimate Overload(%FS)	150



www.shivaysensor.com

