




## ○ PNEUMATIC ROLLING DRIVES

- FULL ALUMINIUM BODY – SO LIGHT IN WEIGHT
- ERGONOMICALLY PERFECT PUSH / PULL THROTTLE
- PRECISELY CONTROLLED TORQUE OUTPUT
- DRIVE STOPS AUTOMATICALLY AFTER ACHIEVING THE SET LOAD

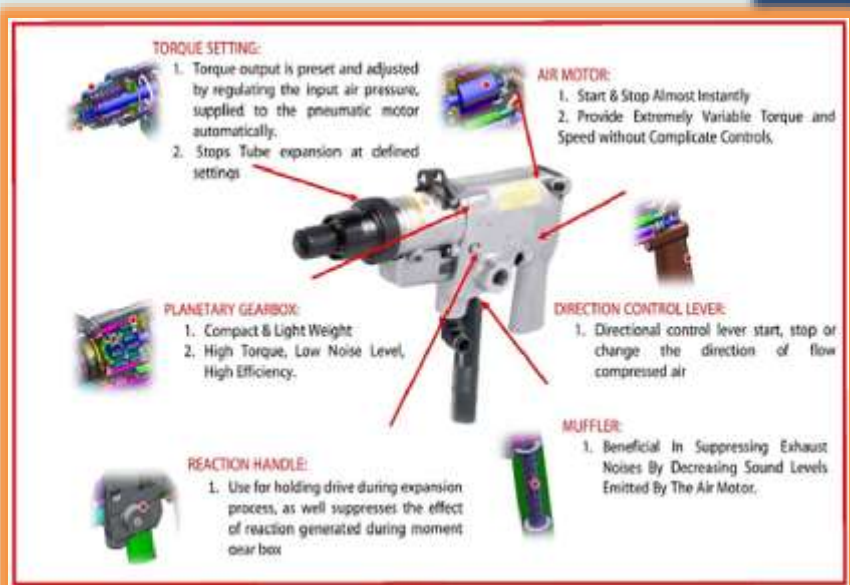

*Areas where sparking tools are not allowed, Pneumatic Rolling Drives are the best choice for tube expansion. Its precise tripping mechanism makes it a highly accurate tool for tube expansion.*

MODEL	Free Speed	Min. Torque	Max. Torque	Tube Capacity	Air Consumption	Net Weight
	rpm	Nm	Nm	inch	L/min.	Kg.
SPRD - 1250	1250	1.58	12.20	3/4"	1700	4.8
SPRD - 600	600	2.49	21.81	1"	1700	4.8
SPRD - 400	400	5.00	36.00	1 1/4"	1700	4.8

**Works:** No. 3, First Floor, Shree Siddhivinayak Commercial Complex, Plot No. 26, Sector – 10, Airoli, Navi Mumbai – 400 708

**Phone:** 022 – 27691590

**E-mail:** [siepl@sapsonsindia.com](mailto:siepl@sapsonsindia.com)

**Delhi Office:** G-80/B, Basement, Kalkaji, New Delhi – 110 019

Phone # 011 – 4160 4150

Fax # 011 – 4160 4140

E-mail: [info@sapsonsindia.com](mailto:info@sapsonsindia.com)