



REDINFRA SYSTEMS PVT. LTD.



FINGER
PROTECTION



HAND
PROTECTION



BODY
PROTECTION



INFRA BROCHURE




Automating Your Success

Red Infra Systems Pvt. Ltd. (India) is a leading manufacturer and developer of infrared technology & industrial automation products in India since from 2004. Its products find wide application in multiple sectors such as manufacturing, construction, energy efficiency etc.


With our in-house research & development facilities, we are able to customize our products to meet specific client requirements, enhancing value addition & cost effectiveness across multiple operational areas.

Our pan India sales & Service network ensures reliable support for all your needs.





INFRA Safety Light Curtain Without Communication (NPN/PNP connection)

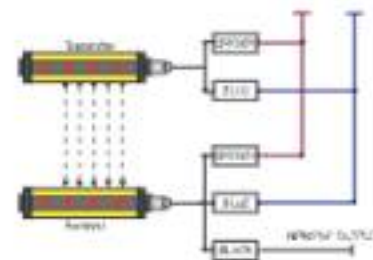

INFRA Safety Light Curtain Without Communication (NPN/PNP connection)

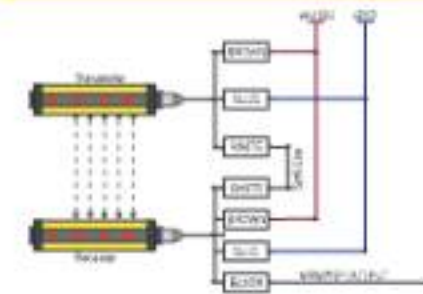

INFRA Safety Light Curtain Without Communication (NPN/PNP connection)

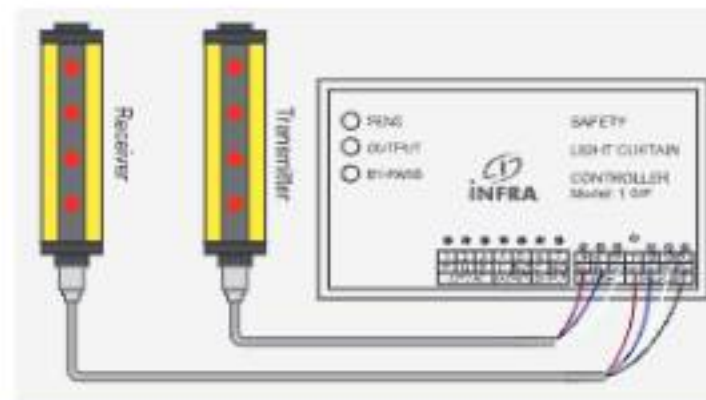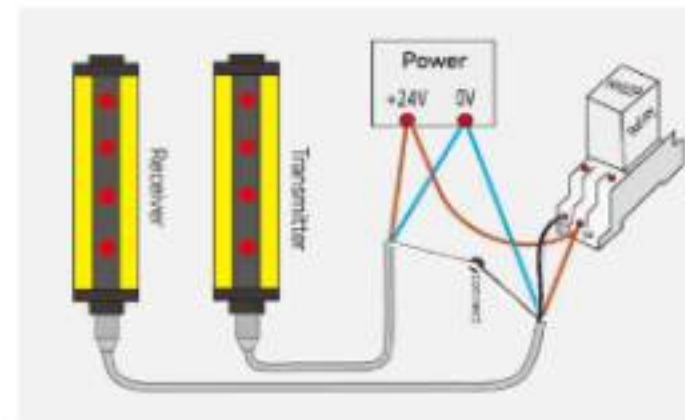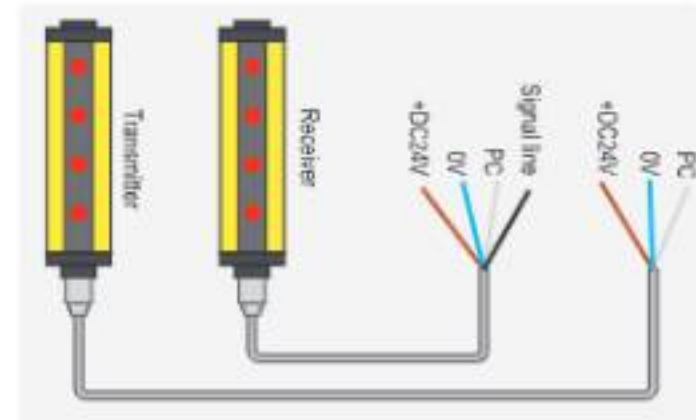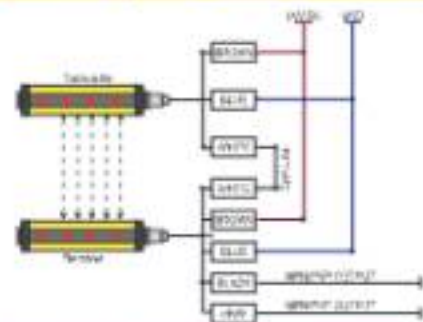


Diffuse Reflection Detection Safety Light Curtains



PRODUCT WIRING METHOD

WPN wiring method

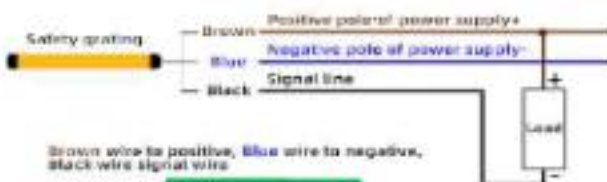

WPN wiring method



Brown wire to positive, Blue wire to negative, Black wire signal wire

Brown wire to positive, Blue wire to negative, Black wire signal wire


TECHNICAL PARAMETER

No. of beams	Customize
Pitch	20,30,40
power supply	12-24 V DC
supply protection	Revers. Polarity Protection
output	PNP/NPN/NO/NC
output indication	LED
beam type	Equal & Cross beam reflection
Response time	≤ 15 MS sec
Housing	Aluminium Body
slim size	50x35 mm
Adjustable Range	0 to 1000mm
Cable	2000 mm
Operation Temperature	0 to 55
Protection class	IP 65

- * The first domestically produced diffuse reflection grating with built-in single turn adjustable knob
- * Stable and reliable, with low attenuation of detected objects
- * Only conduct area detection without safety protection
- * Internal self check, LED indicator light and fault light
- * Integrated transmission and reception, saving installation space
- * Ultra long adjustable detection distance, up to 1000mm
- * The default output line is 2 meters, which can achieve shielding output, and the number of light points supports customization

3

Fiber Optical Safety Light Curtains

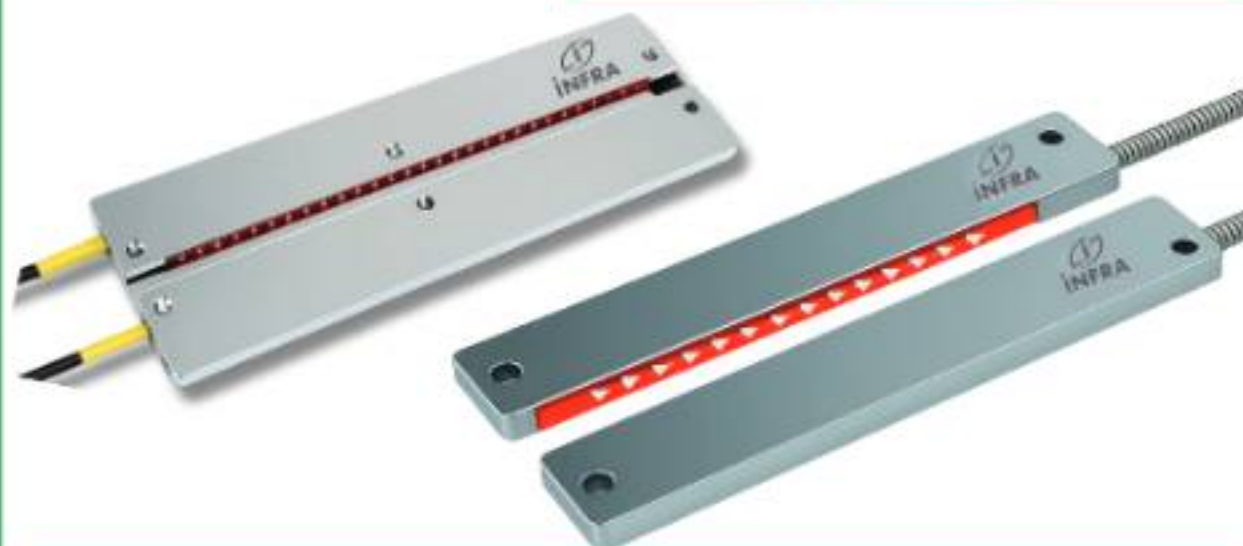


Fiber Optical Safety Light Curtains



Sr. No.	Model no	Pitch (mm)	No Of Beams	Slim Size	Overall Height (mm)	Protection Height(mm)
1	MJ8GQ-100	3	32	18 x 6 mm	120	100
2	MJ8GQ-150	5	32	18 x 8 mm	170	150
3	MJ8GQ-200	6	32	18 x 8 mm	220	200

Technical Parameter

Power Supply	12-24 V DC
Supply Protection	Revers Polarity Protection
Output	PNP/NPN/NO/NC
Output Indication	Through LED
Channel Indication	LED Indication For Each Channel
Response time	≤ 120 Micro sec
Housing	Aluminium Body
Adjustable range	0 to 1300 mm
Std Fiber Optical Cable	2000 mm
Operating Temperature	0 to 55
Protection Class	IP 65

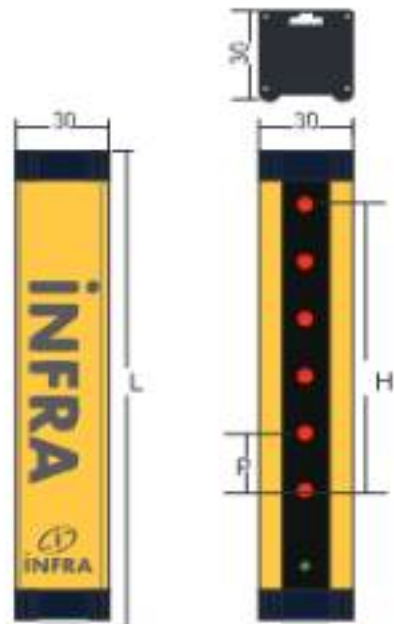

L = Overall Height
H = Protective Height
P = Pitch

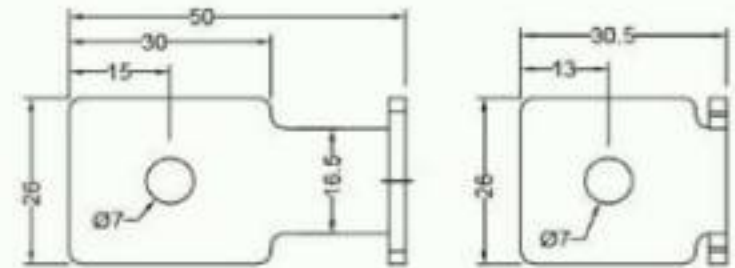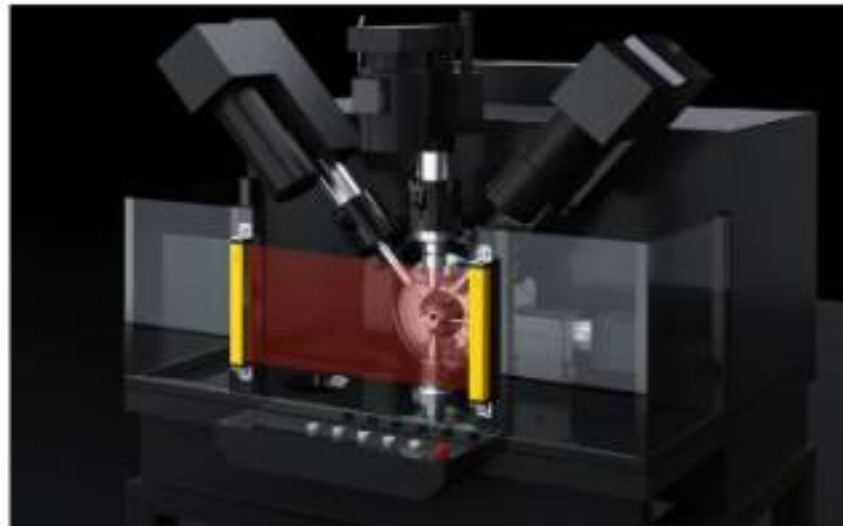

◆ TECHNICAL PARAMETER ◆

Protection Height	60-1150mm (Universal)	Ambient Operating Temperature	-10~55°C
Beam Gap	20/30/40mm	Ambient Operating Humidity	When Temperature is 20°C Humidity Max<95%
Resolution	25/35/45mm	Insulation Resistance	≥100MΩ
Beams	4, 6, 8, 10, 12.....	Output Current	≥200MA
Voltage	DC10-DC32V	Power	<5W
Response Time	<5ms	Anti-Optical Interface	Incidence Angle>5°
Housing Cross-Section	30x30mm	Dielectric Strength	No breakdown or flicker
Protective Distance	05.5m,10,10m	Light Curtain form	Through-Beam
Output Signal	PNP/NPN	Protection Class	IP65

◆ PACKAGING ACCESSORIES ◆

Picture	Item	Length	QTY	Factory Settings
	Receiver	Depends on model	1ste	yes
	Transmitter	Depends on model	1ste	yes
	Transmitter signal cable	3m	1pcs	yes
	Receiver signal cable	5m	1pcs	yes
	Mounting clamp	/	4 pcs	yes

FINGER PROTECTION


Model No	No. of Beams	Protection Height in "mm"	Overall Height in "mm"	Pitch
SLC-T4-30-0620-02	6	100	165	20
SLC-T4-30-0820-02	8	140	205	20
SLC-T4-30-1020-02	10	180	245	20
SLC-T4-30-1220-02	12	220	285	20
SLC-T4-30-1420-02	14	260	325	20
SLC-T4-30-1620-02	16	300	365	20
SLC-T4-30-1820-02	18	340	405	20
SLC-T4-30-2020-02	20	380	445	20
SLC-T4-30-2220-02	22	420	485	20
SLC-T4-30-2420-02	24	460	525	20
SLC-T4-30-2620-02	26	500	465	20
SLC-T4-30-2820-02	28	540	605	20
SLC-T4-30-3020-02	30	580	645	20
SLC-T4-30-3220-02	32	620	685	20
SLC-T4-30-3420-02	34	660	725	20
SLC-T4-30-3620-02	36	700	765	20
SLC-T4-30-3820-02	38	740	805	20
SLC-T4-30-4020-02	40	780	845	20
SLC-T4-30-4220-02	42	820	885	20
SLC-T4-30-4420-02	44	860	925	20
SLC-T4-30-4620-02	46	900	965	20
SLC-T4-30-4820-02	48	940	1005	20
SLC-T4-30-5020-02	50	980	1045	20
SLC-T4-30-5220-02	52	1020	1085	20
SLC-T4-30-5420-02	54	1060	1125	20
SLC-T4-30-5620-02	56	1100	1165	20
SLC-T4-30-5820-02	58	1140	1205	20
SLC-T4-30-6020-02	60	1180	1245	20

HAND PROTECTION

Model No	No. of Beams	Protection Height in "mm"	Overall Height in "mm"	Pitch
SLC-T4-30-0630-02	6	150	215	30
SLC-T4-30-0830-02	8	210	275	30
SLC-T4-30-1030-02	10	270	335	30
SLC-T4-30-1230-02	12	330	395	30
SLC-T4-30-1430-02	14	390	455	30
SLC-T4-30-1630-02	16	450	515	30
SLC-T4-30-1830-02	18	510	575	30
SLC-T4-30-2030-02	20	570	635	30
SLC-T4-30-2230-02	22	630	695	30
SLC-T4-30-2430-02	24	690	755	30
SLC-T4-30-2630-02	26	750	815	30
SLC-T4-30-2830-02	28	810	875	30
SLC-T4-30-3030-02	30	870	935	30
SLC-T4-30-3230-02	32	930	995	30
SLC-T4-30-3430-02	34	990	1055	30
SLC-T4-30-3630-02	36	1050	1115	30
SLC-T4-30-3830-02	38	1110	1175	30
SLC-T4-30-4030-02	40	1170	1235	30
SLC-T4-30-4230-02	42	1230	1295	30
SLC-T4-30-4430-02	44	1290	1355	30
SLC-T4-30-4630-02	46	1350	1415	30
SLC-T4-30-4830-02	48	1410	1475	30
SLC-T4-30-5030-02	50	1470	1535	30
SLC-T4-30-5230-02	52	1530	1595	30
SLC-T4-30-5430-02	54	1590	1655	30
SLC-T4-30-5630-02	56	1650	1715	30
SLC-T4-30-5830-02	58	1710	1775	30
SLC-T4-30-6030-02	60	1770	1835	30

BODY PROTECTION

Model No	No. of Beams	Protection Height in "mm"	Overall Height in "mm"	Pitch
SLC-T4-30-0640-02	6	200	265	40
SLC-T4-30-0840-02	8	280	345	40
SLC-T4-30-1040-02	10	360	425	40
SLC-T4-30-1240-02	12	440	505	40
SLC-T4-30-1440-02	14	520	585	40
SLC-T4-30-1640-02	16	600	665	40
SLC-T4-30-1840-02	18	680	745	40
SLC-T4-30-2040-02	20	760	825	40
SLC-T4-30-2240-02	22	840	905	40
SLC-T4-30-2440-02	24	920	985	40
SLC-T4-30-2640-02	26	1000	1065	40
SLC-T4-30-2840-02	28	1080	1145	40
SLC-T4-30-3040-02	30	1160	1225	40
SLC-T4-30-3240-02	32	1240	1305	40
SLC-T4-30-3440-02	34	1320	1385	40
SLC-T4-30-3640-02	36	1400	1465	40
SLC-T4-30-3840-02	38	1480	1545	40
SLC-T4-30-4040-02	40	1560	1625	40
SLC-T4-30-4240-02	42	1640	1705	40
SLC-T4-30-4440-02	44	1720	1785	40
SLC-T4-30-4640-02	46	1800	1865	40
SLC-T4-30-4840-02	48	1880	1945	40
SLC-T4-30-5040-02	50	1960	2025	40
SLC-T4-30-5240-02	52	2040	2105	40
SLC-T4-30-5440-02	54	2120	2185	40
SLC-T4-30-5640-02	56	2200	2265	40
SLC-T4-30-5840-02	58	2280	2345	40
SLC-T4-30-6040-02	60	2360	2425	40

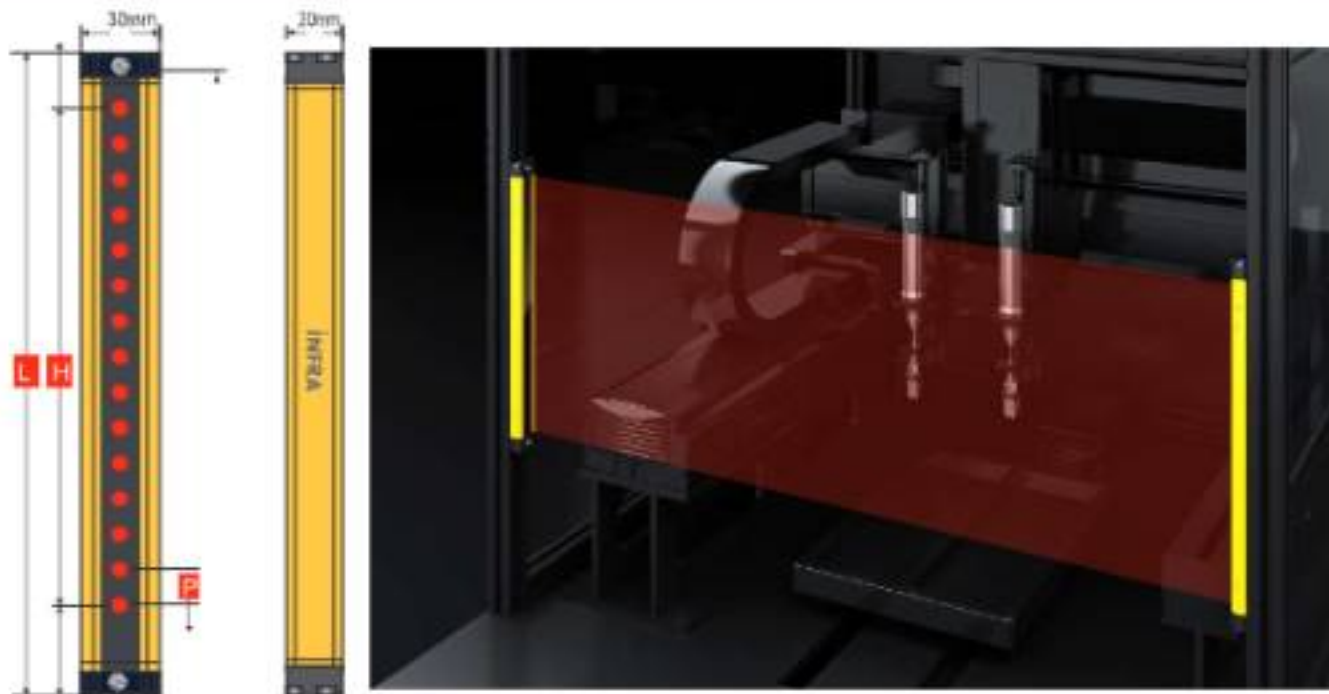

L = Overall Height
H = Protective Height
P = Pitch

◆ TECHNICAL PARAMETER ◆

Protection Height	60-1150mm (Universal)	Ambient Operating Temperature	-10~55°C
Beam Gap	20/30/40mm	Ambient Operating Humidity	When Temperature is 20°C Humidity Max<95%
Resolution	25/35/45mm	Insulation Resistance	≥100MΩ
Beams	4, 6, 8, 10, 12.....	Output Current	≥200MA
Voltage	DC10-DC32V	Power	<5W
Response Time	<5ms	Anti-Optical Interface	Incidence Angle>5°
Housing Cross-Section	30x30mm	Dielectric Strength	No breakdown or flicker
Protective Distance	05.5m,10,10m	Light Curtain form	Through-Beam
Output Signal	PNP/NPN	Protection Class	IP65



◆ PACKAGING ACCESSORIES ◆

Picture	Item	Length	QTY	Factory Settings
	Receiver	Depends on model	1ste	yes
	Transmitter	Depends on model	1ste	yes
	Transmitter signal cable	3m	1pcs	yes
	Receiver signal cable	5m	1pcs	yes
	screw	/	2 pcs	yes

FINGER PROTECTION


Model No	No. of Beams	Protection Height in "mm"	Overall Height in "mm"	Pitch
SLC-T4-20-0620-02	6	100	165	20
SLC-T4-20-0820-02	8	140	205	20
SLC-T4-20-1020-02	10	180	245	20
SLC-T4-20-1220-02	12	220	285	20
SLC-T4-20-1420-02	14	260	325	20
SLC-T4-20-1620-02	16	300	365	20
SLC-T4-20-1820-02	18	340	405	20
SLC-T4-20-2020-02	20	380	445	20
SLC-T4-20-2220-02	22	420	485	20
SLC-T4-20-2420-02	24	460	525	20
SLC-T4-20-2620-02	26	500	465	20
SLC-T4-20-2820-02	28	540	605	20
SLC-T4-20-3020-02	30	580	645	20
SLC-T4-20-3220-02	32	620	685	20
SLC-T4-20-3420-02	34	660	725	20
SLC-T4-20-3620-02	36	700	765	20
SLC-T4-20-3820-02	38	740	805	20
SLC-T4-20-4020-02	40	780	845	20
SLC-T4-20-4220-02	42	820	885	20
SLC-T4-20-4420-02	44	860	925	20
SLC-T4-20-4620-02	46	900	965	20
SLC-T4-20-4820-02	48	940	1005	20
SLC-T4-20-5020-02	50	980	1045	20
SLC-T4-20-5220-02	52	1020	1085	20
SLC-T4-20-5420-02	54	1060	1125	20
SLC-T4-20-5620-02	56	1100	1165	20
SLC-T4-20-5820-02	58	1140	1205	20
SLC-T4-20-6020-02	60	1180	1245	20

HAND PROTECTION

Model No	No. of Beams	Protection Height in "mm"	Overall Height in "mm"	Pitch
SLC-T4-20-0620-02	6	150	215	30
SLC-T4-20-0820-02	8	210	275	30
SLC-T4-20-1020-02	10	270	335	30
SLC-T4-20-1220-02	12	330	395	30
SLC-T4-20-1420-02	14	390	455	30
SLC-T4-20-1620-02	16	450	515	30
SLC-T4-20-1820-02	18	510	575	30
SLC-T4-20-2020-02	20	570	635	30
SLC-T4-20-2220-02	22	630	695	30
SLC-T4-20-2420-02	24	690	755	30
SLC-T4-20-2620-02	26	750	815	30
SLC-T4-20-2820-02	28	810	875	30
SLC-T4-20-3020-02	30	870	935	30
SLC-T4-20-3220-02	32	930	995	30
SLC-T4-20-3420-02	34	990	1055	30
SLC-T4-20-3620-02	36	1050	1115	30
SLC-T4-20-3820-02	38	1110	1175	30
SLC-T4-20-4020-02	40	1170	1235	30
SLC-T4-20-4220-02	42	1230	1295	30
SLC-T4-20-4420-02	44	1290	1355	30
SLC-T4-20-4620-02	46	1350	1415	30
SLC-T4-20-4820-02	48	1410	1475	30
SLC-T4-20-5020-02	50	1470	1535	30
SLC-T4-20-5220-02	52	1530	1595	30
SLC-T4-20-5420-02	54	1590	1655	30
SLC-T4-20-5620-02	56	1650	1715	30
SLC-T4-20-5820-02	58	1710	1775	30
SLC-T4-20-6020-02	60	1770	1835	30

BODY PROTECTION


Model No	No. of Beams	Protection Height in "mm"	Overall Height in "mm"	Pitch
SLC-T4-20-0640-02	6	200	265	40
SLC-T4-20-0840-02	8	280	345	40
SLC-T4-20-1040-02	10	360	425	40
SLC-T4-20-1240-02	12	440	505	40
SLC-T4-20-1440-02	14	520	585	40
SLC-T4-20-1640-02	16	600	665	40
SLC-T4-20-1840-02	18	680	745	40
SLC-T4-20-2040-02	20	760	825	40
SLC-T4-20-2240-02	22	840	905	40
SLC-T4-20-2440-02	24	920	985	40
SLC-T4-20-2640-02	26	1000	1065	40
SLC-T4-20-2840-02	28	1080	1145	40
SLC-T4-20-3040-02	30	1160	1225	40
SLC-T4-20-3240-02	32	1240	1305	40
SLC-T4-20-3440-02	34	1320	1385	40
SLC-T4-20-3640-02	36	1400	1465	40
SLC-T4-20-3840-02	38	1480	1545	40
SLC-T4-20-4040-02	40	1560	1625	40
SLC-T4-20-4240-02	42	1640	1705	40
SLC-T4-20-4440-02	44	1720	1785	40
SLC-T4-20-4640-02	46	1800	1865	40
SLC-T4-20-4840-02	48	1880	1945	40
SLC-T4-20-5040-02	50	1960	2025	40
SLC-T4-20-5240-02	52	2040	2105	40
SLC-T4-20-5440-02	54	2120	2185	40
SLC-T4-20-5640-02	56	2200	2265	40
SLC-T4-20-5840-02	58	2280	2345	40
SLC-T4-20-6040-02	60	2360	2425	40

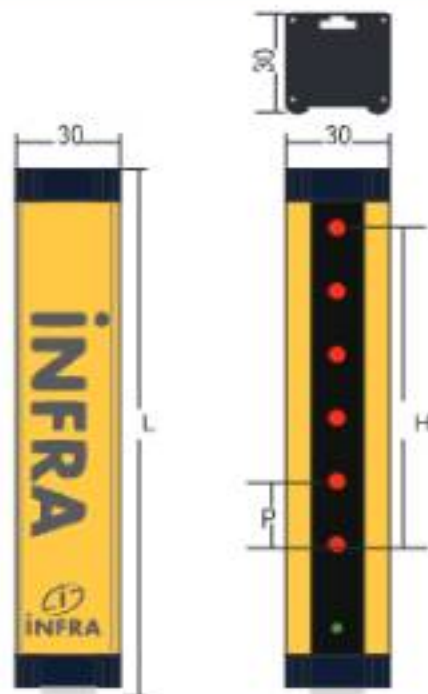

L= Overall Height
H=Protective Height
P=Pitch



Type : Parallel Beam
No of Beams : 6 nos
Active Beams : 6 nos



Type : Cross Beam
No of Beams : 6 nos
Active Beams : 16 nos

Power Supply	12-24 Volts DC
Supply Protection	Reverse Polarity Protected
Output	Single/ dual Output (PNP or NPN / NO or NC)
Output Indications	Through Leds
Channel Indication	Led Indication For Each Channel
Response Time	On To Off: 10 - 15 M Sec. Off To On : 50 - 100 M Sec
No. Of Beams	6, 10, 12, 16, 18, 24, 30, 36, 40, 48, 54, 60
Beam By Pass	Provided To Fingerhand/body Protection Models
Protected Heights	100-3000 In mm.
Pitch Offered	20, 30, 40, 50 In mm
Adjustable Range	Up To 3 Meters (higher Range Up To 5, 10, 15, 20 Meters Available)
Standard Cable Length	5 Meters For Emitter, 3 Meters For Receiver
Operating Temperature	Up To 55°c
Cross Section	30x30x(L)
Electrical Connections	Plug In Connector For Emitter & Receiver
Applicable To	Directly Work With Plcs / Controllers
Protections	Output Short Circuit Protected
Suitable For	Machines With Quick Emergency Stop


- Easy to install & can be mounted in any position. Vertical / Horizontal.
- Non Critical alignment between Emitter & Receiver.
- Blanking / By-Passing individual channel is provided through software.
- System operation is unaffected by mains power fluctuations.
- Machine OFF if screen is too dirty or oily.
- Barrier operates on cyclic scanning photo-electric infra-red techniques.
- Various barrier heights are available for covering 90 mm to 1890 mm.
- Higher covering heights available upon request.
- Use of solid state components & special construction technique ensures that barrier is not affected by normal vibrations & shocks.
- Sensor connections are provided through plug in connectors.
- Self Checking Circuitry with two outputs continuously monitors failure of any of the beam in the system and stop the machine if failure is detected.
- LED Indications are provided for status indication of each channel.
- LED indications are also provided for each output.
- Choice for suitable Control Unit available as per different working conditions.
- Flexible fixing arrangements to suit individual requirement.
- Increases productivity while maintaining required safety.

FINGER PROTECTION

HAND PROTECTION

BODY PROTECTION

Parallel Beam (SLC Model)	Protected Height	Overall Height	Pitch	Cross Beam (SLX Model)	
MODEL NO	Beam's	In "mm"	"mm"	MODEL NO	Beam's
SLC-FF-30-0420	4	90	30	SLX-FF-30-0420	10
SLC-FF-30-0620	6	100	125	SLX-FF-30-0620	18
SLC-FF-30-1220	12	220	240	SLX-FF-30-1220	34
SLC-FF-30-1820	18	340	350	SLX-FF-30-1820	52
SLC-FF-30-2020	20	380	400	SLX-FF-30-2020	58
SLC-FF-30-2420	24	450	480	SLX-FF-30-2420	70
SLC-FF-30-3020	30	580	600	SLX-FF-30-3020	88
SLC-FF-30-3620	36	700	720	SLX-FF-30-3620	106
SLC-FF-30-0430	4	90	125	SLX-FF-30-0430	10
SLC-FF-30-0630	6	150	180	SLX-FF-30-0630	18
SLC-FF-30-1230	12	340	360	SLX-FF-30-1230	34
SLC-FF-30-1830	18	510	540	SLX-FF-30-1830	52
SLC-FF-30-2030	20	570	600	SLX-FF-30-2030	58
SLC-FF-30-2430	24	690	720	SLX-FF-30-2430	70
SLC-FF-30-3030	30	870	900	SLX-FF-30-3030	88
SLC-FF-30-3630	36	1050	1080	SLX-FF-30-3630	106
SLC-FF-30-0440	4	120	160	SLX-FF-30-0440	10
SLC-FF-30-0640	6	200	240	SLX-FF-30-0640	18
SLC-FF-30-1240	12	440	480	SLX-FF-30-1240	34
SLC-FF-30-1840	18	690	720	SLX-FF-30-1840	52
SLC-FF-30-2040	20	780	800	SLX-FF-30-2040	58
SLC-FF-30-2440	24	920	960	SLX-FF-30-2440	70
SLC-FF-30-3040	30	1140	1200	SLX-FF-30-3040	88
SLC-FF-30-3640	36	1400	1440	SLX-FF-30-3640	106
SLC-FF-30-1020	10	180	200	SLX-FF-30-1020	28
SLC-FF-30-1030	10	270	300	SLX-FF-30-1030	28
SLC-FF-30-1040	10	360	400	SLX-FF-30-1040	28
SLC-FF-30-1050	10	450	500	SLX-FF-30-1050	28
SLC-FF-30-1060	10	450	480	SLX-FF-30-1060	40
SLC-FF-30-1040	10	600	640	SLX-FF-30-1040	46
SLC-FF-30-0450	4	150	200	SLX-FF-30-0450	10
SLC-FF-30-0650	6	250	300	SLX-FF-30-0650	18
SLC-FF-30-1250	12	550	600	SLX-FF-30-1250	34
SLC-FF-30-1850	18	750	800	SLX-FF-30-1850	54
SLC-FF-30-2050	18	850	900	SLX-FF-30-2050	54
SLC-FF-30-2050	20	950	1000	SLX-FF-30-2050	58
SLC-FF-30-2150	24	1150	1200	SLX-FF-30-2150	70
SLC-FF-30-3050	30	1450	1500	SLX-FF-30-3050	88
SLC-FF-30-3050	30	2150	2300	SLX-FF-30-3050	108
SLC-FF-30-3050	48	2350	2400	SLX-FF-30-3050	142
SLC-FF-30-5050	54	3050	3200	SLX-FF-30-5050	180

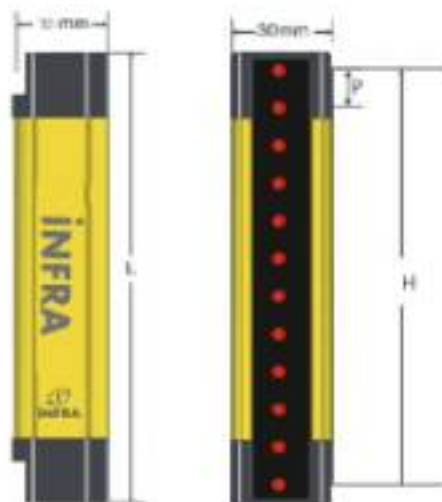

L= Overall Height
H=Protective Height
P=Pitch



Type : Parallel Beam
No of Beams : 6 nos
Active Beams : 6 nos



Type : Cross Beam
No of Beams : 6 nos
Active Beams : 16 nos

Power Supply	12-24 Volts DC
Supply Protection	Reverse Polarity Protected
Output	Single/ dual Output (PNP or NPN / NO or NC)
Output Indications	Through Leds
Channel Indication	Led Indication For Each Channel
Response Time	On To Off: 10 - 15 M Sec. Off To On : 50 - 100 M Sec
No. Of Beams	6, 10, 12, 16, 18, 24, 30, 36, 40, 48, 54, 60
Beam By Pass	Provided To Fingerhand/body Protection Models
Protected Heights	100-3000 In mm.
Pitch Offered	20, 30, 40, 50 In mm
Adjustable Range	Up To 3 Meters (higher Range Up To 5, 10, 15, 20 Meters Available)
Standard Cable Length	5 Meters For Emitter, 3 Meters For Receiver
Operating Temperature	Up To 55°c
Cross Section	30x30x(L)
Electrical Connections	Plug In Connector For Emitter & Receiver
Applicable To	Directly Work With Plcs / Controllers
Protections	Output Short Circuit Protected
Suitable For	Machines With Quick Emergency Stop

- Easy to install & can be mounted in any position. Vertical / Horizontal.
- Non Critical alignment between Emitter & Receiver.
- Blanking / By-Passing individual channel is provided through software.
- System operation is unaffected by mains power fluctuations.
- Machine OFF if screen is too dirty or oily.
- Barrier operates on cyclic scanning photo-electric infra-red techniques.
- Various barrier heights are available for covering 90 mm to 1890 mm.
- Higher covering heights available upon request.
- Use of solid state components & special construction technique ensures that barrier is not affected by normal vibrations & shocks.
- Sensor connections are provided through plug in connectors.
- Self Checking Circuitry with two outputs continuously monitors failure of any of the beam in the system and stop the machine if failure is detected.
- LED Indications are provided for status indication of each channel.
- LED indications are also provided for each output.
- Choice for suitable Control Unit available as per different working conditions.
- Flexible fixing arrangements to suit individual requirement.
- Increases productivity while maintaining required safety.

FINGER PROTECTION

HAND PROTECTION


BODY PROTECTION

Parallel Beam (SLC Model)	Protected Height	Overall Height	Pitch	Cross Beam (SLX Model)	
MODEL NO	Beam's	In "mm"	"mm"	MODEL NO	Beam's
SLC-FF-30-0420	4	90	30	SLX-FF-30-0420	10
SLC-FF-30-0620	6	100	125	SLX-FF-30-0620	18
SLC-FF-30-1220	12	220	240	SLX-FF-30-1220	34
SLC-FF-30-1820	18	340	350	SLX-FF-30-1820	52
SLC-FF-30-2020	20	380	400	SLX-FF-30-2020	58
SLC-FF-30-2420	24	450	480	SLX-FF-30-2420	70
SLC-FF-30-3020	30	580	600	SLX-FF-30-3020	88
SLC-FF-30-3620	36	700	720	SLX-FF-30-3620	106
SLC-FF-30-0430	4	90	125	SLX-FF-30-0430	10
SLC-FF-30-0630	6	150	180	SLX-FF-30-0630	18
SLC-FF-30-1230	12	340	360	SLX-FF-30-1230	34
SLC-FF-30-1830	18	510	540	SLX-FF-30-1830	52
SLC-FF-30-2030	20	570	600	SLX-FF-30-2030	58
SLC-FF-30-2430	24	690	720	SLX-FF-30-2430	70
SLC-FF-30-3030	30	870	900	SLX-FF-30-3030	88
SLC-FF-30-3630	36	1050	1080	SLX-FF-30-3630	106
SLC-FF-30-0440	4	120	160	SLX-FF-30-0440	10
SLC-FF-30-0640	6	200	240	SLX-FF-30-0640	18
SLC-FF-30-1240	12	440	480	SLX-FF-30-1240	34
SLC-FF-30-1840	18	690	720	SLX-FF-30-1840	52
SLC-FF-30-2040	20	780	800	SLX-FF-30-2040	58
SLC-FF-30-2440	24	920	960	SLX-FF-30-2440	70
SLC-FF-30-3040	30	1140	1200	SLX-FF-30-3040	88
SLC-FF-30-3640	36	1400	1440	SLX-FF-30-3640	106
SLC-FF-30-1020	10	180	200	SLX-FF-30-1020	28
SLC-FF-30-1030	10	270	300	SLX-FF-30-1030	28
SLC-FF-30-1040	10	360	400	SLX-FF-30-1040	28
SLC-FF-30-1050	10	450	500	SLX-FF-30-1050	28
SLC-FF-30-1060	10	450	480	SLX-FF-30-1060	40
SLC-FF-30-1040	10	600	640	SLX-FF-30-1040	46
SLC-FF-30-0450	4	150	200	SLX-FF-30-0450	10
SLC-FF-30-0650	6	250	300	SLX-FF-30-0650	18
SLC-FF-30-1250	12	550	600	SLX-FF-30-1250	34
SLC-FF-30-1850	18	750	800	SLX-FF-30-1850	52
SLC-FF-30-2050	20	850	900	SLX-FF-30-2050	58
SLC-FF-30-2450	24	1150	1200	SLX-FF-30-2450	70
SLC-FF-30-3050	30	1450	1500	SLX-FF-30-3050	88
SLC-FF-30-3650	36	1750	1800	SLX-FF-30-3650	106
SLC-FF-30-0850	8	2250	2400	SLX-FF-30-0850	142
SLC-FF-30-0450	4	2650	2700	SLX-FF-30-0450	140

OUR PRODUCT




INDUSTRIAL APPLICATION

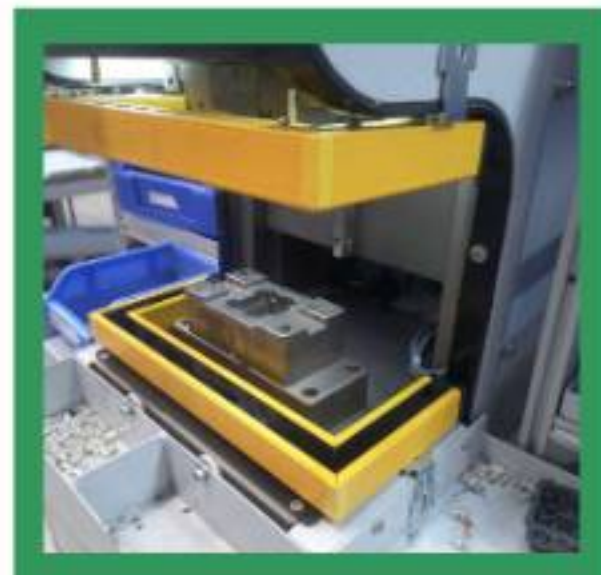


To Protect Your Finger, Hand, Arm, Body From Machine



High Resolution
Finger Protection
20mm

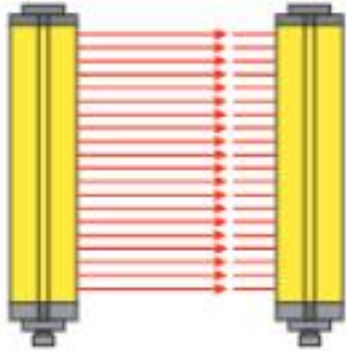

Medium Resolution
Hand Protection
30mm/40mm

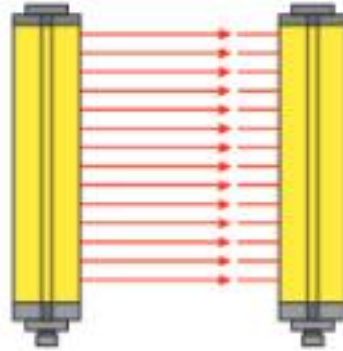

Low Resolution
Arm/Body Protection
50mm/100mm

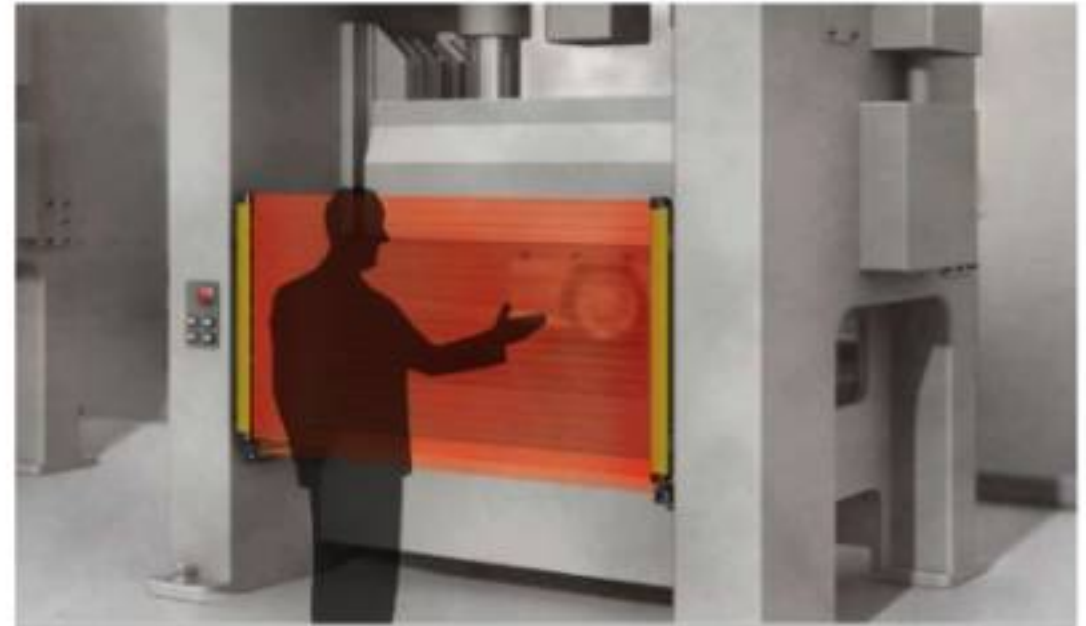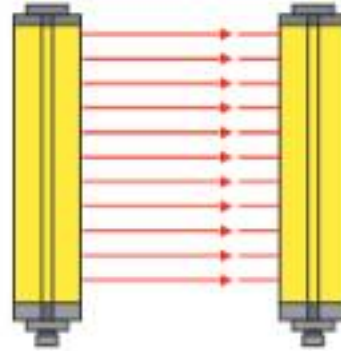

Our Customers



Certification



Type2/4

REDINFRA SYSTEMS PVT. LTD.

Office : No.6,7,8, Shiv Sanjivani Landmark, Opp. Papaya Nursery,
Trimbak Road, Setpur, Nashik- 422007.

Tel. : 9822635183 / 9960635183 / 9860444384 / 02534501295

Email : infrasystemsnsk@gmail.com

Website : www.infrasystems.net / www.infrasensors.in