

Solutions for Power, Control, Safety & Energy Efficiency

July 1st
2017



your energy
our expertise



On Load Manual Transfer Switches for source changeover applications



SIRCOVER from 63 to 3200 A

Benefit from IEC 60947-6-1 & IS/IEC 60947-3 certified Class PC Transfer Switching Equipment that is one of the most widely used class of TSE, to ensure high power availability to the load:

- Globally proven robust range of MTSE for maximum reliability & peace of mind
 - Reliable and easy to use with fail-safe mechanical interlocking in all positions
 - Optimised electrical performance – Designed for inductive (motor) loads
 - Maintenance free – Unique Lateral movement design with self cleaning contacts ensure high performance and power availability.
 - Three stable mechanically held positions – Immune to voltage drops, shocks or vibrations, securing the loads against disturbance and network perturbation
 - Padlocking possible in all 3 positions – Ideal for safe downstream maintenance
 - Distinctly marked position indication – clearly visible on the Handle and Mechanism
 - Easy to upgrade an MTSE to an RTSE or ATSE – Just 4 screws to motorise
- SIRCOVER are available with direct or external handle kits (which is rugged and ergonomic) as well as enclosed in a metal enclosure. Top and bottom cable extension boxes are available to suit any of your installation and cabling requirements.*


OTHER PRODUCTS



SIRCO
Manually operated LBS available for open execution as well as enclosed. From 63 - 5000A



Safety enclosures
Normal atmospheres steel enclosure. From 50 to 630 A

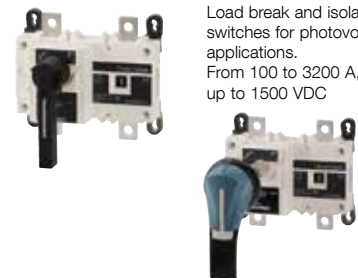

SIRCO PV
Load break and isolation switches for photovoltaic applications. From 100 to 3200 A, up to 1500 VDC

your energy
our expertise



www.socomec.co.in

socomec
Innovative Power Solutions







Load Break Switches

SIRCO

Conforms to IS/IEC 60947-3 up to AC23A¹, Front operated 3 or 4 pole 415 V, 50 Hz.

new

SOLUTION			OPEN EXECUTION				ENCLOSED SOLUTION			
			KIT Type 1		KIT Type 2		Enclosed Switch		Extention Box	
Standard Configuration Includes										
			<ul style="list-style-type: none"> • Switch • Interphase barriers from frame B3 and above • Direct Handle 		<ul style="list-style-type: none"> • Switch • Interphase barriers from frame B3 and above • External Handle • Extension Shaft 200mm 		<ul style="list-style-type: none"> • Enclosure • Switch • Interphase barriers from frame B3 and above • External Handle • Extension Shaft 		Suitable for Top or Bottom Assembly (Price is for 1 number of extension box)	
Frame	Rating	Poles	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)
B3	125A	3P	26K13012A	3879	26K23012A	4219	26E13012A	5563	26E10002A	1285
	160A		26K13016A	4911	26K23016A	5252	26E13016A	6733		
	200A CD		26K13019A	5100	26K23019A	5440	26E13019A	6923		
B4	200A		26K13020A	5580	26K23020A	5919	26E13020A	7062	26E10003A	1988
	250A		26K13025A	7251	26K23025A	7591	26E13025A	9212		
	315A CD		26K13030A	7308	26K23030A	7648	26E13030A	9288		
B5	400A CD		26K13039A	9087	26K23039A	9427	26E13039A	12889	26E10004A	2532
	315A		26K13031A	7808	26K23031A	8148	26E13031A	10417		
	400A		26K13040A	10851	26K23040A	11191	26E13040A	14233		
	500A		26K13050A	11900	26K23050A	12240	26E13050A	15678		
B6	630A		26K13063A	13080	26K23063A	13420	26E13063A	17051	26E10006A	7448
	800A CD		26K13079A	15489	26K23079A	16056	-	-		
	800A	26K13080A	17780	26K23080A	18347	26E13080A	23156			
B7	1000A	26K13100A	29789	26K23100A	30356	26E13100A	37190	26E10007A	9439	
	1250A CD	26K13124A	34000	26K23124A	34567	-	-			
	1250A	26K13125A	40719	26K23125A	41285	26E13125A	51708			
B8	1600A	26K13160A	54977	26K23160A	55543	26E13160A	68152			
	1800A	26K13180A	60634	26K23180A	61200					
	2000A	26K13200A	68257	26K23200A	69390					
B2*	2500A	26K13250A	94139	26K23250A	95272			26E10001A	756	
	3200A	26K13320A	126263	26K23320A	127396					
	63A	26K14006A	2203	26K24006A	2514	26E14006A	3110			
B3	100A	26K14010A	3778	26K24010A	4089	26E14010A	4873	26E10002A	1285	
	125A CD	26K14011A	4133	26K24011A	4444	26E14011A	5760			
	125A	26K14012A	4564	26K24012A	4964	26E14012A	6648			
B4	160A	26K14016A	5778	26K24016A	6178	26E14016A	8000	26E10003A	1988	
	200A CD	26K14019A	6000	26K24019A	6400	26E14019A	8222			
	200A	26K14020A	6564	26K24020A	6964	26E14020A	8446			
B5	250A	26K14025A	8531	26K24025A	8931	26E14025A	10892	26E10004A	2532	
	315A CD	26K14030A	8597	26K24030A	8997	26E14030A	10978			
	400A CD	26K14039A	10691	26K24039A	11364	26E14039A	14893			
B6	315A	26K14031A	9186	26K24031A	11091	26E14031A	12195	26E10006A	7448	
	400A	26K14040A	12765	26K24040A	13165	26E14040A	16548			
	500A	26K14050A	14000	26K24050A	14400	26E14050A	18178			
B7	630A	26K14063A	15388	26K24063A	15788	26E14063A	19759	26E10007A	9439	
	800A CD	26K14079A	18222	26K24079A	18889	26E14079A	23333			
	800A	26K14080A	20918	26K24080A	21585	26E14080A	26961			
B8	1000A	26K14100A	35046	26K24100A	35713	26E14100A	43114			
	1250A CD	26K14124A	40000	26K24124A	40667	26E14124A	59560			
	1250A	26K14125A	47904	26K24125A	48571	26E14125A	59560			
B9	1600A	26K14160A	64678	26K24160A	65345	26E14160A	78520			
	1800A	26K14180A	71333	26K24180A	72000					
	2000A	26K14200A	80302	26K24200A	81636					
B10	2500A	26K14250A	110751	26K24250A	112084					
	3200A	26K14320A	148545	26K24320A	149878					

CD - Compact design

1) please refer technical literature for exact technical characteristics

* Phase Barrier & Shaft is not available in frame B2



Frame	Direct Handle	LP (₹)	External Handle	LP (₹)	1st Aux Contact (1 NO/NC)	LP (₹)	2nd Aux Contact (1 NO/NC)	LP (₹)
B2	42990001A	311	42590001A	489	26091020A	144	26092020A	238
B3	26995042A	311	14212111A IP55	1022	26990031A	356	26990032A	418
B4	26995052A	578	14212111A IP55	1022	26990031A	356	26990032A	418
B5	26995052A	578	14212111A IP55	1022	26990031A	356	26990032A	418
B6 *	27997012A	1289	14433111A IP65	1556	26990031A	356	26990032A	418
B7 *	27997012A	1289	14433111A IP65	1556	26990031A	356	26990032A	418
B8 *	27997012A	1289	14538111A IP65	2622	26990031A	356	26990032A	418

* Handle for frames B6 to B8 are double arms handle



Frame	Shaft 200mm	LP (₹)	Shaft 250mm	LP (₹)	Shaft 320mm	LP (₹)	Shaft 750mm	LP (₹)
B3	14001020A	356	14001025A	444	14001032A	489	14001075A	800
B4	14001020A	356	14001025A	444	14001032A	489	14001075A	800
B5	14001020A	356	14001025A	444	14001032A	489	14001075A	800
B6	14011520A	667	14011525A	800	14011532A	898	-	-
B7	14011520A	667	14011525A	800	14011532A	898	-	-
B8	27993015A	844	-	-	27993018A	1867	-	-



Frame	Interphase barrier - 3P	LP (₹)	Interphase barrier - 4P	LP (₹)	Spreaders - 3P	LP (₹)	Spreaders - 4P	LP (₹)
B3	29985033A	150	29985034A	217	41063016A	314	41064016A	418
B4	29985023A	178	29985024A	259	41063025A	468	41064025A	625
B5	29985013A	206	29985014A	300	41063040A (400A)	635	41064040A (400A)	846
B6	-	-	-	-	41063050A (500A)	840	41064050A (500A)	1022
B7	-	-	-	-	41063063A (630A)	876	41064063A (630A)	1169



Frame	Terminal Shroud - 3P	LP (₹)	Terminal Shroud - 4P	LP (₹)	Terminal Screen Standard - 3P	LP (₹)	Terminal Screen Standard - 4P	LP (₹)
B2	-	-	29944008A	245	-	-	-	-
B3	26943014A	540	26944014A	630	26983012A	428	26984012A	484
B4	26943021A	600	26944021A	720	26983020A	428	26984020A	484
B5	26943051A	960	26944051A	1080	26983050A	548	26984050A	620
B6	-	-	-	-	26983080A	1099	26984080A	1245
B7	-	-	-	-	26983120A	1629	26984120A	1846
B8	-	-	-	-	26983200A	2925	26984200A	3315



Frame	Terminal Screen Wide - Top - 3P	LP (₹)	Terminal Screen Wide - Bottom - 3P	LP (₹)	Terminal Screen wide Top/Bottom - 4P	LP (₹)
B3	26983013A	513	26988013A	513	26984013A	581
B4	26983021A	513	26988021A	513	26984021A	581
B5	26983051A	657	26988051A	657	26984051A	745
B6	26983081A	1318	26988081A	1318	26984081A	1494



Manual Transfer Switching Equipment

SIRCOVER

Conforms to IEC 60947-6-1 up to AC33B¹, IS/IEC 60947-3 up to AC-23A¹,
Front operated 3 or 4 pole 415 V, 50 Hz.


SOLUTION			OPEN EXECUTION				ENCLOSED SOLUTION				
			KIT Type 1		KIT Type 2		Enclosed Switch		Extention Box		
Standard Configuration Includes											
			<ul style="list-style-type: none"> Transfer switch Direct handle Bridging Bars up to 1600 A Interphase barriers from frame B3 and above 		<ul style="list-style-type: none"> Transfer switch Bridging Bars up to 1600 A Extended handle 200 mm shaft Interphase barriers from frame B3 and above 		<ul style="list-style-type: none"> Transfer switch Extended handle Bridging Bars up to 1600 A Extension shaft Interphase barriers from frame B3 and above 		Suitable for Top or Bottom Assembly (Price is for 1 number of extension box)		
Frame	Rating	Poles	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	
B3	125A	3P	41K13013A	7289	41K23013A	7629	41E13013A	10588	41E10002A	2216	
	160A		41K13016A	8004	41K23016A	8344	41E13016A	11612			
	200A		41K13020A	9725	41K23020A	10065	41E13020A	13334			
B4	250A		41K13025A	14176	41K23025A	14516	41E13025A	18450	41E10003A	2368	
	315A		41K13031A	14983	41K23031A	15323	41E13031A	19281			
	400A		41K13040A	22041	41K23040A	22380	41E13040A	28196			
B5	500A		41K13050A	23649	41K23050A	23989	41E13050A	30465	41E10004A	3490	
	630A		41K13063A	25991	41K23063A	26332	41E13063A	32601			
	800A CD		41K13079A	35156	41K23079A	35496	-	-			
B6	800A		41K13080A	38873	41K23080A	39440	41E13080A	48315	41E10005A	3738	
	1000A		41K13100A	66676	41K23100A	67243	41E13100A	86068			
	1250A		41K13120A	89063	41K23120A	89630	41E13120A	119591			
B7	1600A	41K13160A	104354	41K23160A	104920	41E13160A	162166	41E10006A	8310		
	2000A	41K13200A	163319	41K23200A	164452	41E13200A	209180				
	2500A	41K13250A	217917	41K23250A	219051	41E13250A	278242				
B8	3200A	41K13320A	298511	41K23320A	299644	41E13320A	364096	41E10007A	26162		
	63A	41K14006A	4202	41K24006A	4513	41E14006A	6303			41E10008A	33674
	100A	41K14010A	5647	41K24010A	5958	41E14010A	8035				
125A CD	41K14011A	6978	41K24011A	7400	41E14011A	10000					
B3	125A	4P	41K14013A	8576	41K24013A	8976	41E14013A	11933	41E10001A	1508	
	160A		41K14016A	9416	41K24016A	9816	41E14016A	13085			
	200A		41K14020A	11442	41K24020A	11842	41E14020A	15110			
B4	250A		41K14025A	16677	41K24025A	17077	41E14025A	21011	41E10002A	2216	
	315A		41K14031A	17627	41K24031A	18027	41E14031A	21986			
	400A		41K14040A	25931	41K24040A	26331	41E14040A	32146			
B5	500A		41K14050A	27822	41K24050A	28222	41E14050A	34698	41E10003A	2368	
	630A		41K14063A	30578	41K24063A	30978	41E14063A	37247			
	800A CD		41K14079A	41360	41K24079A	41760	41E14079A	46267			
B6	800A		41K14080A	45733	41K24080A	46400	41E14080A	55275	41E10004A	3490	
	1000A		41K14100A	78442	41K24100A	79108	41E14100A	97934			
	1250A		41K14120A	104780	41K24120A	105447	41E14120A	135408			
B7	1600A	41K14160A	122769	41K24160A	123436	41E14160A	180682	41E10005A	3738		
	2000A	41K14200A	192140	41K24200A	193473	41E14200A	238200				
	2500A	41K14250A	256373	41K24250A	257707	41E14250A	316898				
B8	3200A	41K14320A	351189	41K24320A	352523	41E14320A	416974	41E10006A	8310		

CD - Compact Design

1) please refer technical literature for exact technical characteristics

* Phase Barrier & Shaft is not available in B2

SIRCOVER Accessories

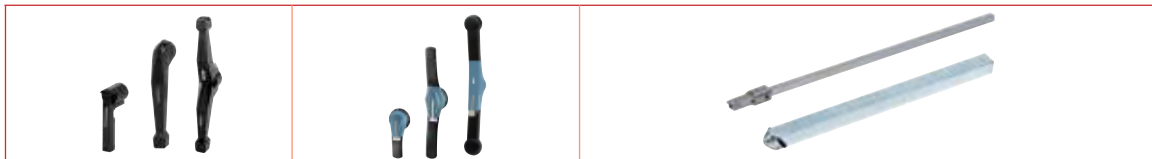

Frame	Direct Handle	LP (₹)	External Handle	LP (₹)	Shaft 200mm	LP (₹)	Shaft 320mm	LP (₹)
B2	42990002A	378	42590002A	578	-	-	-	-
B3	41995012A	756	14212113A IP55	1200	14001020A	356	14001032A	489
B4	41995012A	756	14212113A IP55	1200	14001020A	356	14001032A	489
B5	41995012A	756	14212113A IP55	1200	14001020A	356	14001032A	489
B6*	27997052A	1956	14433113A IP65	2889	14011520A	667	14011532A	898
B7*	27997052A	1956	14433113A IP65	2889	14011520A	667	14011532A	898
B8*	27997012A	1289	14538113A IP65	4889	27993015A	844	27993018A	1867

* Handle for frames B6 to B8 are double arms handle



Frame	Interphase barrier 3P	LP (₹)	Interphase barrier 4P	LP (₹)	1st or 2nd Aux Contact (1 NO/NC)	LP (₹)
B2	-	-	-	-	42091030A	444
B3	29985036A	300	29985038A	435	41090021A	462
B4	29985026A	356	29985028A	516	41090021A	462
B5	29985016A	413	29985018A	599	41090021A	462
B6	-	-	-	-	41090021A	462
B7	-	-	-	-	41090021A	462
B8	-	-	-	-	41090021A	462



Frame	Terminal Screen 3p	LP (₹)	Terminal Screen 4p	LP (₹)	Terminal Screen 3p wide	LP (₹)	Terminal Screen 4p wide	LP (₹)	Terminal Shroud 3P	LP (₹)	Terminal Shroud 4P	LP (₹)
B2	-	-	-	-	-	-	-	-	-	-	29944008A	254
B3	15093012A	551	15094012A	625	15093013A	661	15094013A	749	26943014A	540	26944014A	630
B4	15093025A	656	15094025A	744	15093026A	788	15094026A	892	26943021A	600	26944021A	720
B5	15093063A	1140	15094063A	1150	15093064A	1368	15094064A	1550	26943051A	960	26944051A	1080
B6	15093080A	1320	15094080A	1450	15093081A	1584	15094081A	1796	-	-	-	-
B7	15093160A	1707	15094160A	1933	-	-	-	-	-	-	-	-



Frame	Rating	Spreaders 3P	LP (₹)	Spreaders 4P	LP (₹)
B3	125A - 200A	41063016A	314	41064016A	418
	250A - 315A	41063025A	468	41064025A	625
B4	400A	41063040A	635	41064040A	846
	500A	41063050A	840	41064050A	1022
B5	630A - CD800A	41063063A	876	41064063A	1169



Load Break Switches

LBS

Conforms to IS/IEC 60947-3 AC-23A¹, Front operated 4 pole 415 V, 50 Hz.

SOLUTION		OPEN EXECUTION		ENCLOSED SOLUTION	
		Load break switch		Enclosed Load break switch	
Standard Configuration Includes					
		<ul style="list-style-type: none"> • Switch • Interphase barrier from 800A and above • Handle • Door Interlock • 1st Aux Contact from 250A and above 		<ul style="list-style-type: none"> • Enclosure • Switch • Interphase barrier from 800A and above • External Handle • Shaft • 1st Aux Contact from 250A and above • Door Interlock 	
Rating	Poles	Reference	LP (₹)	Reference	LP (₹)
63A*	4P	GL00634POI	2202	GL00634PEI	3109
125A*		GL01254POI	4564	GL01254PEI	6648
200A*		GL02004POI	6564	GL02004PEI	8446
250A*		GL02504POI	8531	GL02504PEI	10892
320A*		GL03204POI	9186	GL03204PEI	12195
400A*		GL04004POI	12766	GL04004PEI	16548
630A*		GL06304POI	15388	GL06304PEI	19758
800A		GL08004POI	20918	GL08004PEI	26961
1000A		GL10004POI	35045	GL10004PEI	43114
1250A		GL12504POI	47904	GL12504PEI	59561
1600A		GL16004POI	64679	GL16004PEI	78520
2000A		GL20004POI	80302	GL20004PEI	96749
2500A		GL25004POI	110751	GL25004PEI	131963
3200A		GL31504POI	148544	GL31504PEI	178446

1) please refer technical literature for exact technical characteristics

* Rating up to 630A will be available only till stock lasts

LBS Accessories

Frame	Direct Handle	LP (₹)	1st Aux Contact	LP (₹)	2nd Aux Contact	LP (₹)	Door Interlock Assembly	LP (₹)	Phase Barrier Kit	LP (₹)	Shaft	LP (₹)
63A	42990001GI	378	26091020GI	144	26092020GI	238	26590001GI	234	-	-	-	-
125A	42990003GI	420	26091040GI	210	26092040GI	327	26590002GI	303	-	-	42190003GI	-
200A	42990005GI	420	26091040GI	210	26092040GI	327	26590002GI	303	-	-	42190003GI	420
250A	42990006GI	467	26091040GI	210	26092040GI	327	26590002GI	303	-	-	42190003GI	420
320A	42990007GI	607	26091040GI	210	26092040GI	327	26590002GI	303	-	-	42190003GI	420
400A	42990008GI	653	26091040GI	210	26092040GI	327	26590002GI	303	-	-	42190003GI	420
630A	42990009GI	700	26091040GI	210	26092040GI	327	26590002GI	303	-	-	42190003GI	420
800A	42990010GI	840	26091040GI	210	26092040GI	327	26590003GI	584	G89B765GI	420	42190003GI	420
1000A*	42990011GI	966	26091040GI	210	26092040GI	327	26590003GI	584	G89B765GI	420	42190003GI	420
1250A*	42990011GI	966	26091040GI	210	26092040GI	327	26590003GI	584	G89B143GI	700	42190003GI	420
1600A*	42990011GI	966	26091040GI	210	26092040GI	327	26590003GI	584	G89B143GI	700	42190003GI	420
2000A*	42990011GI	966	26091040GI	210	26092040GI	327	26590003GI	584	G89B143GI	700	42190003GI	420
2500A*	42990011GI	966	26091040GI	210	26092040GI	327	26590003GI	584	G89B143GI	700	42190003GI	420
3200A*	42990011GI	966	26091040GI	210	26092040GI	327	26590003GI	584	G89B143GI	700	42190003GI	420



* 1000A and above is having double arm handle



Changeover switches

COS

Conforms to IS/IEC 60947-3, AC-23A¹, front operated 4 pole 415 V, 50 Hz

SOLUTION		OPEN EXECUTION		ENCLOSED SOLUTIONS	
		Switch		Enclosed Switch	
Standard Configuration Includes					
		<ul style="list-style-type: none"> • Switch • Handle • Bridging bars • Door Interlock Assembly • Interphase barrier from 800A and above • 1st Aux Contact from 250A and above 		<ul style="list-style-type: none"> • Enclosure • Switch • External handle • Bridging bars • Shaft • Door Interlock Assembly • 1st Aux Contact from 250A and above • Interphase barrier from 800A and above 	
Rating	Poles	Reference	LP (₹)	Reference	LP (₹)
63A*	4P	GCD00634POI	4513	GCD00634PEI	6303
100A*		GCD01004POI	5958	GCD01004PEI	8035
125A*		GC01254POI	8976	GC01254PEI	11934
160A*		GC01604POI	9816	GC01604PEI	13085
200A*		GC02004POI	11842	GC02004PEI	15111
250A*		GC02504POI	17077	GC02504PEI	21011
320A*		GC03204POI	18027	GC03204PEI	21986
400A*		GC04004POI	26331	GC04004PEI	32146
630A*		GC06304POI	30978	GC06304PEI	37247
800A		GC08004POI	46400	GC08004PEI	55275
1000A		GC10004POI	79108	GC10004PEI	97934
1250A		GC12504POI	105447	GC12504PEI	135409
1600A		GC16004POI	123436	GC16004PEI	180682
2000A		GC20004POI	193473	GC20004PEI	238200
2500A		GC25004POI	257707	GC25004PEI	316897
3200A		GC31504POI	352523	GC31504PEI	416974

1) please refer our detailed technical catalogue

* Rating up to 630A will be available only till stock lasts

COS Accessories



Rating	Direct Handle	LP (₹)	1st Aux Contact (1 NO/NC)	LP (₹)	2nd Aux Contact (1 NO/NC)	LP (₹)	Door Interlock Assembly	LP (₹)	Phase Barrier Kit Small	LP (₹)	Phase Barrier Kit Long	LP (₹)	Shaft	LP (₹)
63A	42990002GI	378	42091030GI	257	42092030GI	443	42590002GI	234	-	-	-	-	-	-
100A	42990002GI	378	42091030GI	257	42092030GI	443	42590002GI	234	-	-	-	-	-	-
125A	42990003GI	420	42091040GI	350	42092040GI	604	42590003GI	327	-	-	-	-	42190003GI	420
160A	42990004GI	420	42091040GI	350	42092040GI	604	42590003GI	327	-	-	-	-	42190003GI	420
200A	42990005GI	420	42091040GI	350	42092040GI	604	42590003GI	327	-	-	-	-	42190003GI	420
250A	42990006GI	467	42091040GI	350	42092040GI	604	42590003GI	327	-	-	-	-	42190003GI	420
320A	42990007GI	607	42091040GI	350	42092040GI	604	42590003GI	327	-	-	-	-	42190003GI	420
400A	42990008GI	653	42091040GI	350	42092040GI	604	42590003GI	327	-	-	-	-	42190003GI	420
630A	42990009GI	700	42091040GI	350	42092040GI	604	42590003GI	327	-	-	-	-	42190003GI	420
800A	42990010GI	840	42091050GI	491	42092060GI	672	42590004GI	514	G89B136GI	420	G89B143GI	700	42190003GI	420
1000A*	42990011GI	966	42091050GI	491	42092060GI	672	42590004GI	514	G89B136GI	420	G89B143GI	700	42190003GI	420
1250A*	42990011GI	966	42091050GI	491	42092060GI	672	42590004GI	514	G89B136GI	420	G89B143GI	700	42190003GI	420
1600A*	42990011GI	966	42091050GI	491	42092060GI	672	42590004GI	514	G89B136GI	420	G89B143GI	700	42190003GI	420
2000A*	42990011GI	966	42091050GI	491	42092060GI	672	42590004GI	514	G89B136GI	420	G89B491GI	887	42190003GI	420
2500A*	42990011GI	966	42091050GI	491	42092060GI	672	42590004GI	514	G89B136GI	420	G89B491GI	887	42190003GI	420
3200A*	42990011GI	966	42091050GI	491	42092060GI	672	42590004GI	514	G89B136GI	420	G89B491GI	887	42190003GI	420



* 1000A and above is having double arm handle



Switches Fuse Changeover

FCOS

Conforms to IS/IEC 60947-3 AC-23A¹, front operated 4 pole 415 V, 50 Hz.

SOLUTION		OPEN EXECUTION		ENCLOSED SOLUTION	
		Switch		Enclosed Switch	
Standard Configuration Includes					
		<ul style="list-style-type: none"> • Switch • Bridging Bars • Direct Handle • Fuse barrier • Supply Barrier • 1st Aux Contact from 250A and above 		<ul style="list-style-type: none"> • Enclosure • Switch • Bridging Bars • Direct Handle • Fuse barrier • Supply Barrier • 1st Aux Contact from 250A and above 	
Rating	Poles	Reference	LP (₹)	Reference	LP (₹)
125A *	4P	GF01254POI	11614	GF01254PEI	14892
200A *		GF02004POI	21237	GF02004PEI	28146
250A *		GF02504POI	21431	GF02504PEI	29785
320A *		GF03204POI	22137	GF03204PEI	30474
400A *		GF04004POI	31742	GF04004PEI	42820
630A *		GF06304POI	37045	GF06304PEI	51047

1) please refer technical literature for exact technical characteristics
 - All FCOS switch prices are without fuses
 *Above ratings are available till stock lasts

FCOS Accessories

Rating	Direct Handle	LP (₹)	1st Aux Contact (1 NO/NC)	LP (₹)	2nd Aux Contact (1 NO/NC)	LP (₹)	Door Interlock Assembly	LP (₹)
125A	42990003GI	420	42091040GI	350	42092040GI	604	42590003GI	327
200A	42990006GI	467	42091040GI	350	42092040GI	604	42590003GI	327
250A	42990006GI	467	42091040GI	350	42092040GI	604	42590003GI	327
320A	42990007GI	607	42091040GI	350	42092040GI	604	42590003GI	327
400A	42990008GI	653	42091040GI	350	42092040GI	604	42590003GI	327
630A	42990009GI	700	42091040GI	350	42092040GI	604	42590003GI	327



Rating	Fuse Barrier	LP (₹)	Phase Barrier	LP (₹)	Shaft	LP (₹)
125A	G891088GI	140	G89B595GI	70	42190003GI	420
200A	G891157GI	234	G89B596GI	182	42190003GI	420
250A	G891157GI	234	G89B596GI	182	42190003GI	420
320A	G891157GI	234	G89B596GI	182	42190003GI	420
400A	G89B594GI	327	G89B597GI	201	42190003GI	420
630A	G89B594GI	327	G89B597GI	201	42190003GI	420



Bypass changeover switches

BPCOS

Conforms to IS/IEC 60947-3 AC-23A¹, front operated 4 pole 415 V, 50 Hz.

SOLUTION		OPEN EXECUTION		ENCLOSED SOLUTION	
		Switch		Enclosed Switch	
Standard Configuration Includes					
		<ul style="list-style-type: none"> • Switch • Interphase barrier from 800A and above • Direct Handle • Bridging Bars • 1st Aux Contact from 250A and above 		<ul style="list-style-type: none"> • Enclosure • Switch • Interphase barrier from 800A and above • Direct Handle • Bridging Bars • 1st Aux Contact from 250A and above • Door Interlock 	
Rating	Poles	Reference	LP (₹)	Reference	LP (₹)
125A*	4P	GBP01254POI	14085	GBP01254PEI	18052
200A*		GBP02004POI	17741	GBP02004PEI	21826
250A*		GBP02504POI	25733	GBP02504PEI	31188
320A*		GBP03204POI	26733	GBP03204PEI	32230
400A*		GBP04004POI	40172	GBP04004PEI	46525
630A*		GBP06304POI	45761	GBP06304PEI	54367
800A*		GBP08004POI	62989	GBP08004PEI	78227
1000A*		GBP10004POI	107633	GBP10004PEI	134795
1250A*		GBP12504POI	152141	GBP12504PEI	181942
1600A*		GBP16004POI	210164	GBP16004PEI	242705

1) please refer our detailed technical catalogue

* Above ratings are available till stock lasts



Rating	Direct Handle	LP (₹)	1st Aux Contact (1NO/NC)	LP (₹)	2nd Aux Contact (1NO/NC)	LP (₹)
125A	41990001GI	966	42091040GI	350	42092040GI	604
200A	41990002GI	966	42091040GI	350	42092040GI	604
250A	41990003GI	966	42091040GI	350	42092040GI	604
320A	41990004GI	966	42091040GI	350	42092040GI	604
400A	41990005GI	966	42091040GI	350	42092040GI	604
630A	41990006GI	966	42091040GI	350	42092040GI	604
800A	41990011GI	966	42091050GI	491	42092060GI	672
1000A	41990011GI	966	42091050GI	491	42092060GI	672
1250A	41990011GI	966	42091050GI	491	42092060GI	672
1600A	41990011GI	966	42091050GI	491	42092060GI	672



Rating	Phase Barrier Kit Small	LP (₹)	Phase Barrier Kit Big	LP (₹)	Door Interlock Assembly	LP (₹)
125A	-	-	-	-	42590003GI	327
200A	-	-	-	-	42590003GI	327
250A	-	-	-	-	42590003GI	327
320A	-	-	-	-	42590003GI	327
400A	-	-	-	-	42590003GI	327
630A	-	-	-	-	42590003GI	327
800A	G89B604GI	514	G89B766GI	700	42590004GI	514
1000A	G89B604GI	514	G89B766GI	700	42590004GI	514
1250A	G89B604GI	514	G89B766GI	700	42590004GI	514
1600A	G89B604GI	514	G89B766GI	700	42590004GI	514

BPCOS Accessories

When it comes to transfer switching equipment, opt for reliability



ATyS from 40 to 6300 A



ATyS: a complete range of transfer switching equipment for every application from 40 to 6300 A

ATyS is remotely operated or fully automatic transfer switching equipment (TSE) assures the continuity of power to a load in a safe and reliable way.

- Wider range of AtyS products for different applications. With or without dual power supply, ATS controller, Communication, Software and more.
- Tested in full compliance with IEC 60947-6-1 & IEC 60947-3.
- Unique lateral movement design with self cleaning contacts ensure high performance and power availability.
- Wide band control voltage 166 - 332 V for motor.
- Self diagnostic watchdog relay for the motor and controller.
- 3-positions (I-0-II) pad lockable with 100% manual on-load transfer feasibility with operating handle.



Safe



Plug & play



Robust



Easy maintenance

To find out more:



your energy
our expertise



www.socomec.co.in





socomec
Innovative Power Solutions







Remote & Automatic operated transfer switches

ATyS

Conforms to IEC 60947-6-1, IS/IEC 60947-3, 4 pole

SOLUTION		Remotely Operated							
		ATyS S		ATyS Sd		ATyS S 12Vdc		ATyS S 24Vdc	
Standard Configuration Includes									
		<ul style="list-style-type: none"> • Switch • Handle • Bridging Bars 		<ul style="list-style-type: none"> • Switch • Handle • Bridging Bars • Dual Power Supply 		<ul style="list-style-type: none"> • Switch • Handle • Bridging Bars 		<ul style="list-style-type: none"> • Switch • Handle • Bridging Bars 	
Rating	Poles	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)
40A	4P	95034004SL	17465	95134004SL	19387	95054004SL	17465	95064004SL	19405
63A		95034006SL	18260	95134006SL	20268	95054006SL	18260	95064006SL	20288
80A		95034008SL	19847	95134008SL	22030	95054008SL	19847	95064008SL	22052
100A		95034010SL	22228	95134010SL	24674	95054010SL	22228	95064010SL	24698
125A		95034012SL	23816	95134012SL	26436	95054012SL	23816	95064012SL	26462

SOLUTION		Remotely Operated		Automatically operated					
		ATyS d M		ATyS t M		ATyS g M		ATyS p M	
Standard Configuration Includes									
		<ul style="list-style-type: none"> • Switch • Handle • Aux Contact 		<ul style="list-style-type: none"> • Switch • Handle 		<ul style="list-style-type: none"> • Switch • Handle 		<ul style="list-style-type: none"> • Switch • Handle 	
Rating	Poles	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)
40A	4P	93234004G	31589	93444004G	32818	93544004G	48612	93644004G	On Request
63A		93234006G	33629	93444006G	34667	93544006G	50903	93644006G	On Request
80A		93234008G	35801	93444008G	36516	93544008G	53074	93644008G	On Request
100A		93234010G	35917	93444010G	37440	93544010G	53191	93644010G	On Request
125A		93234012G	40501	93444012G	41369	93544012G	57775	93644012G	On Request
160A		93234016G	48714	93444016G	50382	93544016G	65987	93644016G	On Request

For 2Pole ATyS M, please consult us
 These products are DIN rail mountable, please refer to catalogue for more information



Remote & Automatic operated transfer switches

ATYS

Conforms to IEC 60947-6-1, IEC 60947-3, 4 pole

SOLUTION		Remotely Operated		Automatically operated					
		ATyS r		ATyS t		ATyS g		ATyS p	
Standard Configuration Includes									
		<ul style="list-style-type: none"> • Switch • Handle • Bridging Bars up to 1600A 		<ul style="list-style-type: none"> • Switch • Handle • Bridging Bars up to 1600A • Voltage Sensing Kit 		<ul style="list-style-type: none"> • Switch • Handle • Bridging Bars up to 1600A • Voltage Sensing Kit 		<ul style="list-style-type: none"> • Switch • Handle • Bridging Bars up to 1600A • Voltage Sensing Kit 	
Rating	Poles	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)
125A	4P	95234012SL	44007	95434012SLVR	65286	95534012SLVR	82756	95734012SLVR	On Request
160A		95234016SL	46012	95434016SLVR	73032	95534016SLVR	91230	95734016SLVR	On Request
200A		95234020SL	47105	95434020SLVR	80208	95534020SLVR	99628	95734020SLVR	On Request
250A		95234025SL	58767	95434025SLVR	87384	95534025SLVR	108026	95734025SLVR	On Request
315A		95234031SL	59678	95434031SLVR	95608	95534031SLVR	117724	95734031SLVR	On Request
400A		95234040SL	74256	95434040SLVR	103833	95534040SLVR	127422	95734040SLVR	On Request
500A		95234050SL	79723	95434050SLVR	117611	95534050SLVR	143876	95734050SLVR	On Request
630A		95234063SL	94300	95434063SLVR	131388	95534063SLVR	160332	95734063SLVR	On Request
800A		95234080SL	126189	95434080SLVR	179253	95534080SLVR	219064	95734080SLVR	On Request
1000A		95234100SL	155345	95434100SLVR	188364	95534100SLVR	227944	95734100SLVR	On Request
1250A		95234120SL	192700	95434120SLVR	220147	95534120SLVR	266248	95734120SLVR	On Request
1600A		95234160SL	239167	95434160SLVR	283811	95534160SLVR	339895	95734160SLVR	On Request
2000A		95234200G	349238	95434200VR	364189	95534200VR	425907	95734200VR	On Request
2500A		95234250G	386007	95434250VR	400750	95534250VR	467586	95734250VR	On Request
3200A		95234320G	496264	95434320VR	510384	95534320VR	592588	95734320VR	On Request

* For 3P ATyS, please consult us

ATyS Accessories



References	Description	LP (₹)
95992010G	HMI ATyS D10* compatible with C30, ATyS d, t, g, p	5715
95992020G	HMI ATyS D20* compatible with C30, ATyS p, ATyS p M	6429
15993020G	ATS CONTROLLER ATyS C20 for RTSE products	14652
15993030G	ATS CONTROLLER ATyS C30 for RTSE products	17273
13094006G	Bridging bars 40A - 125A for ATyS M	3269
13094016G	Bridging bars 160A for ATyS M	6288
13090001G	1st Auxiliary contact 40 - 160 A for ATyS M with 1 C/O contact for position I,0&II	3210
13994006G	Voltage sensing tap for ATyS M	2690
22944016G	Terminal Shrouds for ATyS M	634
48250204G	Ethernet Module with RS 485 for ATyS p/DirisA40/41(MODBUS gateway & with Embedded Webserver)	29192
48250203G	Ethernet Module for ATyS p/Diris A40/41 (MODBUS TCP or RTU over TCP protocol & with Embedded Webserver)	14350
48250092G	RS 485 Modbus Communication for ATyS p/Diris A40/41	3804
15992001G	2 Inputs/ Output modules for ATyS p	6667
15994001G	Dual Power Supply for ATyS S & ATyS r	10646



SO expert



www.socomec.co.in

Optimise your energy performance with Socomec

Metering

Measurement and monitoring multi-circuit system
DIRIS Digiware



Single-circuit energy meters
COUNTIS E



Measure

Measurement and monitoring multi-circuit system
DIRIS Digiware



Single-circuit measurement units
DIRIS A



Single & multifunction energy meters
MULTIS Lm35/MULTIS Lm46



Electrical network analyser
DIRIS Q800



Centralise/ Monitor/Analyse

Communication gateway
DIRIS G



Energy management software
WEBVIEW



your energy
our expertise



www.socomec.co.in

socomec
Innovative Power Solutions

SOCOMECH INDIA PRIVATE LIMITED - 756, Pace City - II Sector 37 Gurgaon -122002, Haryana, India
Tel. +91 44 3921 5466 · Mobile : +91 9711229993 · Email: info.in@socomec.com · CIN: U00000HR1999PTC038504

Measurement and energy management



COUNTIS (LCD Display)



References	Description	LP (₹)
48503019G	COUNTIS E00 1PH, Direct 32A, Active Energy Meter, 1 Module width(18 mm) with vertical LCD display	5588
48503039G	COUNTIS E03 1PH, Direct 40A, Active Energy Meter, 1 Module width(18 mm) with vertical LCD display with MODBUS	7336
48503000G	COUNTIS E10 1PH Direct 63A, Active Energy Meter with pulse output	8032
48503001G	COUNTIS E11 1PH Direct 63A, Dual tariff, Active Energy Meter with pulse output	8565
48503043G	COUNTIS E13 1PH Direct 80A, Dual tariff, Active Energy Meter with MODBUS	17333
48503047G	COUNTIS E17 1PH Direct 80A, Dual tariff, Active Energy Meter with Ethernet	28942
48503003G	COUNTIS E20 3PH Direct 63A, Active Energy Meter with pulse output	12290
48503004G	COUNTIS E21 3PH Direct 63A Dual tariff, Active Energy Meter with pulse output	13237
48503050G	COUNTIS E23 3PH Direct 80A, Dual tariff, Active Energy Meter with MODBUS	23120
48503054G	COUNTIS E27 3PH Direct 80A, Dual tariff, Active Energy Meter with Ethernet	38996
48503005G	COUNTIS E30 3PH Direct 100A, Active Energy Meter with pulse output	15774
48503006G	COUNTIS E31 3PH Direct 100A Dual tariff, Active Energy Meter with pulse output	16059
48503012G	COUNTIS E33 3PH Direct 100A, Dual tariff, Active Energy Meter with MODBUS	24946
48503008G	COUNTIS E40 3PH Active Energy Meter via CT/5A upto 6000 A	10959
48503009G	COUNTIS E41 3PH Dual Tariff Active Energy Meter via CT/5A upto 6000 A	12121
48503017G	COUNTIS E43 Dual Tariff Active Energy Meter via CT/5A upto 6000 A & with RS485	21774
48503016G	COUNTIS E63 3x1PH Direct 100A ,Active Energy Meter & with RS485	25098
48530000G	COUNTIS ECi2 Multi-Utility Pulse concentrator With upto 7 Insulated Logical inputs	23263
48530001G	COUNTIS ECi3 Multi-Utility Pulse concentrator With upto 7 Insulated Logical inputs+ 2 Analog inputs	26750

MULTIS "m" Series (LED/LCD display)



References	Description	LP (₹)
192J9024G	Multis Im15, Ammeter, 1ph, single line 5A, class 1	1000
192J9025G	Multis Im15, Ammeter, 1ph, single line 1A, class 1	1000
192J9026G	Multis Im35, Ammeter, 3 ph/4w, single line, 5A class 1	1467
192J9027G	Multis Im35, Ammeter, 3 ph/4w, single line, 1A class 1	1467
192J9014G	Multis Vm15, Voltmeter, 1ph, single line, class 1	1000
192J9015G	Multis Vm35, Voltmeter, 3 ph/4w, single line, class 1	1369
192J9101G	Multis Lm25, class 1, V, A, F, Meter, 3 line display	3040
192J9114G	Multis Lm35, class 1, Dual source energy meter, LCD Display of P,E,PF,I,V,Thd V & I, Max I, Kva, KW, with RS 485	4489
192J9113G	Multis Lm42, class 1, AC Energy meter, LCD display of kWh with RS 485 & thro comm. (E,P,PF,I,V,Max I, Kva, KW)	4222
192J9112G	Multis Lm46, class 1, AC, 3 line display, V, A, F, P, Q, S, E, Max KW with RS485 port	8320
192J9120G	Multis L50, CI-1 LCD VAF, PE with THD. Optional RS485 & IN/OUT modules	10800
192J9200G	Multis Lm55, class 1, AC, 3 line display, V, A, F, P, PF, max kW with THD with maximum demand indication. Built in RS485 port	13778
192J9201G	Multis Lm56, class 0.5, AC, 3 line display, V, A, F, P, PF, max kW with THD with maximum demand indication. Built in RS485 port	15778

P-Active Power(KW), Q-Reactive Power(KVAR), S-Apparent Power(KVA), E-Active Energy(KWH)



Measurement and energy management

DIRIS (with LCD multiline display with accuracy class upto 0.5s)



References	Description	LP (₹)
48250010G	DIRIS A10 W/O RS485, class 0.5s, V, I, F, P, Q, S, PF, kWh, kVARh, THDi & V, Dual source	12036
48250011G	DIRIS A10 With RS485, class 0.5s, V, I, F, P, Q, S, PF, kWh, kVARh, THDi & V, Dual source	14293
48250200G *	DIRIS A20, class 0.5s, V, I, F, P, Q, S, PF, kWh, kVARh, max kW, kVA, kVAR, THDi & V up to 50th row	12710
48250080G	1 OUT A20 module	3007
48250082G	RS485 A20 module	3116
48250201G *	DIRIS A40, class 0.5s, V, I, F, P, Q, S, PF, kWh, kVARh, kVAh, max & Avg(I, V, PF, kW, kVA, kVAR), THDi, V & I up to 63rd row, 3ph current bar graph	15211
48250202G **	DIRIS A41, features same as DIRIS A40 + actual neutral current measurement through 4th CT	29176
48250207G **	DIRIS A60, features same as DIRIS A40 + PQM Device for Voltage Sag, Swell & Current rise recordings	56261
48250090G	2 Pulse A40/A41 module	2985
48250092G	RS 485 Modbus Communication for ATyS p/Diris A40/41	3804
48250093G	2 0/4-20mA Analog Output module A40/A41	7659
48250094G	2 IN/2OUT A40/A41 module for alarm/trip purposes for Max V, I, F, P, Q, S, Temp, THD, V & I parameters	5535
48250097G	MEMORY A40/A41 module with RTC & with storage for P+, P-, Q+, Q-, last Max/Min values for V, I, F, P, Q, THD, V & I	11808
48250203G	Ethernet Module for ATyS p/Diris A40/41 (MODBUS TCP or RTU over TCP protocol & with Embedded Webserver)	14350
48250204G	Ethernet Module with RS 485 for ATyS p/Diris A40/41 (MODBUS gateway & with Embedded Webserver)	29192
48250205G	PROFIBUS-DP A40 module	14350
48250206G	Temperature module - Temp indication (Internal + 3 External sensors PT 100)	13448

* Upto max 4 modules possible & in that upto 3 nos, 2IN/2OUT & for balance modules max 1 no. can be fitted.

** Upto max 3 modules possible & in that upto 3 nos, 2IN/2OUT & for balance modules max 1 no. can be fitted.

DIRIS Q800



References	Description	LP (₹)
48260100G	Diris Q800 Electrical network analyser with 192 x 144 mm color touchscreen for power quality/flicker/transient measurements/current waveform/Fresnel diagram	On request

DIRIS Digiware

Measurement and monitoring system for electrical installations



MONITORING DEVICES & MODULES

References	Description	LP (₹)
48290010G	DIRIS B-10 RS485-MODBUS-230VAC	On request
48290000G	DIRIS B-30 RS485-MODBUS-230VAC	On request
48290030G	DIRIS O-iod DIGITAL MODULE	On request
48290031G	DIRIS O-ioa 0/4-20mA MODULE	On request
48290032G	DIRIS O-it TEMPERATURE MODULE	On request
48290033G	DIRIS O-m MODBUS RS485 MODULE	On request
48290034G	DIRIS O-p PROFIBUS DP MODULE	On request
48290035G	DIRIS O-b/ip BACNET MODULE	On request
48290036G	DIRIS O_b/mstp BACNET MODULE	On request



POWER SUPPLY

References	Description	LP (₹)
48290120G	P15 AUX SUPPLY 100-240VAC->24 VDC 15W	On request

DIRIS G GATEWAY

References	Description	LP (₹)
48290300G	DIRIS G-30 RS/ETH MONITORING	On request
48290302G	DIRIS G-50 RS/ETH MONIT+REPORT	On request



DISPLAY

References	Description	LP (₹)
48290200G	DIRIS D-30 Single-point display	On request
48290199G	DIRIS D-40 Multi-point display - RS485 output	On request
48290201G	DIRIS D-50 Multi-point display - Ethernet output	On request
48290202G	DIRIS D-70 Multi-point display - Webview Webserver - Ethernet output	On request



BLIND INTERFACE & REPEATER

References	Description	LP (₹)
48290101G	C-31 SYSTEM INTERFACE	On request
48290103G	C-32 REPEATER	On request



VOLTAGE SENSING MODULE

References	Description	LP (₹)
48290105G	U-10 VOLTAGES INPUTS METERING	On request
48290106G	U-20 VOLTAGES INPUTS MONITORING	On request
48290102G	U-30 VOLTAGES INPUTS ANALYSIS	On request

CLOSED TYPE CURRENT SENSOR

References	Description	LP (₹)
48290500G	TE-18 20A SOLID CORE	On request
48290501G	TE-18 63A SOLID CORE	On request
48290502G	TE-25 160A SOLID CORE	On request
48290503G	TE-35 250A SOLID CORE	On request
48290504G	TE-45 630A SOLID CORE	On request
48290505G	TE-55 1000A SOLID CORE	On request
48290506G	TE-90 2000A SOLID CORE	On request



OPEN TYPE CURRENT SENSOR

References	Description	LP (₹)
48290551G	TR-10 75A/100MV SPLIT CORE	On request
48290552G	TR-16 100A/100MV SPLIT CORE	On request
48290553G	TR-24 200A/100MV SPLIT CORE	On request
48290554G	TR-36 600A/100MV SPLIT CORE	On request





Measurement and energy management

CURRENT SENSING MODULE



References	Description	LP (₹)
48290110G	I-30 3xl METERING	On request
48290111G	I-31 3xl METERING + TREND	On request
48290112G	I-60 6xl METERING	On request
48290113G	I-61 6xl METERING + TREND	On request
48290128G	I-33 3xl MONITORING	On request
48290130G	I-35 3xl ANALYSIS	On request
48290129G	I-43 4xl MONITORING 2I/2O	On request
48290131G	I-45 4xl ANALYSIS 2I/2O	On request

FLEXIBLE CURRENT SENSOR



References	Description	LP (₹)
48290570G	TF-55 600A ROGOWSKI	On request
48290571G	TF-120 2000A ROGOWSKI	On request
48290572G	TF-300 6000A ROGOWSKI	On request

RJ45 CABLES



References	Description	LP (₹)
48290181G	RJ45-0.32 feet / 0.10m CABLE	On request
48290188G	RJ45-0.64 feet / 0.20m CABLE	On request
48290182G	RJ45-1.64 feet / 0.50m CABLE	On request
48290183G	RJ45-3.28 feet / 1m CABLE	On request
48290184G	RJ45-6.56 feet / 2m CABLE	On request
48290186G	RJ45-16.4 feet / 5m length CABLE	On request
48290187G	RJ45-32.8 feet / 10m length CABLE	On request
48290185G	RJ45 cables for BUS Digiware 164 feet / 50 m + 50 connectors	On request

RJ12 CABLES



References	Description	LP (₹)
48290580G	RJ12 3x0.1m CABLE	On request
48290581G	RJ12 3x0.2m CABLE	On request
48290582G	RJ12 3x0.3m CABLE	On request
48290583G	RJ12 3x1m CABLE	On request
48290584G	RJ12 3x2m CABLE	On request
48290585G	RJ12 4x0.1m CABLE	On request
48290586G	RJ12 4x0.2m CABLE	On request
48290587G	RJ12 4x0.3m CABLE	On request
48290588G	RJ12 4x1m CABLE	On request
48290589G	RJ12 4x2m CABLE	On request
48290590G	RJ12 6x0.1m CABLE	On request
48290591G	RJ12 6x0.2m CABLE	On request
48290592G	RJ12 6x0.3m CABLE	On request
48290593G	RJ12 6x1m CABLE	On request
48290594G	RJ12 6x2m CABLE	On request
48290595G	RJ12 3x0.5m CABLE	On request
48290596G	RJ12 4x0.5m CABLE	On request
48290597G	RJ12 6x0.5m CABLE	On request
48290602G	RJ12 1 cable of 16.6ft/5m	On request
48290603G	RJ12 1 cable of 32.8ft/10m	On request
48290601G	RJ12 1 Cable of 164ft/50m and 50 connectors	On request

ACCESSORIES

References	Description	LP (₹)
48290049G	SEALING KIT DIRIS B30	On request
48290050G	USB CONFIGURATION CABLE	On request
48290180G	END LINE RESISTANCE RJ45	On request
48290598G	SPLICE PLATE x30	On request
48290599G	CT/5A to 100 MV ADAPTOR	On request
48290600G	SEALABLE COVER x20	On request
48290280G	RJ9 1x1,5m	On request
48290281G	RJ9 1x3m	On request

SOCOMEK India

General terms and conditions

1. PRICES

All Prices are mentioned in Indian Rupees. Prices are subjected to change without any prior notice and will be applicable as prevailing at the time of Dispatch. This Price list is effective from July 1st 2017 and supersedes any previous price list.

2. TAXES & DUTIES

The prices are exclusive of all taxes

We will charge applicable Goods and Services Tax ("GST") on our supplies

In the event of variations in rate of tax, rules and/or method of assessment under the GST, the prices will be adjusted accordingly.

It will be the responsibility of customer to communicate its correct GSTIN to the Company. Company will not be responsible in case incorrect GSTIN is communicated to us and tax is deposited by us on GSTIN available in Company's record

3. WARRANTY

The Company warrants the goods against all proven defects or hidden defects in design and manufacturing. The period of warranty is 12 months from date of invoicing or 18 months from date of manufacturing. The warranty shall be strictly limited to Socomec products and does not extend to the equipment within which these products may be integrated or not to the performance of such equipment. The Company's warranty shall be limited, in its discretion, to the repair or replacement at its expense in its factory of all part of the goods recognized as defective. Defective items replaced free of charge shall be made available to the company and shall become its property. The warranty shall not be applicable:

- 3.1 In the event that the defect if due to the material supplied by the buyer, or due to design imposed by it.
- 3.2 In the event of damage or accident due to the transport or arising from negligence, defective installation, supervision or maintenance by the buyer or a third party.
- 3.3 In the event of use, installation or storage of the goods in abnormal conditions which are not in compliance.
- 3.4 In the event of any changes, adjustments or repairs carried out by buyer without express agreement of the company.

The warranty does not cover the replacement or repair of items which are due to the fault of the buyer or third party.

Socomec worldwide

IN INDIA

CORPORATE OFFICE

B1, II Floor
Thiru-Vi-Ka Industrial Estate
Guindy, Chennai - 600 032
Tel: +91 44 3921 5400 / 5423 / 5466
Mob: +91 9711229993, +91 9790968731
info.in@socomec.com

MANUFACTURING FACILITY

756 Pace City II
Sector 37
Gurgaon - 122 001
Haryana
Tel: +91 124 4562700, 4597803
Fax: +91 124 4562733
CIN: U00000HR1999PTC038504

BRANCH OFFICES

BANGALORE

160, Arun Arch, 2nd Floor
9th Cross, Indiranagar First Stage
Bangalore - 560 038
Tel: +91 80 41739101-03
Mob: +91 9972578171, +91 9886323448

COCHIN

47/590, Mattathumkattil
Narayanan Asan Road
Ponnurrunni, Vyttila
Cochin - 682019
Mob: +91 9745012322, +91 8939550688

COIMBATORE

12, 3rd Cross Street
Lakshmipuram, Ganapathy
Coimbatore - 641 006
Mob: +91 8939550688, +91 9003032012

HYDERABAD

3rd Floor
6-3-652/K/12, KAUTILYA Complex
Somajiguda
Hyderabad - 500 082
Mob: +91 9959444277, +91 9642528800

KOLKATA

AK-257, Sector-2
Salt Lake City, Kolkata - 700091
Mob: +91 9836405558, +91 8697709095

MUMBAI

Office No.404, 4th Floor
"C" Wing, Neelkanth Business Park
Nr. Vidyavihar Station, Vidyavihar (W)
Mumbai - 400 086
Tel: +91 9987052602, +91 8879791802

NEW DELHI

Plot No 100, 1st Floor
Okhla Industrial Estate Phase III
New Delhi - 110020
Tel: +91 11 40884000
Mob: +91 9958591713, +91 9953595413

PUNE

Plot No. 30, Wireless
Co-operative Society
Behind Convergys, Aundh
Pune 411 007
Telefax: +91 20 25881587
Mob: +91 9987052604, +91 9423204106

RESIDENT OFFICES

AHMEDABAD

+91 9727753931
+91 9376639333

CHANDIGARH

+91 9023154784

TRIVANDRUM

+91 9020179364

VADODARA

+91 9099947988

IN EUROPE

BELGIUM

FRANCE

GERMANY

ITALY

NETHERLANDS

POLAND

PORTUGAL

ROMANIA

SLOVENIA

SPAIN

SWITZERLAND

UNITED KINGDOM

TURKEY

IN ASIA PACIFIC

AUSTRALIA

CHINA

INDONESIA

SINGAPORE

THAILAND

IN MIDDLE EAST

UNITED ARAB EMIRATES

IN AMERICA

USA, CANADA & MEXICO

OTHER COUNTRIES

www.socomec.co.in/worldwide

HEAD OFFICE

SOCOMECH GROUP

SAS SOCOMEC capital 10686000 €
R.C.S. Strasbourg B 548 500 149
B.P. 60010 - 1, rue de Westhouse
F-67235 Benfeld Cedex - FRANCE
Tel. +33 3 88 57 41 41
Fax +33 3 88 74 08 00
info.scp.isd@socomec.com

YOUR DISTRIBUTOR / PARTNER

www.socomec.co.in

your energy
our expertise



socomec
Innovative Power Solutions