

HIKOKI

HIGH PERFORMANCE POWER TOOLS

POWER TOOL CATALOGUE 2025 - 2026



Innovation never stops

Ever since 1948 we've been designing and developing high performance power tools. For over 70 years our Japanese engineers have utilized their technological knowledge, skills and experience to constantly improve our power tools. Guided by Japanese design principles, every element of our products is chosen to improve performance, balance, usability, longevity and control. Attention to details that ensures the professional in finishing every single job as easy as possible. That's what drives us and keeps us one step ahead.

HIKOKI
HIGH PERFORMANCE POWER TOOLS

We proudly introduce to you our 2023-2024 catalogue. Have a look at this year's HiKOKI high performance power tools. All bundled in a clear book. Some you may already know, some are provided with the newest designs and latest technologies our in-house designers and engineers have been working on.



Cordless

Chargers/
Batteries

Drilling

Demolition

Fastening

Grinding

Polishing &
Sanding

Sawing

Cutting

Planing &
Routing

Miscellaneous

Pneumatic

**Contents.
Everything
to reach
the highest
performance.**

Introduction	2	Demolition		
Contents	4	Rotary Hammer	54	Cordless
General Information	6	Demolition Hammer	59	
Index	8	Fastening		Chargers/ Batteries
Technologies	10	Screw Driver	62	
Innovative Highlights	12	Impact Wrench	62	
Cordless		Grinding		Drilling
Driver Drill	14	Disc Grinder	64	
Impact Driver Drill	15	Hand Grinder	69	
Impact Driver	16	Polishing & Sanding		Demolition
100 mm Disc Grinder with Slide Switch	19	Sander Polisher	71	
125 mm Disc Grinder with Slide Switch	19	Orbital Sander	71	
Die Grinder	19	Sawing		Fastening
Caulking Gun	20	Circular Saw	74	
Heat Gun	21	Miter Saw	75	
Planer	21	Jig Saw	76	
Blower	22	Reciprocating Saw	77	
Impact Wrench	24	Chain Saw	78	
Recipocating Saw	25	Cutting		Grinding
Band Saw	25	Cutter	78	
Work Light	26	Cut-off Machine	79	
Cut-Out Tool	26	Planing & routing		Polishing & Sanding
Cleaner	27	Planer	79	
Cooler & Warmer Box	28	Router	81	
Multivolt Driver Drill	32	Pressure Washer		Sawing
Multivolt Impact Driver Drill	33	Pressure Washer	82	
Multivolt Impact Driver	34	Miscellaneous		Cutting
Multivolt Impact Wrench	36	Nibbler	84	
Multivolt Disc Grinder with Slide Switch	38	Blower	84	
Multivolt Recipocating Saw	41	Mixer	84	
Multivolt Chain Saw	42	Heat Gun	85	
Multivolt Hedge Trimmer	43	Table Saw	86	
Multivolt Grass Trimmer	44	Pneumatic		Planing & Routing
Multivolt Blower	45	Compressor	86	
Charger				Miscellaneous
Charger	46			
Battery				Pneumatic
Battery	48			
Tool Kit				
10mm Tool Kit	51			
13mm Tool Kit	51			
Drilling				
Drill	51			
Impact Drill	52			

**General
information.
Good to know
before reading.**

Safety

Double-Insulation power tool, indicated by the double square mark (□) can be operated without external grounding. All HiKOKI power tools are designed and manufactured considering safety and usability. HiKOKI power tools are provided with various safety features like brakes, covers and clutches.

General precautions

1. Read and follow handling instructions provided with the power tool and comply with all the operating instructions and warnings.
2. Never let children use the power tool.
3. Keep others, especially children, away from the tool.
4. Wear eye protector to protect the eyes.
5. Never touch blades or cutters during operation.
6. Avoid unintentional contact with the power switch when the tool is connected to a power source.
7. To ensure proper function of the tool, DO NOT remove installed covers or screws. DO NOT modify components and parts.
8. Prior to operation, carefully inspect the tool to ensure all the parts properly functioning.
9. Immediately stop operation if abnormalities are noted.
10. Ensure that motor ventilation opening is kept fully open.
11. Always keep the blades and cutters sharp and clean.
12. Have the power tool inspected at a proper regular interval by an authorized Service Center.
13. Maintain the proper care and cleanliness of the power tool.
14. Consult an authorised Service Center for repair and/or part replacement.
15. DO NOT use the power tool for any other application than those specified in the handling instructions.
16. DO NOT use the tool for work beyond its prescribed capability.
17. To avoid possible electric shock, DO NOT use the power tool in wet areas.
18. Ensure that the applied voltage is the same as that specified on the nameplate.
19. Ensure that electric plug is plugged into a matching receptacle that is properly installed and grounded in accordance with the instruction manual, all applicable local codes, and ordinances, except for double insulated tools.
20. Ensure that the power supply is disconnected after operation.
21. DO NOT lift the power tool with the cord or remove the plug from the receptacle by pulling the cord.
22. Always handle the power tool with care.
23. Proper posture is essential for safe operation.
24. Dress properly and work in proper clothing and shoes.
25. Always keep the work area in good order.
26. When not in use, store the power tool.
27. DO NOT stare into LASER beam.

Power input

HiKOKI power tools employ series motors whose modern design is based on our many years of experience. Unless otherwise indicated in the catalogue, power input (Watt) is based on 110V to 240V.

Guarantee

The primary concern of Koki Holdings is the convenience and satisfaction of the customer. To this end, each HiKOKI power tool is carefully tested and inspected, and is guaranteed against any defects in workmanship and materials. Defects in workmanship and materials – not attributable to wear and tear, overloading, abusive treatment, unauthorised modification or careless handling — will be repaired or replaced without charge.

Icons

	Single Insulation		Blower Function
	Double Insulation		Dust Extracting Type
	Electronic Constant Speed Control		Deep Cut
	Electronic Soft Start Control		White LED Lamp
	Variable Speed		SDS max Shank
	2-speed Gear		SDS-plus Shank
	Multi-Speed Settings		Hex Shank
	Reversible		Hex Shank
	Slip Clutch		Brake
	Orbital Cutting Action		Brake
	Random Orbit Action		Rotation only
	Spindle Lock		Rotation & Hammering
	Shock-Absorbing Handle Type		Hammering only
	Carry Case		
	17mm hex shank		
	28.5mm hex shank		
	30mm hex shank		

INDEX

A			
AC 18DA	Cordless Caulking Gun	20	
AW 100	Pressure Washer	82	
AW 130	Pressure Washer	82	
AW 150	Pressure Washer	83	
B			
BSL 1220M	Battery	49	
BSL 1240M	Battery	48	
BSL 1820M	Battery	48	
BSL 1840M	Battery	48	
BSL 1850MA	Battery	48	
BSL 36A18	Battery	49	
C			
C 10FCE2	Miter Saw	75	
C 10RJ	Table Saw	86	
C 12FDHB	Miter Saw	75	
C 7SS	Circular Saw	74	
C 7ST	Circular Saw	74	
C 9SA3	Circular Saw	74	
CB 18DBL	Cordless Band Saw	25	
CC 14STA	Cut-off Machine	79	
CC 14STD	Cut-off Machine	79	
CC 14STDU	Cut-off Machine	79	
CG 36DB	Cordless Grass Trimmer	44	
CH 3656DA	Cordless Hedge Trimmer	43	
CJ 90VST2	Jig Saw	76	
CM 4SB2	Cutter	78	
CM 4ST	Cutter	78	
CN 16SA	Nibbler	84	
CR 13V2	Reciprocating Saw	66	
CR 18DBL	Cordless Reciprocating Saw	25	
CR 36DA	Cordless Reciprocating Saw	41	
CS 3635DB	Cordless Brushless Chain Saw	42	
CS 40Y	Chain Saw	78	
D			
D 10VSTA	Drill	51	
D 13VH	Drill	51	
DB 10DL	Cordless Driver Drill	14	
DB 3DL2	Cordless Driver Drill	14	
DH 22PBS	Rotary Hammer	54	
DH 24PG2	Rotary Hammer	54	
DH 26PB2	Rotary Hammer	54	
DH 26PC2	Rotary Hammer	55	
DH 28PBY2	Rotary Hammer	55	
DH 28PCY2	Rotary Hammer	55	
DH 40MC	Rotary Hammer	56	
DH 45MA	Rotary Hammer	56	
DH 45ME	Rotary Hammer	56	
DH 52ME	Rotary Hammer	57	
DS 12DA	Cordless Driver Drill	14	
DS 18DA	Cordless Driver Drill	15	
DS 18DE	Cordless Driver Drill	15	
DS 36DA	Cordless Driver Drill	31	
DS 36DC	Cordless Driver Drill	32	
DV 10VST	Impact Drill	52	
DV 13VSS	Impact Drill	52	
DV 16V	Impact Drill	52	
DV 18DC	Cordless Impact Driver Drill	16	
DV 36DA	Cordless Impact Driver Drill	33	
E			
EC 68	Compressor	86	
F			
FCJ 65V3	Jig Saw	76	
G			
G 10SN2	Disc Grinder	64	
G 10SS2	Disc Grinder	64	
G 10VE2	Disc Grinder	65	
G 13SB4	Disc Grinder	65	
G 13SR4	Disc Grinder	66	
G 13SW	Disc Grinder	66	
G 15SA2	Disc Grinder	66	
G 1810DA	Cordless 100 mm Disc Grinder with Slide Switch	19	
G 1813DA	Cordless 125 mm Disc Grinder with Slide Switch	19	
G 18BYE	Disc Grinder	67	
G 18SE4	Disc Grinder	68	
G 18SH2	Disc Grinder	67	
G 18ST	Disc Grinder	67	
G 18SW2	Disc Grinder	68	
G 23SC4	Disc Grinder	69	
G 23ST	Disc Grinder	68	
G 3610DA	Cordless Disc Grinder with Slide Switch	38	
G 3610DVE	Cordless Disc Grinder	39	
G 3618DA	Cordless Disc Grinder with Slide Switch	40	

GP 18DA	Cordless Die Grinder	19	UC 18YFSL	Charger	47	Cordless
			UC 18YG	Charger	47	
H			UC 18YGL2	Charger	47	
H 60ME	Demolition Hammer	60	UC 18YRL	Charger	47	
H 65SB3	Demolition Hammer	60	UC 18YSL3	Charger	47	
H 90SG	Demolition Hammer	61	UL 18DA	Cordless Cooler & Warmer Box	28	Chargers/ Batteries
H41 MB2	Demolition Hammer	59	UM 12VST2	Mixer	84	
H41 SST	Demolition Hammer	59	UM 16VST2	Mixer	85	
H60 MC (V)	Demolition Hammer	59				
M			V			Drilling
M 12SA2	Router	81	VTP 18	Impact Drill	52	
M 12SC	Router	81				
M 18DYA	Cordless Cut-Out Tool	26	W			Demolition
			W 6VA4	Screw Driver	62	
P			WH 12DA	Cordless Impact Driver	17	Fastening
P 20ST	Planer	79	WH 12DD	Cordless Impact Driver	17	
P 18DSL	Cordless Planer	21	WH 18DA	Cordless Impact Driver	17	
PDA-100M	Disc Grinder	64	WH 18DC	Cordless Impact Driver Drill	18	Grinding
PDA-125M	Disc Grinder	65	WH 18DE	Cordless Impact Driver	18	
PH 65A	Demolition Hammer	60	WH 36DB	Cordless Impact Driver	34	Polishing & Sanding
			WH 36DC	Cordless Impact Driver	35	
R			WH 7DL	Cordless Impact Driver	16	Sawing
R 18DSL	Cordless Cleaner	27	WR 18DF	Cordless Impact Wrench	24	
RB 18DC	Cordless Blower	22	WR 18DH	Cordless Impact Wrench	24	Cutting
RB 36DA	Cordless Blower	45	WR 18DSDL	Cordless Impact Wrench	24	
RB 40SA	Blower	84	WR 22SE	Impact Wrench	62	
RH 18DA	Cordless Heat Gun	21	WR 25SE	Impact Wrench	62	Planing & Routing
RH 600T	Heat Gun	85	WR 36DF	Cordless Impact Wrench	36	
RH 650V	Heat Gun	85	WR 36DG	Cordless Impact Wrench	37	
S						Miscellaneous
S 15SB	Sander Polisher	71				
SAT 180	Sander Polisher	71				Pneumatic
SB 8V2	Orbital Sander	72				
SP 18VA	Sander Polisher	71				
SV 12SG	Orbital Sander	72				
SV 13YA	Orbital Sander	72				
T						
Tool Kit 10mm		51				
Tool Kit 13mm		51				
U						
UB 18DC	Cordless Work Light	26				
UC 3SFL	Charger	46				
UC 7SL	Charger	46				
UC 10SL2	Charger	46				
UC 12SL	Charger	46				



Technologies

At HiKOKI we believe that not only the design and overall look and feel of each power tool contributes to an increased comfort and ease of use. It's the technology inside that makes the next power tool and job for the professional even better than before.

BRUSHLESS

Due to the more compact designs compared to brushed motors, the brushless motors permit reductions in size and weight of tools for easier handling. Even under heavy use, the brushless motors significantly extend the product life cycles without causing troubles such as armature burnout, layer short or commutator wear. Plus, they do not require the regular replacement of carbon brushes.



One battery pack, two volt classes - the new and innovative MULTI VOLT battery packs. The 36V Lithium-ion battery packs are compatible with 18V class cordless tools. Intelligent connecting technology make it possible. Depending on the tool, the voltage automatically switches to 18V or 36V.

12V PEAK

The new compact and lightweight 10.8 - 12V Peak slide Lithium-ion battery packs are compatible with the new 10.8 - 12V Peak cordless tools.

Li-ion

A built in electronic control circuit for Lithium-ion battery pack is unique. This circuit provides the protection system available to protect and enhance the performance of these batteries. By always keeping the batteries within safe operating conditions, this electronic control ensures that batteries accept more charges than conventional batteries.

UVP USER VIBRATION PROTECTION

UVP (User Vibration Protection) combines internal vibration absorbers and shock absorbing handles for reduced vibration, and improved operating efficiency.

LVH LOW VIBRATION HANDLE

LVH (Low Vibration Handle) consists of the upper unit with rubber dampers and the lower unit with a hinge to reduce vibration and user fatigue.

IP56

International Protection (IP) is a standard developed by the International Electrotechnical Commission (IEC) to indicate the degrees of protection provided by enclosures of electrical equipment against access to hazardous parts, ingress of solid foreign objects and ingress of water.

AHB ALUMINIUM HOUSING BODY

The internal double-insulation construction with an aluminum die-cast body and a plastic stator holder.

RFC REACTIVE FORCE CONTROL

When the tool bit is suddenly overburdened during operation, RFC (Reactive Force Control) stops the motor to reduce twisting of the main unit.

TRIPLE HAMMER

The triple hammer has three anvils, making three impacts per rotation instead of the conventional two. This results in reduced vibration and greater comfort with less screw head slippage (cam-out).

OIL PULSE

Oil Pulse impact drivers use a hydraulic pressure system to generate impact force resulting in high performance with low-noise, low kick-back and reduced cam-out.

LED LEVEL

A built-in acceleration sensor detects when the tool is tilted and notifies the user to adjust the angle of the tool to achieve a vertical hole (+/-5°) and increase drilling efficiency.

XLED™ XACT CUT LED

The XACT CUT LED lighting system uses an LED light to cast a shadow where the blade will cut on the material for precise and efficient cutting.

AIR SPRING DRIVE SYSTEM

The Air Spring Drive System uses compressed air to drive each nail providing a pneumatic-like feel and resulting in powerful driving force, quick response, consistent driving depth, and low recoil.

BRUSHLESS

AC Brushless Motor series

Long-lasting efficiency.

The professional no longer has to worry about losing voltage and power when using an extension cord. Our AC Brushless Motor series feature electronic control that offers continuous and constant power output. This technology brings a whole new level of performance and durability to our heavy duty range of power tools. With the innovative AC Brushless Motor you'll experience more power and less energy consumption.

We have also eliminated some major wearing parts, which means a compact and lightweight power tool, less wear and tear and less maintenance. This also contributes to the fact that the motor lasts longer and operates far more efficiently than conventional brushed motors.

HIKOKI



CORDLESS TOOLS

CORDLESS DRIVER DRILLS

Cordless

Chargers/
Batteries

Drilling

Demolition

DB 3DL2

3.6V Cordless Driver Drill

Li-ion



Features

- Convertible to use in angled or straight
- Spindle lock mechanism
- Adjustable clutch: 21-stage torque
- Equipped with battery protection circuit
- With LED light



Specifications		
Drive	6.35mm Hex Bit Shank	
Capacity	Mid Steel	5mm
	Wood Screw (D x L)	3.8 x 38mm
	Machine Screw	5mm
Battery Voltage	3.6V	
No Load Speed	High	600/min
	Low	200/min
Torque Setting	0.3 - 2.9Nm	
Overall Length	Straight	268mm
	Angled	210mm
Weight	0.45kg	
Standard Accessories*	2 Batteries (EBM315), Charger (UC3SFL), Driver Bit, Carrying Case	

*Standard accessories may vary by country or area

MRP: ₹ 8,760/-

Fastening

DB 10DL

10.8V Cordless Driver Drill

Li-ion



Features

- Adjustable clutch: 21-stage torque
- Soft grip handle
- Compact & light weight



Specifications		
Drive	6.35mm Hex Bit Shank	
Capacity	Soft wood	18mm
	Wood Screw (D x L)	6mm x 38mm
	Machine Screw	6mm
Battery Voltage	10.8V	
No Load Speed	0-400/min	
Maximum Torque in lock	10Nm	
Torque Setting and Clutch	1.0-6.0Nm	
Overall Length	147mm	
Weight	0.8kg	
Standard Accessories*	Battery (BCL1015 / BCL1030C), Charger (UC10SL2), Driver Bit, Carrying Case	

*Standard accessories may vary by country or area

MRP: ₹ 15,660/-

Grinding

Polishing &
Sanding

Sawing

Cutting

DS 12DA

10.8-12V Peak Cordless Driver Drill

12V PEAK
Li-ion



Features

- 20-stage Clutch
- LED light
- Compact & light weight
- Keyless chuck



Specifications		
Drill Chuck	0.8-10mm Keyless	
Capacity	Mild Steel	10mm
	Soft Wood	29mm
	Wood Screw	5.8mm
	Machine Screw	6mm
Battery Voltage	10.8-12V Peak	
No Load Speed	High	0-1,400/min
	Low	0-350/min
Max Torque Hard	38Nm	
Max Torque Soft	15Nm	
Torque Setting	0.6 -4.0Nm	
Overall Length	166mm	
Weight	1.1kg with BSL1225M/BSL1215	
	1.2kg with BSL1240M	
Standard Accessories*	2 Batteries (BSL1225M), Charger (UC12SL), Battery Cover, Carrying Case	

*Standard accessories may vary by country or area

MRP: ₹ 20,000/-

Planing &
Routing

Miscellaneous

Pneumatic



DS 18DA
18V Cordless Driver Drill

Li-ion

Features

- Compact and lightweight
- High capacity battery with battery level indicator
- 20 Stage clutch
- 2 Speed gear

Specifications		
Drill Chuck	2.0-13mm Keyless	
Capacity	Mild Steel	13mm
	Soft Wood	36mm
	Wood Screw (D X L)	6 x 75mm
	Machine Screw	6mm
Battery Voltage	18V	
No Load Speed	High	0-1,400/min
	Low	0-350/min
Max Torque Hard	50Nm	
Max Torque Soft	18Nm	
Overall Length	173mm	
Weight	Kg	1.3kg (BSL1820M), 1.9kg (BSL36B18)
Standard Accessories*	2 Batteries (BSL1820M), Charger (UC18YKSL / UC18YSL3), Driver Bit, Battery Cover, Carrying Case	

*Standard accessories may vary by country or area

MRP: ₹ 17,500/-



DS 18DE
18V Cordless
Driver Drill



RFC*
REACTIVE FORCE CONTROL
BRUSHLESS

Features

- 155 mm compact head
- Easy to Use in Tight Spaces
- Drills Fast and Easy
- Reactive Force Control

Specifications		
Drill Chuck	1.5 - 13mm Keyless	
Capacity	Brick	13mm
	Mild Steel	13mm
	Soft Wood	52mm
	Wood Screw (DxL)	10x100mm
	Machine Screw	6mm
Battery Voltage	18V	
No Load Speed	High	0-2000/min
	Low	0-550/min
Max Torque	High	70Nm
	Soft	40Nm
Overall Length	155mm	
Weight	1.7kg (with BSL1840M) 1.9kg (with BSL1850MA / BSL36A18) 2.2kg (with BSL36B18)	
Standard Accessories*	2 Batteries (BSL1840M / BSL1850MA / BSL36A18), Charger (UC18YFSL / UC18YSL3), Driver Bit, Hook, Battery Cover, Carrying Case	

*Standard accessories may vary by country or area

MRP: ₹ 14,620/-
(Bare Tool)-



DV 18DC
18V Cordless Impact Driver Drill

Li-ion
BRUSHLESS
RFC
REACTIVE FORCE CONTROL

Features

- 190 mm compact head
- Side handle is easy to use and easily adjustable at 11 different positions



Specifications		
Drill Chuck	1.5 - 13mm Keyless	
Capacity	Brick	20mm
	Mild Steel	16mm
	Soft Wood	102mm
	Wood Screw (DxL)	12x100 mm
	Machine Screw	6mm
Battery Voltage	18V	
No Load Speed	High	0-2,000/min
	Low	0-500/min
Impact Rate	0-30,000/min	
Max Torque	Hard	140Nm
	Soft	70Nm
Overall Length	190mm	
Weight	2.6kg (with BSL1840M)	
	2.8kg (with BSL36A18 / BSL1850MA)	
	3.1kg (with BSL36B18)	
Standard Accessories*	2 Batteries (BSL36A18 / BSL1850MA / BSL1840M), Charger (UC18YSL3 / UC18YFSL), Driver Bit, Side Handle, Hook, Battery Cover, Carrying Case	

*Standard accessories may vary by country or area

MRP: ₹ 45,946/-

WH 7DL
7.2V Cordless
Impact Driver

Can be converted from L shape to straight shape.



Li-ion

Features

- Convertible to use in angled or straight
- Automatic spindle lock mechanism for manual tightening



Specifications		
Capacity	Bolt	3-8mm
	High Tension Bolt	3-6mm
	Small Screw	3-8mm
Drive	6.35mm Hex Bit Shank	
Tightening Torque	25Nm	
Battery Voltage	7.2V	
No Load Speed	0-2,400/min	
Full Load Impact Rate	0-3,000/min	
Overall Length	Straight	282mm
	L shape	211mm
Weight	0.59kg	
Standard Accessories*	Batteries (BCL715), Charger (UC7SL), Battery Cover, Carrying Case	

MRP: ₹ 16,140/-

*Standard accessories may vary by country or area



Brake



Variable Speed



Reversible



2-speed Gear

WH 12DA
10.8-12V Peak
Cordless Impact Driver



12V PEAK
Li-ion

Features

- Slim handle with soft grip
- LED light
- Compact & light weight



Specifications		
Capacity	Bolt	5-12mm
	High Tension Bolt	5-10mm
	Small Screw	4-8mm
Drive	6.35mm Hex Bit Shank	
Tightening Torque	110Nm	
Battery Voltage	10.8-12V Peak	
No Load Speed	0-2,700/min	
Full Load Impact Rate	0-3,200/min	
Overall Length	150mm	
Weight	1.1kg (with BSL1225M / BSL1215) - 1.2kg (with BSL1240M)	
Standard Accessories*	2 Batteries (BSL1220M / BSL1225M), Charger (UC12SL), Driver Bit, Carrying Case	

*Standard accessories may vary by country or area

MRP: ₹ 10,000/-
(Bare Tool)

WH 12DD
10.8-12V Peak
Cordless Impact Driver



12V PEAK
Li-ion
BRUSHLESS

Features

- 134mm compact head
- 3 tightening modes (soft/power/self-drilling screw)
- LED Light



Specifications		
Capacity	Bolt	5-14mm
	High Tension Bolt	5-12mm
	Small Screw	4-8mm
	Self drilling Screw	3.5-5mm
Drive	6.35mm Hex Bit Shank	
Tightening Torque	135Nm	
Battery Voltage	10.8-12V Peak	
No Load Speed	Power Mode	0-3,200/min
	Soft Mode	0-1,300/min
	Self Drilling Screw Mode	0-3,200/min
Impact Rate	Power Mode	0-4,000/min
	Soft Mode	0-2,500/min
	Self Drilling Screw Mode	0-4,000/min
Overall Length	134mm	
Weight	1.1kg	
Standard Accessories*	2 Batteries (BSL1240M), Charger (UC12SL), Battery Cover, Carrying Case	

*Standard accessories may vary by country or area

MRP: ₹ 22,000/-

WH 18DA
18V
Cordless Impact Driver



Li-ion

Features

- Compact and lightweight
- High capacity battery with battery level indicator
- LED light
- Easy to use in tight spaces



Specifications		
Capacity	Machine Screw	4 - 8mm
	Bolt	M5 - M14
	High Tension Bolt	M5 - M12
Tightening Torque	140Nm	
Battery Voltage	18V	
No Load Speed	0 - 2,700/min	
Impact Rate	0 - 3,600/min	
Overall Length	150mm	
Weight	1.3kg (with BSL1820M)- 1.9kg (with BSL36B18)	
Standard Accessories*	2 Batteries (BSL1820M), Charger (UC18YSL3 / UC18YKSL), Battery Cover, Carrying Case	

*Standard accessories may vary by country or area

MRP: ₹ 22,000/-



Brake



Variable Speed



Reversible

Cordless
Chargers/
Batteries
Drilling
Demolition
Fastening
Grinding
Polishing &
Sanding
Sawing
Cutting
Planing &
Routing
Miscellaneous
Pneumatic

CORDLESS IMPACT DRIVER

Cordless

Chargers/
Batteries

Drilling

Demolition

Fastening

Grinding

Polishing &
Sanding

Sawing

Cutting

Planing &
Routing

Miscellaneous

Pneumatic

WH 18DC 18V Cordless Impact Driver

Features

- Bright 3 LEDs working light
- Powerful brushless motor delivers fast tightening speed.
- 5 Tightening modes with Triple Hammer
- IP56 dust & water resistance

Specifications		
Capacity	Small Screw	4 - 10mm
	Ordinary Bolt	5 - 18mm
	High Strength Bolt	5 - 14mm
	Self Drilling Screw	∅3.5 - ∅6mm
Drive	6.35mm	
Max. Tightening Torque	210Nm	
Battery Voltage	18V	
No Load Speed	Soft Mode	0 - 900/min
	Power Mode	0 - 3,400/min
	Bolt Mode	0 - 2,900/min
	Bolt Single Mode	0 - 2,900/min
	Self Drilling Screw Mode	0 - 3,700/min
Impact Rate	Soft Mode	0 - 1,900/min
	Power Mode	0 - 4,000/min
	Bolt Mode	0 - 4,000/min
	Bolt Single Mode	0 - 4,000/min
	Self Drilling Screw Mode	0 - 2,100/min
Overall Length	114mm	
Weight	1.6kg (BSL36A18), 1.9kg (BSL36B18)	
Standard Accessories*	2 Batteries (BSL36A18), Charger (UC18YSL3), Battery Cover, Hook, Carrying Case	

*Standard accessories may vary by country or area

MRP: ₹ 42,500/-



BRUSHLESS
Li-ion IP56
TRIPLE HAMMER



WH 18DE 18V Cordless Impact Driver

Li-ion
BRUSHLESS

Features

- Compact, simple and easy to use
- Stays running at low speeds and are suitable for delicate work
- Highly responsive trigger switch



Specifications		
Capacity	Small Screw	4 - 8mm
	Ordinary Bolt	5 - 16mm
	High Strength Bolt	5 - 12mm
Drive	6.35mm	
Tightening Torque	175Nm	
Battery Voltage	18V	
No Load Speed	0 - 3,100/min	
Impact Rate	0 - 3,400/min	
Overall Length	120mm	
Weight	1.5kg (BSL1840M) 1.6kg (BSL1850MA) 1.9kg (BSL36B18)	
Standard Accessories*	Batteries (BSL1840M), Charger (UC18YSL3), Hook, Battery Cover, Carrying Case	



*Standard accessories may vary by country or area

MRP: ₹ 18,400/- (Bare Tool)



G 1810DA

18V Cordless 100 mm

Disc Grinder with Slide Switch



Li-ion
BRUSHLESS

Features

- 750W max output
- Small grip circumference
- Easy to maintain mesh dust filter
- Kickback protection
- Restart protection



Specifications		
Capacity	Wheel Dia	100mm
	Hole Dia	16mm
	Thickness	6mm
Spindle Thread	M10 x 1.5	
Battery Voltage	18V	
No Load Speed	8,000/min	
Overall Length	358mm	
Weight	2.4kg (with BSL1850MA)	
	2.8kg (with BSL36B18)	
Standard Accessories*	2 Batteries (BSL1850MA), Charger (UC18YSL3), Side Handle, Depressed Center Wheel, Wrench, Battery Cover, Carrying Case	

*Standard accessories may vary by country or area

MRP: ₹ 35,200/-

G 1813DA

18V Cordless 125 mm

Disc Grinder with Slide Switch



Li-ion
BRUSHLESS

Features

- 750W max output
- Small grip circumference
- Easy to maintain mesh dust filter
- Kickback protection
- Restart protection



Specifications		
Capacity	Wheel Dia	125mm
	Hole Dia	22.23mm
	Thickness	6mm
Spindle Thread	M14 x 2	
Battery Voltage	18V	
No Load Speed	8,000/min	
Overall Length	358mm	
Weight	2.7kg (with BSL1850MA)	
	3.1kg (with BSL36B18)	
Standard Accessories*	2 Batteries (BSL1850MA), Charger (UC18YSL3), Side Handle, Depressed Center Wheel, Wrench, Battery Cover, Carrying Case	

*Standard accessories may vary by country or area

MRP: ₹ 37,200/-

GP 18DA

Cordless Die Grinder

Li-ion
BRUSHLESS



Features

- Variable speed dial with auto mode
- Brake
- Soft Start
- Overload protection
- Kickback protection
- Anti-restart protection



Specifications		
Capacity	Collet Chuck	6mm
	Max. Wheel	50mm
Switch type	Slide (On Side)	
Battery Voltage	18V	
No Load Speed	7,000 - 29,000/min	
Overall Length	464mm (with BSL36A18)	
Weight	2.8kg (With BSL36A18)	
Standard Accessories	2Batteries (BSL36A18), Charger (UC18YFSL), Collet Chuck, Wrenches, Battery Cover, Carrying Case	

*Standard accessories may vary by country or area

MRP: ₹ 47,975/-



Electronic Soft Start Control



Spindle Lock



Variable Speed



Brake

Cordless

Chargers/
Batteries

Drilling

Demolition

Fastening

Grinding

Polishing &
Sanding

Sawing

Cutting

Planing &
Routing

Miscellaneous

Pneumatic

CORDLESS CAULKING GUN

Cordless

Chargers/
Batteries

Drilling

Demolition

Fastening

Grinding

Polishing &
Sanding

Sawing

Cutting

Planing &
Routing

Miscellaneous

Pneumatic

AC 18DA Cordless Caulking Gun

Li-ion



Anti-Drip Mechanism

The auto reverse feature prevents unwanted dripping of material when the trigger is released.

Built-in LED Light

Illuminates the work space when used in darker areas.

Runtime per Charge* (Using BSL36A18 battery)

Silicone Sealant φ5mm Nozzle	Urethane Sealant φ10mm Nozzle	Acrylic Adhesive φ8mm Nozzle
Up to 165 Cartridges	Up to 180 Cartridges	Up to 165 Cartridges

Features

- 3,000N of dispensing force for high viscosity adhesives and sealants.
- Variable speed trigger and speed dial control allow for easy speed adjustment.
- Can be placed upside down with the cartridge inserted when not in use.
- Anti-drip mechanism prevents unwanted dripping of material when the trigger is released.
- LED light.

Specifications		
Voltage	18V	
Dispensing Speed	0 - 14mm/s	
Maximum Dispensing Force	3,000N	
Stroke	300ml Holder	216mm
	400ml Holder	
	600ml Holder	340mm
	800ml Holder (for APAC)	
Dimensions (L x W x H)	482 x 82 x 280mm	
Weight	3.4kg (with BSL36B18 Battery* and 600ml Holder)	
Standard Accessories	Battery (BSL1820M), Charger (UC18YSL3), 300ml and 400/600ml Holder Set, Protective Glasses, Hook, Battery Cover	

*Standard accessories may vary by country or area



600ml holder in use

MRP: ₹ 49,223/-



RH 18DA
Cordless Caulking Gun



Features

- 3,000N of dispensing force for high viscosity adhesives and sealants.
- Variable speed trigger and speed dial control allow for easy speed adjustment.
- Can be placed upside down with the cartridge inserted when not in use.
- Anti-drip mechanism prevents unwanted dripping of material when the trigger is released.
- LED light.

Specifications	
Voltage	18V
Temperature	I 30 - 400°C
	II 30 - 550°C
Air Volume	I 200L/min
	II 300L/min
Overall Length	217mm (without Battery)
Weight	1.6kg (with BSL36A18)
Standard Accessories	1 Battery BSL36A18 or BSL1850MA, Charger (UC18YSL3), Nozzle (Plane), Nozzle (Curved Surface), Nozzle (Round)



Three Nozzle Attachments (Included as standard)



MRP: ₹ 32,958/-

*Standard accessories may vary by country or area



P 18DSL
Cordless Planer



Features

- Rabbeting depth: 9mm
- Built-in stand to prevent the blade damaging workpieces.
- Remaining battery indicator lamp
- Optional adaptor to connect an optional dust bag or elbow

Specifications	
Cutting width	82mm
Dimensions	Length 332mm
	Width 166mm
	Height 160mm
Max. cutting depth	82mm
Max. rebating depth	9.0mm
No load speed	16,000 (min-1)
Weight	3.3kg (with BSL36A18 battery)
Standard accessories*	2 Batteries BSL36A18 or BSL1850MA, Charger (UC18YSL3), 4 x 82mm reversible TCT blades.

*Standard accessories may vary by country or area

MRP: ₹ 48,126/-



Equipped with brake

When the switch trigger is released, the brake stops the blade rotation automatically.

Soft grip handle easy to hold

Comfortable operation thanks to anti-slipping, soft grip handle easy to hold.

Remaining battery indicator

Built-in stand to prevent contact between blade and material

When the planer is lifted, the stand is extended from the rear base to prevent the material being damaged by unexpected contact with the blade.

Attachable guide (included)

Using a guide assembly (included) enables easy rabbeting (shiplap-forming) and fine finish.



2-speed Gear

- Cordless
- Chargers/Batteries
- Drilling
- Demolition
- Fastening
- Grinding
- Polishing & Sanding
- Sawing
- Cutting
- Planing & Routing
- Miscellaneous
- Pneumatic

CORDLESS BLOWER

Cordless

RB 18DC Cordless Blower

Li-ion

Chargers/
Batteries

Drilling

Demolition

Fastening

Grinding

Polishing &
Sanding

Sawing

Cutting

Planing &
Routing

Miscellaneous

Pneumatic



Features

- 3 air volume settings allow the user to control the volume with ease to suit the application
- Lock-on button for continuous use
- Low vibration ensures less fatigue and comfort for the user
- Can be used as a vacuum with an optional dust bag
- Compatible with 14.4 Lithium-ion Batteries

	Specifications
Voltage	18V
Air Volume Flow (without Nozzle)	0 - 3.5m ³ /min
Maximum Air Velocity (with Nozzle)	95m/s
Average Air Velocity (with Nozzle)	78m/s
Overall Length	490mm (with BSL36A18)
Weight	1.8kg (with BSL36A18)
Standard accessories*	1 Battery BSL36A18 or BSL1850MA, Charger (UC18YSL3), Nozzle

*Standard accessories may vary by country or area



MRP: ₹ 23,818/-

Easy Air Volume Control

The variable speed trigger and three air volume settings allow the user to control the volume with ease to suit the application.



Variable Speed Trigger

Air Volume Changing Lever
3: High
2: Medium
1: Low

Lock-on Button for Continuous Use



HIKOKI




CORDLESS IMPACT WRENCH

CORDLESS IMPACT WRENCH

Li-ion

WR 18DF

18V Cordless Impact Wrench



Features

- Powerful with a max torque of 220Nm
- High capacity battery with battery level indicator
- LED light



Specifications		
Capacity	Bolt	M10-M16
	High Tension Bolt	M8-M14
Square Drive	12.7mm	
Tightening Torque	220Nm	
Battery Voltage	18V	
No Load Speed	0-2,400/min	
Impact Rate	0-3,200/min	
Overall Length	177mm	
Weight	1.4kg	
Standard Accessories*	2 Batteries (BSL1820M), Charger (UC18YSL3), Battery Cover, Carrying Case	

*Standard accessories may vary by country or area

MRP: ₹ 13,000

WR 18DH

18V Cordless Impact Wrench

999054

Li-ion IP56 BRUSHLESS



Features

- 345Nm Tightening Torque
- 600Nm Nut Busting Torque
- Variable Speed Control
- 4-Stage Tightening Mode Selector
- IP56 Dust & Water Resistant
- Bright LED Light
- Compact, Light weight & Well balanced



Specifications		
Capacity	Ordinary Bolt	M10-M20
	High Tension Bolt	M10-M16
Square Drive	12.7mm	
Tightening Torque	345Nm	
Battery Voltage	18V	
No-load rotation speed	Mode 4	0 - 2,800 / min
	Mode 3	0 - 2,400 / min
	Mode 2	0 - 1,800 / min
	Mode 1	0 - 1,200 / min
Full Load Impact Rate	0-3,200/min	
Overall Length	144mm	
Weight	1.3kg (Without battery)	
	2.3kg (BSL36B18X)	
Standard Accessories*	2 Batteries (BSL1850MA), Charger(UC18YFSL), Battery Cover, Carrying case	

*Standard accessories may vary by country or area

MRP: ₹ 43,365/-

WR 18DSDL

18V Cordless Impact Wrench

999054

Li-ion



Features

- Save mode or Power mode for better control based on the application
- 12.7mm (1/2") Square bit shank
- Tightening torque 255Nm



Specifications		
Capacity	Bolt	M10-M18
	High Tension Bolt	M8-M14
Square Drive	12.7mm	
Tightening Torque	Power Mode	255Nm
	Save Mode	140Nm
Battery Voltage	18V	
No Load Speed	Power Mode	0-2,600/min
	Save Mode	0-2,000/min
Full Load Impact Rate	0-3,200/min	
Overall Length	173mm	
Weight	1.5kg (with BSL1830C)- 2.1kg (with BSL1850)	
Standard Accessories*	2 Batteries (BSL1830 or BSL1850), Charger (UC18YFSL / UC18YSL3 / UC18YRSL), Carrying Case	

*Standard accessories may vary by country or area

MRP: ₹ 34,000/-

Cordless

Chargers/
Batteries

Drilling

Demolition

Fastening

Grinding

Polishing &
Sanding

Sawing

Cutting

Planing &
Routing

Miscellaneous

Pneumatic



CR 18DBL
Cordless
Reciprocating Saw

Li-ion
BRUSHLESS
LVH
LOW VIBRATION HANDLE

Features

- Brushless motor control allows max speed (SPM) adjustment With auto mode, electricity consumption and noise can be suppressed by lowering the number of maximum strokes during no-load motor operation
- Tool-less blade change
- Tool-less shoe adjustment
- Easy to grip and handle
- Large pivoting hook conveniently allows for hanging the tool on a ϕ 48mm pipe



Specifications		
Battery Voltage	18V	
Capacity	Mild Steel Pipe	130mm
	PVC Pipe	130mm
	Wood	120mm
	Mild Steel Plate	19mm
No Load Speed	0 - 2,500/min	
Length of Stroke	32mm	
Overall Length	435mm	
Weight	3.4kg*	
Standard Accessories*	2 Batteries BSL36A18 or BSL1850MA, Charger (UC18YSL3), Blade for Wood, Hex. Bar Wrench, Battery Cover, Carrying Case	



MRP: ₹ 52,581/-

*Standard accessories may vary by country or area

CB 18DBL
Cordless Band Saw

Li-ion
BRUSHLESS

Features

- Auto Mode function
- Soft start function
- High speed cutting with a cleaner finish



Specifications		
Battery Voltage	18V	
Capacity	Round pipe (external diameter)	83mm
	Square pipe (WxH)	80x80mm
Cutting Speed	Standard mode	80 - 195 (m/min)
	Auto mode (without load)	120 - 195 (m/min)
Dimensions	Length	413mm
	Width	173mm
	Height	266mm
Blade size	900 x 12.5 x 0.5mm	
Length of Stroke	32mm	
Overall Length	435mm	
Weight	3.6kg (with BSL36A18 battery)	
Standard accessories*	2 Batteries BSL36A18 or BSL1850MA, Charger (UC18YSL3), 1 x 18TPI bi-metal blade, side handle and wrench. 3.6kg (with BSL36A18 battery)	

MRP: ₹ 52,734/-

*Standard accessories may vary by country or area



Brake



Variable Speed



Electronic Constant Speed Control

Cordless

Chargers/
Batteries

Drilling

Demolition

Fastening

Grinding

Polishing &
Sanding

Sawing

Cutting

Planing &
Routing

Miscellaneous

Pneumatic

Cordless

UB 18DC Cordless Work Light



Features

- Brightness adjustable from 700lm to 4,000lm
- IP65 dust and water resistant
- Angle adjustable
- Hanging hook



Specifications

Battery Voltage	18V
LED (White)	60pcs
USB Port	5V, 1A
Brightness Adjustment Range	700 - 4,000lm
Weight	1.9kg (Without Battery)
Dimensions (L x W x H)	186 x 155 x 276mm
Standard Accessories*	1 Battery BSL36A18 or BSL1850MA, Charger (UC18YSL3),

*Standard accessories may vary by country or area

MRP: ₹ 38,517/-

Chargers/
Batteries

Drilling

Demolition

Fastening

Grinding

M 18DYA Cordless Cut-Out Tool



Features

- Lightweight and ergonomic design with a small gripSoft start function circumference at 169mm
- LED light turns on when the tool is activated



Most Compact and Lightest in its Class

Featuring a lightweight and ergonomic design with a small grip circumference at 169mm, the M18DYA is nimble and easy to maneuver.



Specifications	
Collet Chuck Capacity	3.18mm (1/8") or 6.35mm (1/4")
Battery Voltage	18V
No Load Speed	28,000/min
Dimensions (L x W x H)	259x118x82mm (with BSL1820M)
Weight	1.7kg (with BSL36A18)*
Standard Accessories*	2 Batteries BSL36A18 or BSL1850MA, Charger (UC18YSL3), 2 Collet Chucks, 2 Bits, Wrench, Hook, Battery Cover, Carrying Case

*Standard accessories may vary by country or area

MRP: ₹ 45,897/-



Polishing &
Sanding

Sawing

Cutting

Planing &
Routing

Miscellaneous

Pneumatic

R 18DSL
Cordless Cleaner

Li-ion

Features

- Capable of approx. 29 minutes of continuous use by an optional 3.0Ah-capacity battery
- Powerful dust collection
- High capacity translucent dust case
- Includes crevice nozzle, brush nozzle and squeegee nozzle



Specifications	
Battery Voltage	18V
Dustcase Capacity	670mL
Overall Length	430mm
Weight	1.5kg
Standard Accessories*	2 Battery BSL36A18 or BSL1850MA, Charger (UC18YSL3), Brush Nozzle, Crevice Nozzle, Squeegee Nozzle

*Standard accessories may vary by country or area

MRP: ₹ 23,635/-

- Cordless
- Chargers/ Batteries
- Drilling
- Demolition
- Fastening
- Grinding
- Polishing & Sanding
- Sawing
- Cutting
- Planing & Routing
- Miscellaneous
- Pneumatic

CORDLESS COOLER & WARMER BOX

Cordless

Chargers/
Batteries

Drilling

Demolition

Fastening

Grinding

Polishing &
Sanding

Sawing

Cutting

Planing &
Routing

Miscellaneous

Pneumatic

UL 18DA Cordless Cooler & Warmer Box

Li-ion



Features

- 3 stage temperature settings
- Power source options: battery, AC power, or automotive power supplies
- Battery charging function
- Shoulder belt and casters for easy mobility

Specifications

Power Supply	Slide battery (14.4V, 18V, MULTI VOLT), Household power supply, 12VDC	
Performance	Cold (Min. 5)	High: Ambient -25, Mid: Ambient -20, Low: Ambient -10
	Hot (Max. 55)	High: Ambient +45, Mid: Ambient +40, Low: Ambient +25
Continuous Operating Time (with one BSL36A18 battery)	High	Approx. 2h 30min
	Mid	Approx. 3h 10min
	Low	Approx. 5h
Capacity	25L	
Cooling System	Electronic cooling system	
Number of Batteries that Can Be Installed	2	
Charging Time (at 20, with one BSL36A18 battery)	3h 20min	
Operating Temperature Range	0-40	
External Dimensions (L x W x H)	340 x 560 x 445 mm (13-13/32" x 22-1/16" x 17-17/32")	
Weight	8.0 kg (17.6lbs.) without battery	
Standard Accessories	AC Adapter, DC Cord, Shoulder Belt, Handle	

*Standard accessories may vary by country or area

MRP: ₹ 35,400/-



MULTI VOLT battery system

AC POWER.

DC FREEDOM.

A new generation battery system (BSL36A18), with almost the same size and weight as our 18V 5.0Ah/6.0Ah battery, but it's the technology inside that provides you with the great improvements you need. Doubling voltage provides the optimal power for the MULTI VOLT 36V tools, without the hassle of cords. The MULTI VOLT batteries are compatible with a wide range of 18V cordless tools, which means you can easily switch from one power tool to another. So you're just a simple click away from maximum performance.

Cordless

Chargers/
Batteries

Drilling

Demolition

Fastening

Grinding

Polishing &
Sanding

Sawing

Cutting

Planing &
Routing

Miscellaneous

Pneumatic

Cordless

Chargers/
Batteries

Drilling

Demolition

Fastening

Grinding

Polishing &
Sanding

Sawing

Cutting

Planing &
Routing

Miscellaneous

Pneumatic




MULTI VOLT

GREAT FEATURES

COMPATIBILITY

- One Battery Two Voltages (36V / 18V)
- Backward Compatible with HiKOKI 18V tools

The MV battery platform is compatible with both 36V and 18V tools, and it automatically changes between the two voltages according to the tool used. Having to use different batteries and changes for different tools can be very cumbersome and inconvenient. MV users need only one battery to use both 18V and 36V tools, which saves all the hassle.

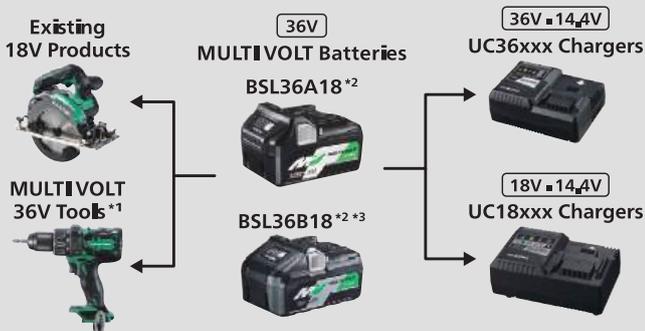

BSL36A18 / BSL36B18 MULTI VOLT Battery

OUTSTANDING POWER

- 36V Nominal Voltage. Up to 41V after Charging.

The MULTI VOLT 36V battery platform boasts a high power output, with the maximum voltage reaching as high as 41V right after charging. The MULTI VOLT batteries deliver the power to increase productivity and efficiency.

ALL DAY RUNTIME

MULTI VOLT gives you the choice to operate MULTI VOLT tools either cordless with a MULTI VOLT 36V battery or corded with the MULTIVOLT AC Adapter. When a power outlet is available, you can choose to use the AC adapter for unlimited runtime.



Model	BSL36A18	BSL36B18
Voltage & Capacity	36V - 2.5Ah / 18V - 5.0Ah (dual voltage)	36V - 4.0Ah / 18V - 8.0Ah (dual voltage)
Cooling System	Yes	
Dimensions (L x H x W)	116 x 69 x 76mm	134 x 75 x 83mm
Charging Time	Approx. 32min. (When using the UC18YSL3 charger)	Approx. 52min. (When using the UC18YSL3 charger)
Compatible Products	18V	Existing 18V slide-type tools
	36V	MULTI VOLT 36V tools
Compatible Charger	All chargers compatible with 14.4-36V slide-type Lithium-ion batteries	

GREAT PERFORMANCE IN COLD WEATHER

The MULTI VOLT batteries are guaranteed to work at a temperature as low as -10°C, providing you with peace of mind when you work in cold weather.

CORDLESS DRIVER DRILLS

DS 36DA
MULTI VOLT 36V
Cordless Driver Drill



Higher Drilling Capacity and Greater Versatility with MULTI VOLT Battery



Li-ion
BRUSHLESS
RFC
REACTIVE FORCE CONTROL

Features

- Feedback speed control for more stable handling
- Robust aluminium gear case
- 22-stage adjustable clutch
- Large double - molded clutch dial is easy to grip and read
- IP56 dust & water resistance

Specifications		
Drill Chuck	1.5-13mm Keyless	
Capacity	Mild Steel	16mm
	Soft Wood	102mm
	Wood Screw	12x100mm
	Machine Screw	6mm
Battery Voltage	36V	
No Load Speed	High	0-2,100/min
	Low	0-500/min
Max Torque Hard	138Nm	
Max Torque Soft	64Nm	
Torque Setting	2-8Nm	
Overall Length	204mm	
Weight	2.7kg - 3.0kg	
Standard Accessories*	2 Batteries (BSL36A18), Charger (UC18YSL3), Side Handle, Driver Bit, Battery Cover, Carrying Case	



*Standard accessories may vary by country or area

MRP: ₹ 55,500/-



Brake



Variable Speed



Reversible



2-speed Gear

- Cordless
- Chargers/Batteries
- Drilling
- Demolition
- Fastening
- Grinding
- Polishing & Sanding
- Sawing
- Cutting
- Planing & Routing
- Miscellaneous
- Pneumatic

CORDLESS DRIVER DRILLS

DS 36DC
MULTI VOLT 36V
Cordless Driver Drill

Li-ion
BRUSHLESS
RFC
REACTIVE FORCE CONTROL

Features

- Powerful enough to drill 36mm holes easily
- Continuously drives thick and long screws fast
- 190mm compact head
- Side handle is easy to use and easily adjustable at 11 different positions

Specifications		
Drill Chuck	1.5-13mm Keyless	
Capacity	Mild Steel	20mm
	Soft Wood	118mm
	Wood Screw	16x100mm
	Machine Screw	6mm
Battery Voltage	36V	
No Load Speed	High	0-2,200/min
	Low	0-550/min
Max Torque Hard	155Nm	
Max Torque Soft	100Nm	
Overall Length	190mm	
Weight	2.8kg (with BSL36A18)	
	3.1kg (with BSL36B18)	
Standard Accessories*	2 Batteries (BSL36A18), Charger (UC18YSL3), Side Handle, Hook, Driver Bit, Battery Cover, Carrying Case	

*Standard accessories may vary by country or area

MRP: ₹ 48,000/-



Higher Drilling Capacity
and Greater Versatility with
MULTI VOLT Battery



CORDLESS IMPACT DRIVER DRILLS

DV 36DA
MULTI VOLT 36V Cordless Impact Driver Drill

Li-ion
BRUSHLESS
RFC
REACTIVE FORCE CONTROL



Higher Drilling Capacity and Greater Versatility with MULTI VOLT Battery



Features

- Feedback speed control for more stable handling
- Robust aluminium gear case
- 22-stage adjustable clutch
- Large double-molded clutch dial is easy to grip and read

Specifications

Drill Chuck	1.5–13mm Keyless	
Capacity	Brick	20mm
	Mild Steel	16mm
	Soft Wood	102mm
	Wood Screw	12x100mm
	Machine Screw	6mm
Battery Voltage	36V	
No Load Speed	High	0–2,100/min
	Low	0–500/min
Impact Rate	High	0–31,500/min
	Low	0–7,500/min
Max Torque Hard	138Nm	
Max Torque Soft	64Nm	
Torque Setting	2–8Nm	
Overall Length	204mm	
Weight	2.7kg-3.0kg	
Standard Accessories*	2 Batteries (BSL36A18), Charger (UC18YSL3), Side Handle, Driver Bit, Battery Cover, Carrying Case	

*Standard accessories may vary by country or area

MRP: ₹ 60,000/-



Brake



Variable Speed



Reversible



2-speed Gear

- Cordless
- Chargers/Batteries
- Drilling
- Demolition
- Fastening
- Grinding
- Polishing & Sanding
- Sawing
- Cutting
- Planing & Routing
- Miscellaneous
- Pneumatic

CORDLESS IMPACT DRIVER



MULTI VOLT
High-Speed Fastening
throughout the Battery
Charge

WH 36DB
MULTI VOLT 36V
Cordless Impact Driver

IP56

**TRIPLE
HAMMER**

Li-ion BRUSHLESS

Features

- Triple Hammer mechanism has three strikers making three impacts per rotation instead of the usual two, reducing vibration and vastly improving user comfort
- 4-step tightening mode selector for a variety of jobs from delicate to heavy duty work
- Newly designed airflow system for optimal cooling efficiency
- Well-balanced weight distribution for better work efficiency
- IP56 dust & water resistance



Specifications

Capacity	Bolt	5-18mm
	High Tension Bolt	5-14mm
	Machine Screw	4-10mm
	Self Drilling Screw	3.5-6mm
Drive	6.35mm Hex Bit Shank	
Tightening Torque	210Nm	
Battery Voltage	36V	
No Load Speed	Power Mode	0-2,900/min
	Normal Mode	0-2,900/min
	Soft Mode	0-900/min
	Self Drilling Screw Mode	0-2,900/min
Impact Rate	Power Mode	0-4,100/min
	Normal Mode	0-4,100/min
	Soft Mode	0-2,000/min
	Self Drilling Screw Mode	0-2,200/min
Overall Length	127mm	
Weight	1.6kg-1.9kg	
Standard Accessories*	2Batteries (BSL36A18), Charger (UC18YSL3), Battery Cover, Carrying Case	



*Standard accessories may vary by country or area

MRP: ₹ 52,500/-



CORDLESS IMPACT DRIVER



WH 36DC
MULTI VOLT 36V
Cordless Impact Driver

IP56
TRIPLE HAMMER

Li-ion BRUSHLESS

Features

- Compact head and lightweight design
- 5 tightening modes for various applications
- Triple LED lights for superior visibility
- IP56 dust & water resistance

Specifications		
Capacity	Small Screw	4 - 10mm
	Ordinary Bolt	5-18mm
	High Tension Bolt	5-14mm
	Self Drilling Screw	ø3.5-ø6mm
Drive	6.35mm Hex Bit Shank	
Max. Tightening Torque	215Nm	
Battery Voltage	36V	
No Load Speed	Soft Mode	0-900/min
	Power Mode	0-3,400/min
	Bolt Mode	0-2,900/min
	Bolt Single Mode	0-2,900/min
	Self Drilling Screw Mode	0-3,700/min
Impact Rate	Soft Mode	0-2,000/min
	Power Mode	0-4,100/min
	Bolt Mode	0-4,100/min
	Bolt Single Mode	0-4,100/min
	Self Drilling Screw Mode	0-2,200/min
Overall Length	114mm	
Weight	1.6kg	
Standard Accessories*	2 Batteries (BSL36A18), Charger (UC18YSL3), Battery Cover, Carrying Case	

*Standard accessories may vary by country or area



MRP: ₹ 17,340/-
(Bare Tool)

- Cordless
- Chargers/ Batteries
- Drilling
- Demolition
- Fastening
- Grinding
- Polishing & Sanding
- Sawing
- Cutting
- Planing & Routing
- Miscellaneous
- Pneumatic

CORDLESS IMPACT WRENCH



IP56

WR 36DF
MULTI VOLT 36V
Cordless Impact Wrench



Li-ion
BRUSHLESS



Features

- 1,900Nm Tightening Torque
- 2,400Nm Nut Busting Torque
- Variable Speed Control
- 4-Stage Tightening mode selector
- IP56 Dust and Water Resistant*
- Powered by 36V High Performance brushless motor
- Bright LED light

Specifications

Capacity	Bolt	M12-M36
	High Tension Bolt	M10-M27
Square Drive	19mm	
Tightening Torque	1,900Nm	
Nut Busting Torque	2,400Nm	
Battery Voltage	36V	
No Load Speed	Mode 4	0-1,500/min
	Mode 3	0-1,200/min
	Mode 2	0-900/min
	Mode 1	0-600/min
Full Impact Rate	Mode 4	0-2,600/min
	Mode 3	0-2,200/min
	Mode 2	0-1,900/min
	Mode 1	0-1,600/min
Overall Length	221mm	
Weight	3.9kg (BSL36A18)	
Standard Accessories*	Charger (UC 18YSL3), Battery (BSL36A18) - 2 Nos, stackable case, battery cover.	



*Standard accessories may vary by country or area
* Above image is for illustration purpose only.

MRP: ₹ 52,000/-



CORDLESS IMPACT WRENCH



WR 36DG
MULTI VOLT 36V
Cordless Impact Wrench



Li-ion
BRUSHLESS



Features

- 1,400Nm Tightening Torque
- 2,000Nm Nut Busting Torque
- Variable Speed Control
- 4-Stage Tightening mode selector
- IP56 Dust and Water Resistant*
- Powered by 36V High Performance brushless motor
- Bright LED light

Specifications		
Capacity	Bolt	M12–M33
	High Tension Bolt	M10–M24
Square Drive	12.7mm	
Tightening Torque	1,400Nm	
Nut Busting Torque	2,000Nm	
Battery Voltage	36V	
No Load Speed	Mode 4	0–1,500/min
	Mode 3	0–1,200/min
	Mode 2	0-900/min
	Mode 1	0–600/min
Full Impact Rate	Mode 4	0–2,500/min
	Mode 3	0–2,200/min
	Mode 2	0–1,900/min
	Mode 1	0–1,600/min
Overall Length	221mm	
Weight	3.9kg (BSL36A18)	
Standard Accessories*	Charger (UC 18YSL3), Battery (BSL36A18) - 2 Nos, stackable case, battery cover.	



*Standard accessories may vary by country or area
* Above image is for illustration purpose only.

MRP: ₹ 53,000/-

- Cordless
- Chargers/ Batteries
- Drilling
- Demolition
- Fastening
- Grinding
- Polishing & Sanding
- Sawing
- Cutting
- Planing & Routing
- Miscellaneous
- Pneumatic

CORDLESS DISC GRINDER



G 3610DA
 MULTI VOLT 36V
 Cordless Disc Grinder
 with Slide Switch



Li-ion
BRUSHLESS

Features

- Faster grinding & cutting speed
- 146mm grip circumference
- Auto Mode adjusts the speed automatically between high and low speeds depending on the load
- Electronic brake stops the wheel in less than 2 seconds
- Kickback protection system
- Anti-restart protection
- Variable speed control

Specifications

Capacity	Wheel Dia.	100mm
	Hole Dia.	16mm
Spindle Thread	M10x1.5	
Voltage	36V	
No Load Speed	Transmission Mode	3,000-9,500/min
	Auto Mode	5,500/min
Overall Length	358mm	
Weight	2.6kg	
Standard Accessories*	2 Batteries (BSL36A18), Charger (UC18YSL3), Depressed Center Wheel (100mm dia.), Side Handle, Wrench, 2 Battery Covers, Carrying Case	

*Standard accessories may vary by country or area

MRP: ₹ 48,000/-



CORDLESS DISC GRINDER

G 3610DVE
MULTI VOLT 36V
Cordless Disc Grinder

**Li-ion
BRUSHLESS**



Higher Drilling Capacity
and Greater Versatility with
MULTI VOLT Battery

Features

- 1,500W max output
- Highly durable ball bearings
- Dust and water resistant switch
- After the motor has stopped due to overloading, it continues to run if the load decreases within 1.5 seconds
- Small grip circumference
- Variable speed control with auto mode
- Dual LEDs illuminate both sides of the wheel
- 3 position side handle
- Easy to maintain mesh dust filter
- Kickback protection
- Drop shut-off function
- Restart protection



Specifications

Battery Voltage	36V	
Capacity	Wheel Dia.	100mm
	Hole Dia.	16mm
	Thickness.	6mm
No Load Speed	AUTO Mode	5,500/min
	Transmission Mode	3,200 - 10,000/min
Spindle Thread	M10 x 1.5	
Overall Length	375mm*	
Weight	2.8kg (with BSL36A18)	
	3.0kg (with BSL36B18)	
Standard accessories*	2 Batteries (BSL36A18), Charger (UC18YSL3), Side Handle, Wheel Guard, Depressed Center Wheel, Wrench, 2 Battery Covers, Carrying Case	

*Standard accessories may vary by country or area



MRP: ₹ 48,000/-



Electronic Soft Start Control



Variable Speed



Spindle Lock



Brake

- Cordless
- Chargers/Batteries
- Drilling
- Demolition
- Fastening
- Grinding
- Polishing & Sanding
- Sawing
- Cutting
- Planing & Routing
- Miscellaneous
- Pneumatic

CORDLESS DISC GRINDER



G 3618DA
 MULTI VOLT 36V
 Cordless Disc Grinder
 with Slide Switch

Li-ion
BRUSHLESS



Features

- High performance with brushless motor
- Trigger switch with ON/OFF lock
- Brake, kickback, anti-restart & soft start function
- Soft grip & anti-vibration side handle
- Tool-less wheel guard

Specifications

Capacity	Wheel Dia.	180mm
	Hole Dia.	22.23mm
Spindle Thread	M14x2	
Voltage	36V	
No Load Speed	Normal Mode	5,300/min
	Auto Mode	3,200/min
Overall Length	531mm	
Weight	4.7kg (Without Battery)	
Accessories	2 Batteries (BSL36A18), Charger (UC18YSL3), Depressed Center Wheel (180mm dia.), Side Handle, Wrench, 2 Battery Covers, Carrying Case	

*Standard accessories may vary by country or area



MRP: ₹ 35,600/-
(Bare Tool)



CORDLESS RECIPROCATING SAW

CR 36DA
MULTI VOLT 36V
Reciprocating Saw

**Li-ion
BRUSHLESS**

UVP
US-VIBRATION PROTECTION



Features

- Orbital Mode for maximum wood cutting approx. 194% faster cutting speed
- HiKOKI Twin-counterweight System for significant vibration reduction
- Four-mode speed control for a variety of applications
- Tool-less blade change
- Tool-less shoe adjustment
- Durable cylindrical housing
- Large pivoting hook

Specifications		
Battery Voltage	36V	
Capacity	Mild Steel Pipe	130mm
	Vinyl Chloride Pipe.	130mm
	Wood	300mm
	Mild Steel Plate	19mm
No Load Speed	0 - 3,000/min	
Length of Stroke	32mm	
Overall Length	457mm	
Weight	4.5kg with BSL36A18 battery	
Standard accessories*	2 Batteries BSL36A18, Charger (UC18YSL3), Blade, Battery Cover, Carrying Case	

*Standard accessories may vary by country or area

MRP: ₹ 72,017/-



Brake



Variable Speed



2-speed Gear



Orbital Cutting Action

- Cordless
- Chargers/Batteries
- Drilling
- Demolition
- Fastening
- Grinding
- Polishing & Sanding
- Sawing
- Cutting
- Planing & Routing
- Miscellaneous
- Pneumatic

CORDLESS BRUSHLESS CHAIN SAW

CS 3635DB
MULTI VOLT 36V
Cordless Chain Saw

Li-ion
BRUSHLESS

Features

- Powerful cutting performance
- Highly durable and low vibration thanks to the brushless motor with a direct drive system
- Toolless chain change and adjustment



Specifications	
Battery Voltage	36V
Guide Bar Length	350mm
Chain Speed	14.9m/s
Type of Guide Bar	Sprocket Nose
Chain Pitch	9.5mm
Chain Gauge	1.1mm
Overall Length	760mm
Oil Tank Capacity	100mL
Vibration Total Values (triax vector sum)*	Vibration Emission Value ah -2.4 m/s ² Uncertainty K - 1.5m/s ²
Weight* (with Battery, Saw Chain, Guide Bar)	4.6kg (with BSL36A18)
Standard Accessories*	2 Batteries (BSL36A18), Charger (UC18YSL3), Side Handle, Wheel Guard, Depressed Center Wheel, Wrench, 2 Battery Covers, Carrying Case



*Standard accessories may vary by country or area

MRP: ₹ 48,000/-

MV
MULTI VOLT
Higher Drilling Capacity
and Greater Versatility with
MULTI VOLT Battery



CORDLESS HEDGE TRIMMER

CH 3656DA
MULTI VOLT 36V

Cordless Hedge Trimmer

Li-ion

Features

- Approx. 62.5 min* runtime per charge with MULTI VOLT battery
- Triple-edged and double-sided blade cuts well
- Four speed settings
- Ergonomic shaped sub handle and soft-grip main handle for comfortable hedge cutting in any working position
- Durable aluminum bottom cover
- With a handle shape with good operability that allows you to easily select your working posture, It is ideal for cutting the top and sides of hedges. In addition, we adopted a soft grip that is easy to hold and hard to slip.



Specifications

Battery Voltage	36V	
Blade	Length.	620mm
	Effective.	560mm
Blade Pitch	35mm	
Overall Length	1,088mm	
Weight	4.1kg (with BSL36A18)	
Standard accessories*	2 Batteries (BSL36A18), Charger (UC18YSL3), Blade Case, Battery Cover	

*Standard accessories may vary by country or area

MRP: ₹ 51,520/-



Higher Drilling Capacity and Greater Versatility with MULTI VOLT Battery

- Cordless
- Chargers/ Batteries
- Drilling
- Demolition
- Fastening
- Grinding
- Polishing & Sanding
- Sawing
- Cutting
- Planing & Routing
- Miscellaneous
- Pneumatic



2-speed Gear

CORDLESS GRASS TRIMMER

CG 36DB MULTI VOLT 36V

Cordless Grass Trimmer

Li-ion

Features

- Well balanced and easy to operate
- Lightweight design
- 3 stage speed control



MULTI VOLT
Higher Drilling Capacity
and Greater Versatility with
MULTI VOLT Battery

Specifications

Battery Voltage	36V	
No Load Speed	Power	6,500/min
	Nomal.	5,500/min
	Eco	4,000/min
Spindle Thread	310mm	
Overall Length	1,803mm	
Weight	4.5kg (with BSL36A18)	
Standard accessories*	2 Batteries (BSL36A18), Charger (UC18YSL3), Nylon Head, Guard, Hex. Bar Wrench (4mm), Box Wrench (Hex. Socket 17/19) Protective Glasses, Shoulder Belt	



*Standard accessories may vary by country or area

MRP: ₹ 62,515/-



CORDLESS BLOWER

RB 36DA
MULTI VOLT 36V
Cordless Blower

Li-ion
BRUSHLESS



Features

- Approx. 9.5min* runtime per charge (when in mode 4)
- 4-mode power settings plus turbo mode
- High-efficiency and durable brushless motor
- The value is for reference purposes. It may vary according to the operating conditions.
- Lightweight and compact design

Specifications	
Battery Voltage	36V
Air Volume	680m ³ /h (800m ³ /h when in turbo mode)
Air Velocity	45m/s (53m/s when in turbo mode)
Overall Length	940mm
Weight*	3.5kg with BSL36A18
Standard accessories*	2 Batteries (BSL36A18), Charger (UC18YSL3), Nozzle, Battery Cover

*Standard accessories may vary by country or area

MRP: ₹ 62,515/-



- Cordless
- Chargers/ Batteries
- Drilling
- Demolition
- Fastening
- Grinding
- Polishing & Sanding
- Sawing
- Cutting
- Planing & Routing
- Miscellaneous
- Pneumatic

CORDLESS CHARGER

Cordless

UC 3SFL 3.6V Charger

Chargers/
Batteries

Features

- Large charge indicator lamp



Specifications		
Charging Voltage	3.6V	
Battery	Type	Cassette
	Assortment	Lithium-ion
Fan cooling	No	

Drilling

Demolition

UC 7SL 7.2V Charger

Fastening

Li-ion

Features

- Large charge indicator lamp with 4 color LED status lights
- Battery capacity lamp (4 stages)
- Low-temperature charge (-10° C and above)



Specifications		
Charging Voltage	7.2V	
Battery	Type	Cassette
	Assortment	Lithium-ion
Fan cooling	No	

Grinding

Polishing &
Sanding

UC 10SL2 10.8V Charger

Sawing

Li-ion

Features

- For BCL1015 / BCL1015S / BCL1030C / BCL1030 / BCL1030M Lithium-ion batteries



Specifications		
Charging Voltage	10.8V	
Battery	Type	Cassette
	Assortment	Lithium-ion
Fan cooling	No	

Cutting

Planing &
Routing

UC 12SL 10.8 - 12V Peak Charger

Miscellaneous

Li-ion

Features

- Compatible with engine generators
- Low-temperature charge (From -10°C)



Specifications		
Charging Voltage	10.8 - 12V Peak	
Battery	Type	Slide
	Assortment	Lithium-ion
Fan cooling	Yes	

Pneumatic

The actual charging time can vary depending on the surrounding temperature & battery condition

UC 18YFSL
14.4V / 18V Charger

Li-ion

Features

- Rapid charging



Specifications		
Charging Voltage	14.4V and 18V	
Battery	Type	Slide
	Assortment	Lithium-ion
Fan cooling	Yes	

UC 18YG
UC 18YGL2
7.2V - 18V Chargers

Li-ion



Specifications		
Charging Voltage	7.2V - 18V	
Battery	Type	Cassette
	Assortment	Lithium-ion
Fan cooling	No	

UC 18YRL
7.2V - 18V Charger

Li-ion

Features

- Rapid charging



Specifications		
Charging Voltage	7.2V - 18V	
Battery	Type	Cassette
	Assortment	Lithium-ion
Fan cooling	Yes	

UC 18YSL3
14.4V / 18V Charger

Li-ion

Features

- Compatible with engine generators
- Low-temperature charge (From -10°C)
- High visibility large charge indicator lamp & full-color LED lights
- USB port (5V, 2A)



Specifications		
Charging Voltage	14.4 and 18V	
Battery	Type	Slide
	Assortment	Lithium-ion
Fan cooling	Yes	

The actual charging time can vary depending on the surrounding temperature & battery condition

Cordless

Chargers/
Batteries

Drilling

Demolition

Fastening

Grinding

Polishing &
Sanding

Sawing

Cutting

Planing &
Routing

Miscellaneous

Pneumatic

CORDLESS BATTERIES

Cordless

Chargers/
Batteries

Drilling

BSL 1850MA 18V Lithium-ion Slide Battery

Li-ion

Features

- Remaining battery indicator
- Compatible with all HiKOKI 18V rapid chargers



Specifications

Voltage & Capacity	18V - 5.0Ah
Cooling System	Yes
Dimensions (L x H x W)	116 x 69 x 76mm
Weight	650g
Compatible Products	All existing 18V slide-type tools
Compatible Chargers	All chargers for 14.4V - 36V Lithium-ion slide batteries

Demolition

BSL 1840M 18V Lithium-ion Slide Battery

Li-ion

Features

- Remaining battery indicator
- Compatible with all HiKOKI 18V rapid chargers



Specifications

Voltage & Capacity	18V - 4.0Ah
Cooling System	Yes
Dimensions (L x H x W)	134 x 83 x 54mm
Weight	600g
Compatible Products	All existing 18V slide-type tools
Compatible Chargers	All chargers for 14.4V - 36V Lithium-ion slide batteries

Fastening

Grinding

BSL 1820M 18V Lithium-ion Slide Battery

Li-ion

Features

- Remaining battery indicator
- Compatible with all HiKOKI 18V rapid chargers



Specifications

Voltage & Capacity	18V - 2.0Ah
Cooling System	Yes
Dimensions (L x H x W)	116 x 76 x 49mm
Weight	380g
Compatible Products	All existing 18V slide-type tools
Compatible Chargers	All chargers for 14.4V - 36V slide-type Lithium-ion batteries

Polishing &
Sanding

Sawing

Cutting

BSL 1240M 10.8 - 12V Peak Lithium-ion Slide Battery

**12V PEAK
Li-ion**



Specifications

Voltage	10.8 - 12V Peak
Capacity	4.0Ah
Dimensions (L x H x W)	91 x 45 x 74mm
Charging Time	Approx. 60 min (when using the UC12SL)
Compatible Products	UC12SL

Planing &
Routing

Miscellaneous

Pneumatic

The actual charging time can vary depending on the surrounding temperature & battery condition

BSL 1220M

10.8 - 12V Peak Lithium-ion Slide Battery



12V PEAK
Li-ion

Specifications	
Voltage	10.8 - 12V Peak
Capacity	2.0Ah
Dimensions (L x H x W)	91 x 45 x 74mm
Charging Time	Approx. 60 min (when using the UC12SL)
Compatible Products	UC12SL

BSL 36A18

36V / 18V MULTI VOLT Lithium-ion Slide Battery



MV
MULTI VOLT
Li-ion

Features

- 1,080W high power output
- Automatic voltage change between 36V 2.5Ah and 18V 5.0Ah depending on the tool's voltage
- Remaining battery indicator
- Full compatibility with the existing 18V slide range and 14.4V-36V slide battery chargers

Specifications	
Voltage & Capacity	36V - 2.5Ah / 18V - 5.0Ah
Cooling System	Yes
Dimensions (L x H x W)	116 x 69 x 76mm
Charging Time	Approx. 32 min (when using the UC18YSL3)
Compatible Products	All existing 18V slide-type tools MULTI VOLT 36V tools
Compatible Chargers	All chargers for 14.4V - 36V slide-type Lithium-ion batteries

Cordless

Chargers/
Batteries

Drilling

Demolition

Fastening

Grinding

Polishing &
Sanding

Sawing

Cutting

Planing &
Routing

Miscellaneous

Pneumatic

The actual charging time can vary depending on the surrounding temperature & battery condition

HIKOKI



DRILLING DRILLS

10 mm TOOL KIT



Specifications		
Drill Chuck	1.5-10mm	
Capacity	Metal	10mm
	Masonry	10mm
	Wood	20mm
Power Input	550W	
No Load Speed	0-3,000/min	
Dimension(L*W*H)	(290x66x100)mm	
Full Load Impact Rate	0-48,000/min	
Package	BMC	
Weight	1.7kg	
28 Pieces Accessories kit		

MRP: ₹ 6,240/-

13 mm TOOL KIT



Specifications		
Drill Chuck	1.5-13mm	
Capacity	Concrete	13mm
	Steel	13mm
	Wood	20mm
Power Input	550W	
No Load Speed	0-2,900/min	
Dimension(L*W*H)	(325x260x790)mm	
Full Load Impact Rate	29,000/min	
Overall Length	270mm	
Package	BMC	
Weight	1.7kg	
28 Pieces Accessories kit		

MRP: ₹ 6,800/-

D 10VSTA
10mm Drill

375702



Features

- Soft grip handle
- Variable & reversible mode

Specifications		
Chuck Capacity	1.5-10mm	
Capacity	Steel	10mm
	Wood	20mm
Power Input	450W	
No Load Speed	0-3,000/min	
Overall Length	245mm	
Weight	1.3kg	
Standard Accessories	Chuck Wrench	

MRP: ₹ 3,060/-

D 13VH
13mm Drill

999041



Features

- Chuck offset 23.5mm
- Aluminium Gear Cover for durability
- Soft grip handle
- Variable speed by trigger and dial

Specifications		
Chuck Capacity	1.5-13mm Keyed / keyless	
Capacity	Steel	13mm
	Wood	40mm
Power Input	690W	
No Load Speed	Hi: 0-3,000/min Lo: 0-1,000/min	
Overall Length	333mm	
Weight	1.9kg	
Standard Accessories	Chuck Wrench, Side Handle, Depth Stopper	

MRP: ₹ 8,840/-



Double Insulation



Variable Speed



Reversible



2-speed Gear

IMPACT DRILLS

Cordless

DV 10VST 10mm Impact Drill

374185 

Features

- Soft grip for easier handling
- Variable speed trigger to suit multiple drilling application
- Forward & reversible for convenience



Specifications		
Drill Chuck	1.5-10mm	
Capacity	Metal	10mm
	Masonry	10mm
	Wood	20mm
Power Input	550W	
No Load Speed	0-3,000/min	
Full Load Impact Rate	0-48,000/min	
Overall Length	290mm	
Weight	1.7kg	
Standard Accessories	Side Handle, Depth Stopper, Accessory Kit	

MRP: ₹ 3,630/-

Chargers/
Batteries

Drilling

Demolition

DV 13VSS 13mm Impact Drill

999041 

Features

- Cylindrical housing for durability
- Offset of chuck: 28mm
- Variable speed by dial & trigger



Specifications		
Drill Chuck	1.5-13mm	
Capacity	Concrete	13mm
	Steel	13mm
	Wood	20mm
Power Input	550W	
No Load Speed	0-2,900/min	
Full Load Impact Rate	29,000/min	
Overall Length	270mm	
Weight	1.4kg	

MRP: ₹ 4,950/-

Fastening

Grinding

Polishing &
Sanding

DV 16V 16mm Impact Drill

999041 

Features

- Cylindrical Housing for durability



Specifications		
Drill Chuck	1.5-13mm	
Capacity	Concrete	16mm
	Steel	13mm
Power Input	590W	
No Load Speed	0-2,900/min	
Full Load Impact Rate	34,500/min	
Overall Length	269mm	
Weight	1.5kg	
Standard Accessories	Side Handle, Depth Gauge, Carrying Case, Chuck Wrench	

MRP: ₹ 7,720/-

Sawing

Cutting

Planing &
Routing

VTP 18 18mm Impact Drill

999041 

Features

- Metal gear housing
- With 2 speed



Specifications		
Voltage	220V	
Drill Chuck	1.5 - 13mm	
Speed change	1	2
No-load speed	1,050/min	1,800/min
Capacity Steel	13mm	8mm
Capacity Concrete	18mm	10mm
Power Input	640W	
Full Load Impact Rate	17,800-28,600/min	
Overall Length	340mm	
Weight	2.3Kg	

MRP: ₹ 8,950/-

Miscellaneous

Pneumatic



HIKOKI



ROTARY HAMMERS

ROTARY HAMMERS

DH 22PBS


22mm Rotary Hammer

374908 



Features

- 2-mode action: Rotation & Hammering mode and Rotation only mode
- SDS Plus shank
- Variable speed trigger
- Drilling / Hammer Drilling



Specifications

Capacity	Concrete	22mm
	Mild Steel	13mm
	Wood	25mm
Power Input	820W	
No load RPM	0-1100/min	
Full Load Impact rate	4400/min	
Overall Length	385mm	
Weight	2.8kg	

MRP: ₹ 14,000/-

DH 24PG2


24mm Rotary Hammer

999041 



Features

- 2-mode action: Rotation and Hammering mode and Rotation only mode
- Compact design
- Labyrinth Ventilation windows



Specifications

Capacity	Concrete	24mm
	Mild Steel	13mm
	Wood	32mm
	Core Bit	50mm
Power Input	730W	
Bit Shank	SDS-plus	
No Load Speed	0-1,050/min	
Full Load Impact rate	0-3,950/min	
Overall Length	349mm	
Weight	2.8kg	
Standard Accessories	Side Handle, Depth Gauge, Carrying Case	

MRP: ₹ 15,450/-

DH 26PB2


26mm Rotary Hammer

999041 



Features

- 2-mode action: Rotation and Hammering mode and Rotation only mode
- Highest drilling speed
- Labyrinth ventilation windows



Specifications

Capacity	Concrete	26mm
	Mild Steel	13mm
	Wood	32mm
	Core Bit	50mm
Power Input	830W	
Bit Shank	SDS-plus	
No Load Speed	0-1,100/min	
Full Load Impact rate	0-4,300/min	
Overall Length	349mm	
Weight	2.8kg	
Standard Accessories	Side Handle, Depth Gauge, Carrying Case	

MRP: ₹ 16,160/-




DH 26PC2
26mm Rotary Hammer



Features

- 3-mode action: Rotation and Hammering mode, Rotation only mode and Hammering mode only.
- Labyrinth ventilation windows
- Compact body



- Double Insulation
- 🌀 Variable Speed
- 👤 Reversible
- fs+ SLOW Slip Clutch
- SDS plus Shank
- 🔧 Rotation only
- 🔨 Rotation & Hammering

Specifications		
Capacity	Concrete	26mm
	Mild Steel	13mm
	Wood	32mm
	Core bit	25-50mm
Power Input	830W	
Bit Shank	SDS-plus	
No-Load Speed	0-1,100min	
Full Load Impact rate	0-4,300min	
Overall Length	349mm	
Weight	2.8kg	
Standard Accessories	Side Handle, Depth Gauge, Carrying Case	


MRP: ₹ 17,950/-

DH 28PB2
28mm Rotary Hammer



Features

- 2-mode action: Rotation and Hammering mode and Rotation only mode.
- Lowest vibration in its class through UVP system using dynamic damper
- Labyrinth ventilation windows
- Large mode change lever



- Double Insulation
- 🌀 Variable Speed
- 👤 Reversible
- fs+ SLOW Slip Clutch
- SDS plus Shank
- 🔧 Rotation only
- 🔨 Rotation & Hammering

Specifications		
Capacity	Concrete	28mm
	Mild Steel	13mm
	Wood	32mm
	Core Bit	50mm
Power Input	850W	
Bit Shank	SDS-plus	
No Load Speed	0-1,100/min	
Full Load Impact rate	0-4,300/min	
Overall Length	360mm	
Weight	3.0kg	
Standard Accessories	Side Handle, Depth Gauge, Carrying Case	

MRP: ₹ 17,280/-

DH 28PC2
28mm Rotary Hammer



Features

- 3-mode action Rotation and Hammering mode, Rotation only mode and Hammering mode only.
- Lowest vibration in its class through UVP system using dynamic damper
- One push bit mounting



- Double Insulation
- 🌀 Variable Speed
- 👤 Reversible
- fs+ SLOW Slip Clutch
- SDS plus Shank
- 🔧 Rotation only
- 🔨 Rotation & Hammering

Specifications		
Capacity	Concrete	28mm
	Mild Steel	13mm
	Wood	32mm
	Core Bit	50mm
Power Input	850W	
Bit Shank	SDS-plus	
No Load Speed	0-1,100/min	
Full Load Impact rate	0-4,300/min	
Overall Length	360mm	
Weight	3.0kg	
Standard Accessories	Side Handle, Depth Gauge, Carrying Case	

MRP: ₹ 20,080/-

ROTARY HAMMERS

Cordless

Chargers/
Batteries

Drilling

Demolition

DH 40MC 40mm Rotary Hammer



999043

Features

- Large change lever
- Multiple bit angle setting.

Specifications		
Capacity	Drill Bit	40mm
	Core Bit	105mm
Power Input	1,100W	
Bit Shank	SDS max	
No Load Speed	620/min	
Full Load Impact rate	2,800/min	
Overall Length	448mm	
Weight	7.1kg	
Standard Accessories	Side Handle, Stopper, Hammer Grease A (30g), Carrying Case	



MRP: ₹ 43,430/-

Fastening

Grinding

Polishing &
Sanding

Sawing

DH 45MA 45mm Rotary Hammer



999044

Features

- Powerful 1,400W motor delivers the power needed for heavy-duty applications
- Large change lever for easy and smooth mode switching
- Easy to hold large trigger switch



Specifications		
Capacity	Drill bit	45mm
	Core bit	125mm
Power Input	1,400W	
Bit Shank	SDS max	
No Load Speed	380/min	
Full Load Impact rate	2,900/min	
Overall Length	535mm	
Weight	9.4kg	
Standard Accessories	Side Handle, Stopper, Rotary Hammer Grease A, Carrying Case	



MRP: ₹ 60,080/-

Cutting

Planing &
Routing

Miscellaneous

Pneumatic

DH 45ME 45mm Rotary Hammer



Features

- Maintains the speed and performance even at voltage drop
- Power lamp lights up when the plug is inserted into an outlet
- Large mode change lever
- Large trigger switch



BRUSHLESS

Specifications		
Capacity	Drill bit	45mm
	Core bit	125mm
Power Input	1,500W	
Bit Shank	SDS max	
No Load Speed	220V: 120 - 310/min	
Full Load Impact rate	220V: 1,200 - 2,950/min	
Overall Length	535mm	
Weight	9.0kg	
Standard Accessories	Side Handle, Stopper, Rotary Hammer Grease A, Carrying Case	



MRP: ₹ 72,450/-

DH 52ME
52mm Rotary Hammer

FHB **LVH**
ALUMINUM HOUSING BODY LOW VIBRATION HANDLE
BRUSHLESS



Features

- Maintains the speed and performance even at voltage drop
- Power lamp lights up when the plug is inserted into an outlet
- Large mode change lever
- Large trigger switch



Specifications		
Capacity	Drill bit	52mm
	Core bit	160mm
Power Input	1,500W	
Bit Shank	SDS max	
No Load Speed	220V: 110 - 280/min	
Full Load Impact rate	220V: 1,000 - 2,400/min	
Overall Length	585mm	
Weight	11kg	
Standard Accessories	Side Handle, Stopper, Rotary Hammer Grease A, Carrying Case	

MRP: ₹ 94,990/-



Double Insulation



Electronic Constant Speed Control



Slip Clutch



Shock-Absorbing Handle Type



SDS max Shank



2-speed Gear



Cordless

Chargers/
Batteries

Drilling

Demolition

Fastening

Grinding

Polishing &
Sanding

Sawing

Cutting

Planing &
Routing

Miscellaneous

Pneumatic



HIKOKI

UVP

H41 SST
Demolition Hammer



374098

Features

- 1,010w high power input
- Low vibration handle (LVH) for less user fatigue
- Soft-grip side handle



Specifications	
Power Input	1,010W
Full Load Impact Rate	2,900/min
Bit Shank	17mm Hex
Overall Length	458mm
Weight	5.7kg with side handle, without cord
Standard Accessories	Bull Point, Flat Chisel, Side Handle, Wrench, Grease, Carrying Case

MRP: ₹ 20,790/-

H41 MB2
Demolition Hammer



999108

Features

- Lightweight for less fatigue
- Resin cylinder case cover
- Multiple bit-angle settings



Specifications	
Power Input	950W
Full Load Impact Rate	3000/min
Bit Shank	SDS max
Overall Length	427mm
Weight	5.2kg
Standard Accessories	Side Handle, Bull Point, Carrying Case

MRP: ₹ 39,780/-

H60 MC (V)
Demolition Hammer



999044

Features

- Easy to change tool by single-step holder
- Variable lock mechanism to adjust tool at 2-step angle
- Functional and robust design
- Variable speed
- Robust & Sturdy operational suitability



Specifications	
Power Input	1,250W
Full Load Impact Rate	1,600/min
Bit Shank	SDS max
Overall Length	570mm
Weight	11.3kg
Standard Accessories	Side Handle, Carrying Case, Bull Point

MRP: ₹ 55,200/-



17mm hex shank

Cordless
Chargers/
Batteries
Drilling
Demolition
Fastening
Grinding
Polishing &
Sanding
Sawing
Cutting
Planing &
Routing
Miscellaneous
Pneumatic

DEMOLISHING TOOLS

Cordless

Chargers/
Batteries

Drilling

Demolition

H 60ME Demolition Hammer



LVH AHB
LOW VIBRATION HANDLE FLUOROPOLYMER BODY
BRUSHLESS

Features

- Compatible with engine generators
- Power lamp lights up when the plug is inserted into an outlet
- One push action for quick bit mounting
- Tool bit angle adjustment
- Large trigger switch



Specifications	
Power Input	1,500W
Full Load Impact Rate	1,500-2,100/min
Bit Shank	SDS max
Overall Length	585mm
Weight	11.6kg
Standard Accessories	Bull Point, Side Handle, Carrying Case

MRP: ₹ 68,000/-

Fastening

Grinding

Polishing &
Sanding

Sawing

PH 65A Demolition Hammer

999044



Features

- Heavy blow chipping mechanism
- Durable tool retainer
- Adjustable side handle



Specifications	
Power Input	1,240W
Full Load Impact Rate	1,400/min
Bit Shank	30mm Hex
Overall Length	642mm
Weight	15.0kg
Standard Accessories	Bull Point, Side Handle, Wrenches, Oil Feeder, Carrying Case

MRP: ₹ 68,440/-

Cutting

Planing &
Routing

Miscellaneous

Pneumatic

H 65SB3 Demolition Hammer

999086

AUTO STOP



AHB
FLUOROPOLYMER BODY

UVP
USER VIBRATION PROTECTION

Features

- Due to the large heavyweight (cylindrical) striker, the chisel easily cuts into concrete, which makes users feel more comfortable during demolition work
- Lock-on button allows continuous operation without holding the switch lever
- Soft grip handles for more comfort
- Large switch lever for more control



Specifications	
Power Input	1,340W
Full Load Impact Rate	1,400/min
Bit Shank	30mm Hex
Overall Length	731mm
Weight	18.0kg
Standard Accessories	Bull Point, Carrying Case

MRP: ₹ 89,210/-



H 90SG
Demolition Hammer

999086 



Features


- High demolition performance
- Soft grip handles for more comfort
- Large switch lever for more control

UVP **FAHB**
ULTRA VIBRATION PROTECTION FULL HOUSING BODY

Specifications	
Power Input	110V : 1,560W, 1,670W 120V, 127V : 1,800W 220V, 230V, 240V : 2,000W
Bit Shank	28.5 Hexagon
Full Load Impact Rate	1,000/min
Overall Length	860mm
Weight	32.0kg
Standard Accessories	Hex. Bar Wrench



MRP: ₹ 1,60,680/-



28.5mm hex shank



Cordless

Chargers/
Batteries

Drilling

Demolition

Fastening

Grinding

Polishing &
Sanding

Sawing

Cutting

Planing &
Routing

Miscellaneous

Pneumatic

SCREW DRIVER / IMPACT WRENCH

W 6VA4 6mm Screw Driver

999091 
AUTO STOP



Features

- Detachable nose piece for easy to change and adjust a bit
- Soft grip handle
- Aluminium gear cover for durability
- Large trigger switch



Specifications		
Capacity	Drywall Screw	6mm
	Self-Drilling Screw	6mm
Bit Shank	6.35mm Hex	
Power Input	620W	
No Load Speed	0-3,000/min	
Overall Length	294mm	
Weight	1.4kg	
Standard Accessories	Driver Bit, Magnetic Bit Holder, Sub Stopper	

MRP: ₹ 16,650/-

WR 22SE 22mm Impact Wrench

Sq
19mm



Features

- Stable performance provided even at voltage drops
- Soft grip handle
- Tumbler-type forward/reverse switch
- Compatible with engine generators



FHB
ALUMINIUM-HOUSING-BODY
BRUSHLESS

Specifications		
Capacity	Ordinary Bolt	14-24mm
	High Tension Bolt	16-22mm
Tightening Torque	620Nm	
Square Drive	19mm	
Power Input	800W	
No Load Speed	1,400/min	
Impact Rate	2,000/min	
Overall Length	280mm	
Weight	5.2kg	
Standard Accessories	Side Handle, Carrying Case	

MRP: ₹ 60,690/-

WR 25SE 25mm Impact Wrench

Sq
25.4mm



Features

- Stable performance provided even at voltage drops
- Soft grip handle
- Tumbler-type forward/reverse switch
- Compatible with engine generators



FHB
ALUMINIUM-HOUSING-BODY
BRUSHLESS

Specifications		
Capacity	Ordinary Bolt	22-30mm
	High Tension Bolt	22-24mm
Tightening Torque	1,000Nm	
Square Drive	25.4mm	
Power Input	900W	
No Load Speed	1,100/min	
Impact Rate	1,500/min	
Overall Length	340mm	
Weight	8.4kg	
Standard Accessories	Side Handle, Carrying Case	

MRP: ₹ 94,500/-

HIKOKI



GRINDING TOOLS

DISC GRINDER

Cordless

G 10SS2

100mm Disc Grinder with Slide Switch



999067 

Features

- Newly-designed large fan and optimized air flow ensure efficient motor cooling for a long lifetime
- Small grip circumference of 197mm



Specifications

Capacity	Wheel Dia	100mm
	Hole Dia	16mm
Spindle Thread	M10 x 1.5	
Power Input	600W	
No Load Speed	11,500/min. : 220-240V	
Overall Length	254mm	
Weight	1.7kg	
Standard Accessories	Side Handle, Wrench	

MRP: ₹ 3,900/-

Chargers/
Batteries

Drilling

Demolition

PDA-100M

100mm Disc Grinder with Snap Switch



999021 

Features

- 100mm, 715W mini grinder
- Snap switch easy to use
- Excellent overload durability



Specifications

Capacity	Wheel Dia	100mm
	Hole Dia	16mm
Spindle Thread	M10 x 1.5	
Power Input	715W	
No Load Speed	12,000/min.	
Overall Length	260mm	
Weight	1.5kg	
Standard Accessories	Depressed Center Wheel, Wrench	

MRP: ₹ 5,700/-

Fastening

Grinding

Polishing &
Sanding

G 10SN2

100mm Disc Grinder with Slide Switch



999005 

Features

- High power 900W motor provides more efficient work



Specifications

Capacity	Wheel Dia	100mm
	Hole Dia	16mm
Spindle Thread	M10 x 1.5	
Power Input	900W	
No Load Speed	10,500/min	
Overall Length	266mm	
Weight	1.8kg	
Standard Accessories	Side Handle, Depressed Center Wheel, Wrench	

MRP: ₹ 7,400/-

Sawing

Cutting

Planing &
Routing

Miscellaneous

Pneumatic



G 10VE2
100mm Electronic
Disc Grinder with
Slide Switch



BRUSHLESS

Features

- 3-position side handle
- Kickback protection
- Durable and dust resistant design
- Small grip circumference for more comfort and control
- Variable speed control
- Restart protection
- Soft Start
- After the motor has stopped due to over loading, it gets auto activated if load reduce within 1.5 seconds



Specifications		
Capacity	Wheel Dia	100mm
	Hole Dia	16mm
	Thickness	6mm
Spindle Thread	M10 x 1.5	
Power Input	1,320W	
Max Power Output	1,900W	
No Load Speed	2,800 - 10,000/min	
Overall Length	309mm	
Weight	1.8kg	
Standard Accessories	Wheel Guard, Side Handle, Wrench	

MRP: ₹ 16,000/-

PDA-125M
125mm Disc Grinder
with Snap Switch



999021

Features

- 125mm, 715W grinder
- Snap switch that is easy to use
- Outer carbon brush for easy maintenance



Specifications		
Capacity	Wheel Dia	125mm
	Hole Dia	22.23mm
Spindle Thread	M14 x 2	
Power Input	715W	
Overall Length	260mm	
Weight	2.1kg	
Standard Accessories	Side Handle, Wrench	

MRP: ₹ 7,500/-

G 13SR4
125mm Disc Grinder
with Slide Switch



999067


Features

- Newly-designed large fan and optimized air flow ensure efficient motor cooling for a long lifetime
- Small grip circumference of 197mm



Specifications		
Capacity	Wheel Dia	125mm
	Hole Dia	22.23mm
Spindle Thread	M14 x 2	
Power Input	730W	
No Load Speed	10,000/min.	
Overall Length	258mm	
Weight	1.8kg	
Standard Accessories	Side Handle, Wrench	

MRP: ₹ 6,720/-



Cordless
Chargers/
Batteries
Drilling
Demolition
Fastening
Grinding
Polishing &
Sanding
Sawing
Cutting
Planing &
Routing
Miscellaneous
Pneumatic

DISC GRINDER

Cordless

G 13SW

125mm Disc Grinder with Slide Switch

999088 



Features

- Max power output 1,600W
- Tool-less wheel guard
- Vibration-Absorbing side handle
- Small grip circumference (202mm) for more control and comfort



Specifications

Capacity	Wheel Dia	125mm
	Hole Dia	22.2mm
Spindle Thread	M14 x 2	
Power Input	1,200W	
No Load Speed	12,000/min	
Overall Length	277mm	
Weight	2.3kg	
Standard Accessories	Side Handle, Depressed Center Wheel, Wrench	

MRP: ₹ 8,820/-

Fastening

G 13SB4

125mm Disc Grinder with Slide Switch

999088 



Features

- Toolless wheel guard
- Excellent overload durability
- Improved dust protection against short circuit



Specifications

Capacity	Wheel Dia	125mm
	Hole Dia	22.2mm
Spindle Thread	M14 x 2	
Power Input	1,400W	
No Load Speed	11,500/min	
Overall Length	288mm	
Weight	2.4kg	
Standard Accessories	Side Handle, Depressed Center Wheel, Wrench	

MRP: ₹ 9,740/-

Cutting

G 15SA2

150mm Disc Grinder with Trigger Switch

999043 



Features

- Max power output 2,100W
- 3-position side handle
- New dust seal design



Specifications

Capacity	Wheel Dia	150mm
	Hole Dia	22.2mm
Spindle Thread	M14 x 2	
Power Input	1,200W	
No Load Speed	8,500/min	
Overall Length	391mm	
Weight	2.8kg	
Standard Accessories	Side Handle, Depressed Center Wheel, Wrench	

MRP: ₹ 13,220/-



Grinding

Polishing & Sanding

Sawing

Planing & Routing

Miscellaneous

Pneumatic

Chargers/ Batteries

Drilling

Demolition

G 18ST
180mm Disc Grinder
with Trigger Switch

999059 



Features

- Halved stator coils for sufficient cooling efficiency increase motor durability
- Motor is protected from dust and debris through the labyrinth construction
- Large switch lever for more control



Specifications		
Capacity	Wheel Dia	180mm
	Hole Dia	22.23mm
Spindle Thread	M14 x 2	
Power Input	2,000W	
No Load Speed	8,500/min	
Overall Length	469mm	
Weight	4.9kg	
Standard Accessories	Side Handle, Wrench	

MRP: ₹ 10,820/-

G 18SH2
180mm Disc Grinder
with Trigger Switch

999061 



Features

- Designed with reliability & robustness
- Increased service life of carbon brush
- Dust proof construction



Specifications		
Capacity	Wheel Dia	180mm
	Hole Dia	22.23mm
Spindle Thread	M14 x 2	
Power Input	2,000W	
No Load Speed	8,500/min	
Overall Length	463mm	
Weight	4.3kg	
Standard Accessories	Side Handle, Wrench	

MRP: ₹ 14,050/-

G 18BYE

999061 



Features

- Safety function - Brake function, kickback protection system, 0 voltage restart protection, overload protection & Over heat protection
- Soft start
- Tool less wheel guard
- Detachable filter



Specifications		
Capacity	Wheel Dia	180mm
	Hole Dia	22.23mm
Spindle Thread	M14 x 2	
Power Input	2,200W	
No Load Speed	6600/min	
Overall Length	468mm	
Weight	4kg	
Standard Accessories	Depressed center Wheel, Side Handle, Wrench	

MRP: ₹ 26,700/-



Double Insulation



Spindle Lock

Cordless
Chargers/
Batteries
Drilling
Demolition
Fastening
Grinding
Polishing &
Sanding
Sawing
Cutting
Planing &
Routing
Miscellaneous
Pneumatic

LARGE ANGLE GRINDERS

Cordless

G 18SW2 180mm Disc Grinder with Trigger Switch

Chargers/
Batteries

999059 



Drilling

Features

- Halved stator coils for sufficient cooling efficiency increase motor durability
- Motor is protected for dust and debris through the labyrinth construction
- Soft grip handle
- Large switch lever for more control



Demolition

Specifications		
Capacity	Wheel Dia	180mm
	Hole Dia	22.23mm
Spindle Thread	M14 x 2	
Power Input	2,200W	
No Load Speed	8,500/min	
Overall Length	469mm	
Weight	4.9kg	
Standard Accessories	Side Handle, Wrench	

MRP: ₹ 14,500/-

Fastening

G 18SE4 180mm Disc Grinder with Trigger Switch

Grinding

999061 



Polishing &
Sanding

Features

- Small and high power split core motor provides less weight
- Vibration-absorbing side handle
- Tool-less wheel guard



Sawing

Specifications		
Capacity	Wheel Dia	180mm
	Hole Dia	22.23mm
Spindle Thread	M14 x 2	
Power Input	2,400W	
No Load Speed	8,500/min	
Overall Length	492mm	
Weight	5.9kg	
Standard Accessories	Side Handle, Wrench	

MRP: ₹ 16,830/-

Cutting

G 23ST 230mm Disc Grinder with Trigger Switch

Planing &
Routing

999059 



Miscellaneous

Features

- Halved stator coils for sufficient cooling efficiency increase motor durability
- Motor is protected for dust and debris through the labyrinth construction
- Large switch lever for more control



Pneumatic

Specifications		
Capacity	Wheel Dia	230mm
	Hole Dia	22.23mm
Spindle Thread	M14 x 2	
Power Input	2,000W	
No Load Speed	6,600/min	
Overall Length	469mm	
Weight	5.1kg	
Standard Accessories	Side Handle, Wrench	

MRP: ₹ 13,430/-

G 23SC4
230mm Disc Grinder
with Trigger Switch

999061 



Features

- Small and high power split core motor provides less weight
- Vibration-absorbing side handle
- Tool-less wheel guard



Specifications		
Capacity	Wheel Dia	230mm
	Hole Dia	22.23mm
Spindle Thread	M14 x 2	
Power Input	2,400W	
No Load Speed	6,600/min	
Overall Length	492mm	
Weight	6.1kg	
Standard Accessories	Side Handle, Wrench	

MRP: ₹ 17,340/-

GP 2S2
25mm Hand Grinder

999088 



Features

- All ball bearing construction
- Easy-to-grip housing
- Internal carbon brush



Specifications		
Capacity	Collet Chuck	6mm
	Max. Wheel Dia	25mm
Power Input	520W	
No Load Speed	29,000/min	
Overall Length	359.4mm	
Weight	1.7kg	
Standard Accessories	Side Handle, Wrenches	

MRP: ₹ 14,630/-

GP 3V
25mm Electronic Hand Grinder

BRUSHLESS



Features

- Power Input 760W
- Brushless motor technology
- Variable speed by dial
- Easy to grip housing
- Electronic control soft start & constant speed



Specifications		
Capacity	Collet Chuck	6mm
	Max. Wheel Dia	25mm
Power Input	760W	
No Load Speed	7,000-29,000/min	
Overall Length	406mm	
Weight	1.8kg	
Standard Accessories	Side handle, collet chuck, Wrenches	

MRP: ₹ 19,980/-

HiKOKI



HiKOKI
SV 13YA 125mm RANDOM ORBIT SANDER
230V~ 50Hz
230W 7000-12000/min
Koki Holdings Co., Ltd. 2017
CAUTION
Read thoroughly HANDLING INSTRUCTIONS
before use. C330254

POLISHING / SANDING

S 15SB
150mm Sander Polisher

999043 



Features

- Max power output 900W
- A metal bush on a ball bearing for durability
- Soft grip handle



Specifications		
Capacity	Sanding Disc	150mm
Spindle Thread	M16x2	
Power Input	705W	
No Load Speed	4,500/min	
Overall Length	194mm	
Weight	2.0kg	
Standard Accessories	Side Handle, Rubber Pad, Sanding paper, Wrench	

MRP: ₹ 17,860/-

SAT 180
180mm Sander Polisher

999043 



Features

- For sanding and polishing
- 2-Speed: High and Low



Specifications		
Capacity	Sanding Disc	180mm
	Wool Bonnet	180mm
Spindle Thread	M14x2	
Power Input	705W	
No Load Speed	Lo: 1,900/min. Hi: 3,400/min	
Overall Length	395mm	
Weight	2.9kg	
Standard Accessories	Side Handle, Rubber Pad, Wool Bonnet, Sanding Discs, Wrenches	

MRP: ₹ 14,400/-

SP 18VA
180mm Electronic Sander Polisher

999043 



Features

- Max power output 2,560W
- For sanding and polishing
- Overload protection
- 2 ways of changing speed: Trigger and dial
- Durable bearing design



Specifications		
Capacity	Sanding Disc	180mm
	Wool Bonnet	180mm
Spindle Thread	M14x2	
Power Input	1,250W	
No Load Speed	0-3,400/min.	
Overall Length	415mm	
Weight	2.8kg	
Standard Accessories	Loop Handle, Rubber Pad, Wool Bonnet, Sanding Disc, Wrench	

MRP: ₹ 19,660/-

ORBITAL SANDERS

SV 12SG 110mm Orbital Sander

999041 



Features

- Large soft grip for comfort and control
- Dust collection



Specifications		
Capacity	Pad Size	110x100mm
	Orbit Dia.	1.5mm
Power Input	200W	
No Load Speed	Spindle	14,000/min
	Orbit	28,000/min
Overall Length	137mm	
Weight	1.1kg	
Standard Accessories	Sanding Paper, Dust Bag	

MRP: ₹ 6,930/-

SV 13YA 125mm Random Orbital Sanders

999041 



Features

- Random orbit sanding action
- Large soft grip for comfort and control
- Dust collection



Specifications		
Capacity	Sanding Disc	125mm
Power Input	230W	
No Load Speed	7,000-12,000/min	
Overall Length	415mm	
Weight	1.4kg	
Standard Accessories	Sanding Paper, Dust Bag	

MRP: ₹ 9,990/-

SB 8V2 76mm Belt Sander

999043 



Features

- Sanding position visible through transparent cover
- Variable speed dial
- Dust bag on the left of the tool body for sanding at corner
- Width 171mm



Specifications		
Capacity	Belt Size	76 x 533mm
Power Input	1,020W	
No-Load Belt Speed	250-450m/min	
Overall Length	318mm	
Weight	4.5kg	
Standard Accessories	Sanding Belt, Dust Bag	

MRP: ₹ 19,660/-



HIKOKI



SAWING TOOLS

SAWING TOOLS

Cordless

C 7SS 190mm Circular Saw

999043 



Features

- Rigid aluminium base for fine cut
- Side handle easy to grip
- Backward dust emission



Specifications		
Capacity	Blade Dia.	190mm
	Max Cutting depth 90°	68mm
	Max Cutting depth 45°	46mm
Bevel Capacity	0-45°	
Power Input	1,050W	
No Load Speed	5,500/min.	
Overall Length	291mm	
Weight	3.4kg	
Standard Accessories	Blade, Guide, Wrench	

MRP: ₹ 7,830/-

Chargers/
Batteries

Drilling

Demolition

Fastening

C 7ST 185mm Circular Saw

999043 



Features

- Power input 1,710W
- Enhanced max cut depth
- Soft grip handle for reduced vibration & increased comfort



Specifications		
Capacity	Blade Dia.	185mm
	Max Cutting depth 90°	62mm
	Max Cutting depth 45°	47.5mm
Bevel Capacity	0-45°	
Power Input	1,710W	
No Load Speed	6,000/min	
Overall Length	310mm	
Weight	4.3kg	
Standard Accessories	Blade, Guide, Wrench	

MRP: ₹ 12,000/-

Grinding

Polishing &
Sanding

Sawing

Cutting

C 9SA3 235mm Circular Saw

999038 



Features

- 4m cord
- Convenient cord holder
- Aluminium saw cover
- Soft grip handle
- Large knob easy to adjust cut depth



Specifications		
Capacity	Blade Dia.	235mm
	Max Cutting depth 90°	86mm
	Max Cutting depth 45°	65mm
Power Input	2,000W	
No Load Speed	5,200/min	
Overall Length	397mm	
Weight	7.0kg	
Standard Accessories	Blade, Side Handle, Guide, Bolt, Wrench, Dust Collector, Short Lever	

MRP: ₹ 22,000/-

Planing &
Routing

Miscellaneous

Pneumatic



C 10FCE2
255mm Compound
Miter Saw

999065 



Features

- Thumb actuated positive miter stops for quick and easy adjustment
- Soft grip handle
- Equipped with chip deflector
- Pivoting Sub-Fence for supporting larger stock



Specifications		
Capacity	Blade Dia.	255mm
	(HxW) Cross Cut 0°	59 x 144mm or 89 x 101mm
	(HxW) Miter Cut 45°	59 x 102mm or 89 x 70mm
	(HxW) Miter Cut 52°	59 x 89mm or 89 x 54mm
	(HxW) Bevel Cut 45°	41 x 144mm
	Compound Miter 45° and Beve 45°	41 x 102mm
Power Input	1,520W	
No Load Speed	5,000/min	
Miter Angle:	Right	0 – 52°
	Left	0 – 52°
Bevel Angle	Left	0 – 45°
Positive Miter Angle Stop	0, 15, 22.5, 31.6 and 45°	
Dimensions	460 x 628 x 561mm	
Weight	11.5kg	
Standard Accessories	Blade, Dust Bag, Vise Assy, Sub Fence, Wrenches	

MRP: ₹ 26,100/-

C 12FDHB
305mm Compound
Miter Saw

999065 



Features

- Xact Cut LED Shadow Line System - Accurately indicates where the blade will cut on the material
- Compound Cutting - Wide range of miter and bevel cutting options
- Fences - 7" tall sliding fences to support vertically & nested cut molding
- Extra large base for great support & handling of material
- Adjustment - Up-front miter and locks to easily adjust cut angles to best suit the application
- New ergonomic D-handle design for less vibration



Specifications	
Blade Dia.	305mm
Arbor	25.4 mm
No-Load Speed	4,300 RPM
Miter Angle	0-52° L & R
Bevel Angle	0-48° L & R
Cut Capacity at 90°	31.75 x 203mm or 157 x 24mm
Cut at 45° Miter (Left)	32 x109mm or 80 x 20mm
Cut at 45° Miter (Right)	32 x110mm or 100 x 15mm
Cut at 45° Bevel (Left)	0.8 x 203mm
Cut at 45° Bevel (Right)	17 x 203mm
Cut at 45° Miter/Bevel (Left)	20 x109mm
Cut at 45° Miter/Bevel (Right)	109 x17mm
Weight	20 kg

MRP: ₹ 41,000/-

SAWING TOOLS

FCJ 65V3 65mm Jig Saw

999041 



Features

- Variable speed dial
- Large soft grip for comfortable operation
- Motor with two ball-bearings for longer life and efficient power transmission
- Connectable directly with a dust collector without adapter



Specifications		
Capacity	Wood	65mm
	Mild Steel Plate	6mm
	Min. Cutting Radius	25mm
Base Tilt Angle	45° Right/Left	
Power Input	400W	
Length of Stroke	18mm	
No-Load Speed(stroke)	0-3,000/min	
Overall Length	197mm	
Weight	1.5kg	
Standard Accessories	Blade, Splinter Guard, Chip Cover, Wrench	

MRP: ₹ 8,550/-

CJ 90VST2 AC 90mm Jig Saw

999041 




Features

- Variable speed dial
- Larger lever for quick and easy, tool-less blade change
- 4-mode orbital action
- Soft grip handle
- Powerful dust blower keeps debris away



Specifications		
Capacity	Wood	90mm
	Mild Steel Plate	10mm
	Min. Cutting Radius	25mm
Max Cutting Angle	45° Right/Left	
Power Input	705W	
Length of Stroke	26mm	
No-Load Speed(stroke)	850-3,000/min	
Overall Length	215mm	
Weight	2.2kg (without cord)	
Standard Accessories	Blade, Wrench, Carrying Case, Dust Collector	

MRP: ₹ 11,660/-

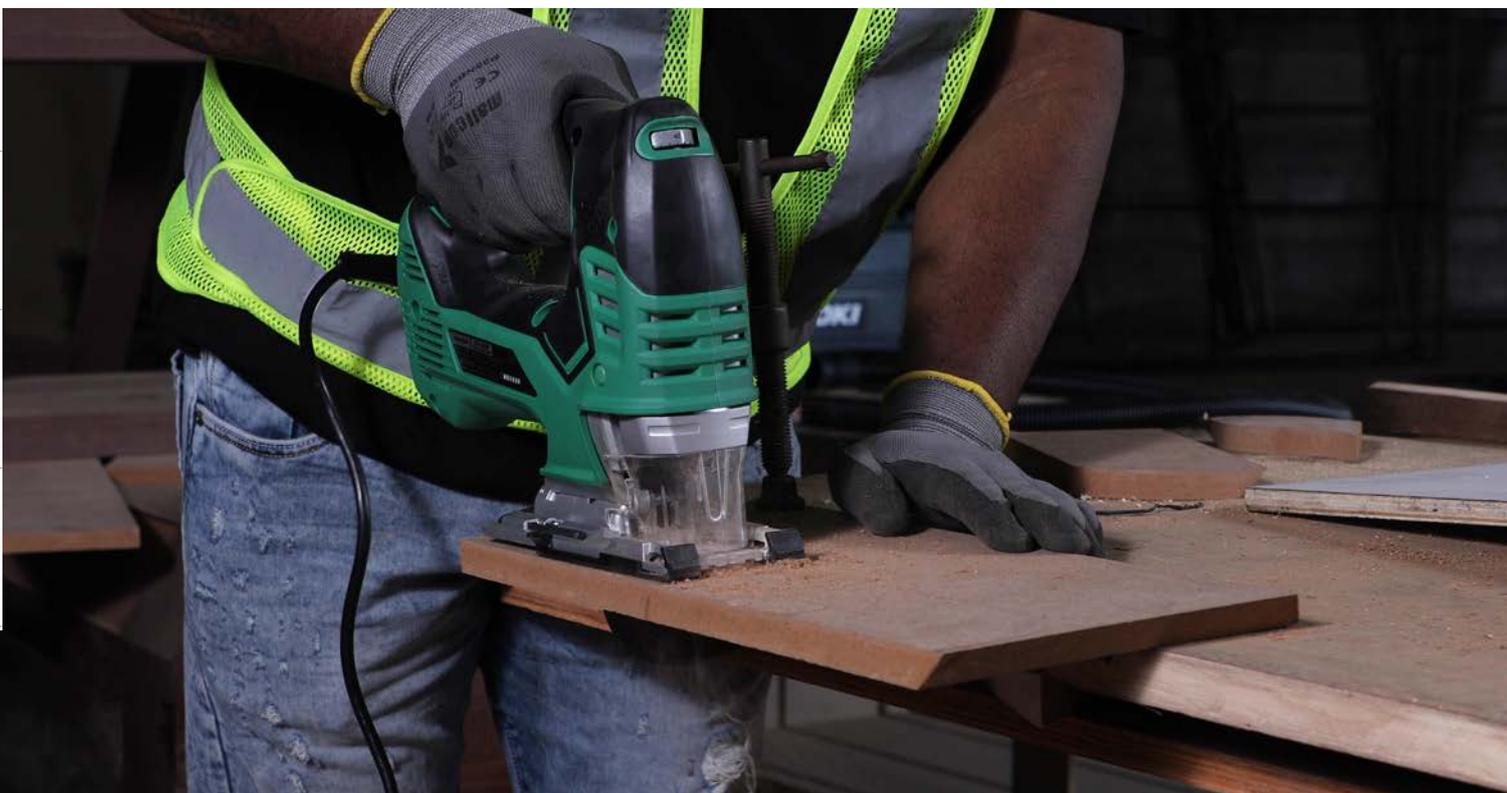

Cordless

Chargers/
Batteries

Drilling

Demolition

Fastening

Grinding

Polishing &
Sanding

Sawing

Cutting

Planing &
Routing

Miscellaneous

Pneumatic

CR 13V2
130mm Reciprocating Saw

999043 



Features

- High cutting speed with Heavy-duty Motor
- Straight cutting action
- Quick blade change by lever
- Blade mount reversible to cut upward or downward
- Large switch to operate in upside-down
- Newly-designed front cover and handle to hold
- 150mm Curved blade included as standard



Specifications		
Capacity	Pipe	130mm
	Steel Plate	19mm
	Wood	300mm
Power Input	1,010W	
Length of Stroke	29mm	
No Load Speed (stroke)	0-2,800/min.	
Overall Length	435mm	
Weight	3.3kg	
Standard Accessories	Blade, Wrenches, Carrying Case	

MRP: ₹ 21,840/-



Double Insulation



Variable Speed



Cordless

Chargers/
Batteries

Drilling

Demolition

Fastening

Grinding

Polishing &
Sanding

Sawing

Cutting

Planing &
Routing

Miscellaneous

Pneumatic

CHAIN SAW / CUTTERS

CS 40Y 400mm Chain Saw

999038 



Features

- Balanced design for more control
- Tool-less chain adjuster
- Large switch lever with soft start and over-load protection
- Chain oil flow adjuster
- Front and rear handles with soft grip



Specifications	
Voltage	230V
Power Input	2,000W
No Load Chain Speed	14.5m/s
Chain Pitch	3/8"
Chain Gauge	0.05"
Guide Bar Length	400mm
Type of Guide Bar	Sprocket Nose
Oil Tank Capacity	150mL
Dimensions (LxWxH)	490x217x220mm
Dry Weight	5.5kg
Standard Accessories	Guide Bar, Saw Chain, Plug Clip Chain Case

MRP: ₹ 19,800/-

CM 4ST 110mm Cutter

999043 



Features

- Dust Proof Switch
- Power input 1,300W with overload durability



Specifications		
Capacity	Wheel Dia.	110mm
	Max Cut Depth	34mm
Power Input	1,300W	
No Load Speed	13,000/min	
Overall Length	214mm	
Weight	2.9kg	
Standard Accessories	Wrench	

MRP: ₹ 6,580/-

CM 4SB2 110mm Cutter

999043 



Features

- Metal bush on a ball-bearing and sealed armature coil for durability
- Soft grip handle
- Tool-less depth adjustment



Specifications		
Capacity	Wheel Dia.	110mm
	Max Cut Depth	34mm
	Cut Depth per cut	20mm
Power Input	1,320W	
No Load Speed	11,500/min	
Overall Length	204mm	
Weight	2.8kg	
Standard Accessories	Water Plug, Rubber Connector, Wrenches, Vinyl Hose	

MRP: ₹ 6,750/-

CC 14STA
355mm High-Speed
Cut-off Machine

370779 

Features

- Lightweight design
- Quick lock vise
- Spark diversion guard
- With Spindle lock mechanism



Specifications	
Capacity : Cut-off Wheel Dia.	355mm
Power Input	2,000W
No Load Speed	3,900/min.
Dimensions (L x W x H)	584 x 287 x 610mm
Weight	14.1kg
Standard Accessories	Cut-off Wheel, Wrench

MRP: ₹ 13,740/-

CC 14STD
355mm High-Speed
Cut-off Machine

370779 

Features

- With powerful motor of 2,200W
- With Spindle lock mechanism
- D-shaped handle
- Quick lock vise
- Spark diversion guard



Specifications	
Capacity : Cut-off Wheel Dia.	355mm
Power Input	2,200W
No Load Speed	3,800/min
Max Working Perphera Speed	4,800m/min.
Dimensions (L x W x H)	590 x 300 x 640mm
Weight	17.0kg
Standard Accessories	Cut-off Wheel, Wrench

MRP: ₹ 17,970/-

CC 14STDU
355mm High-Speed
Cut-off Machine

370779 

Features

- With powerful motor & Soft start
- With Spindle lock mechanism
- D-shaped handle
- Quick lock vise
- Spark diversion guard



Specifications	
Capacity: Cut-off Wheel Dia.	355mm
Power Input	2,200W
No Load Speed	3,800/min
Max Working Perphera Speed	4,800m/min.
Dimensions (L x W x H)	590 x 300 x 650mm
Weight	17.0kg
Standard Accessories	Cut-off Wheel, Wrench

MRP: ₹ 21,740/-

P 20ST
82mm Planer

999021 



Features

- Max cutting depth of 1.5mm
- Compact & light weight
- Rabbeting depth: 9mm
- Easy to adjust cutting depth by knob
- Optional dust bag or elbow can be connected



Specifications	
Capacity: Cutting Width	82mm
Max Cutting Depth	1.5mm
Power Input	580W
No Load Speed	17,000/min
Overall Length	296mm
Weight	2.5kg
Standard Accessories	Blades, Blade Setting Gauge, Guide, Wrench

MRP: ₹ 8,030/-



HIKOKI



MISCELLANEOUS TOOLS

M 12SA2
12mm Router

999044 



Features

- Fine adjustment by knob and lever
- Soft grip handle
- Improved clutches for collet chuck
- Bench stand available as an optional accessory



Specifications	
Capacity: Collet Chuck	12mm
Stroke	65mm
Power Input	1,700W
No Load Speed	22,000/min
Weight	6.2kg
Standard Accessories	2 Collet Chucks, Centering Gauge Straight Guide, Template Guide, Template Guide Adapter, Dust Guide, Dust Guide Adapter, Wrench

MRP: ₹ 20,210/-

M 12SC
12mm Router

999043 



Features

- Powerful motor 900W
- 6mm Collet chuck
- Compact & light weight



Specifications	
Capacity: Collet Chuck	6X12mm
Stroke	65mm
Power Input	900W
No Load Speed	25,000/min
Weight	3.3kg

MRP: ₹ 12,010/-

PRESSURE WASHERS

Cordless

AW 100 High Pressure Washer

335549 



Chargers/
Batteries

Drilling

Demolition

Fastening

Grinding

Features

- Max Pressure 100 Bar & portable
- Vertical type for easy storage
- Built-in thermal protector
- With handle for easy movement
- Rotary ON/OFF switch for convenient use



Specifications

Voltage (by areas)	Single-phase AC 50/60Hz Voltage 220V to 240V
Power Input	1,400W
Max. Discharge Pressure	7.0MPa (1MPa: 10.2 kgf/cm ²)
Max Permissible Pressure	10.0MPa
Max Feed Pressure	0.7MPa
Max Water Discharge	5.5L/min
Permissible Temperature	40°C or less
Water Feeding Method	Faucet connection type
Dimensions (L x W x D)	305 x 245 x 465mm
Weight	5.4kg
Standard Accessories	Trigger gun, High-pressure hose (5m), Variable nozzle, Detergent bottle nozzle, Water feed connector, Nozzle cleaner pin, Cord holder, Gun holder, Handle (with 2 attachment screws)

MRP: ₹ 10,970/-

Polishing &
Sanding

AW 130 High Pressure Washer

335599 



Sawing

Cutting

Planing &
Routing

Miscellaneous

Pneumatic

Features

- Max Pressure 130 Bar
- Washing of the wide range is possible with a long high-pressure hose
- With wheels and handle for easy movement
- With siphon function
- Vertical type for easy storage
- Built-in thermal protector
- With handle for easy movement
- Rotary ON/OFF switch for convenient use



Specifications

Voltage (by areas)	Single-phase AC 50/60Hz Voltage 220V to 240V
Power Input	1,600W
Max. Discharge Pressure	9.0MPa (1MPa: 10.2 kgf/cm ²)
Max Permissible Pressure	13.0MPa
Max Feed Pressure	0.7MPa
Max Water Discharge	6.0L/min
Permissible Temperature	40°C or less
Water Feeding Method	Faucet connection type
Dimensions (L x W x D)	325 x 260 x 790mm
Weight	8.3kg
Standard Accessories	Trigger gun, High-pressure hose (10m), Variable nozzle, Turbo nozzle, Detergent bottle nozzle, One-touch joint (black)(For use with the strainer hose), Water feed connector, Nozzle cleaner pin, Cord holder, Handle (with 4 attachment screws)

MRP: ₹ 18,300/-



AW 150
High Pressure Washer

335599 



Features

- Max Pressure 150 Bar
- Washing of the wide range is possible with a long high-pressure hose
- Variable nozzle (Direct injection / Wide angle) can be used with pressure adjustment
- Large hose reel for convenient storage
- With wheels and handle for easy movement
- With siphon function
- Vertical type for easy storage
- Built-in thermal protector
- With handle for easy movement
- Rotary ON/OFF switch for convenient use



Specifications	
Voltage (by areas)	Single-phase AC 50/60Hz Voltage 220V to 240V
Power Input	2,000W
Max. Discharge Pressure	11.0MPa (1MPa: 10.2 kgf/cm ²)
Max Permissible Pressure	15.0MPa
Max Feed Pressure	0.7MPa
Max Water Discharge	6.67L/min
Permissible Temperature	40°C or less
Water Feeding Method	Faucet connection type
Dimensions (L x W x D)	425 x 345 x 905mm
Weight	12.4kg
Standard Accessories	Trigger gun, High-pressure hose (10m), Variable nozzle (with pressure adjuster), Turbo nozzle, Detergent bottle (stored inside the unit), One-touch joint (black) (For use with the strainer hose), Water feed connector, Nozzle cleaner pin, Gun holder, Hose handle, Gun support (with 1 attachment screw)

MRP: ₹ 34,320/-

- Cordless
- Chargers/ Batteries
- Drilling
- Demolition
- Fastening
- Grinding
- Polishing & Sanding
- Sawing
- Cutting
- Planing & Routing
- Miscellaneous
- Pneumatic

NIBBLER / BLOWER / MIXER

Cordless

CN 16SA 1.6mm (16 Gauge) Nibbler

Chargers/
Batteries

999021 



Drilling

Features

- 3 positive stop die holder allows for straight, right and left cutting
- Downward cutting allows for cutting of trapezoidal metal plate

Demolition

Specifications		
Capacity	Steel	1.6mm
	Stainless	1.2mm
Capacity: Cutting Width	5mm	
Min. Cutting Radius	40mm	
Power Input	400W	
No Load Speed	2,300/min	
Overall Length	250mm	
Weight	1.6kg	
Standard Accessories	2 Hex.Bar Wrenches	

MRP: ₹ 33,960/-

Fastening

RB 40SA Blower

Grinding

999021 



Polishing &
Sanding

Features

- Soft grip handle
- Stands alone
- Heavy duty for industrial cleaning purpose

Sawing

Specifications		
Capacity	Air Pressure	5.5kPa
	Air Volume Flow	3.8m ³ /min
Power Input	550W	
No Load Speed	16,000/min	
Overall Length	447mm	
Weight	1.7kg	
Standard Accessories	Nozzle, Dust Bag	

MRP: ₹ 7,010/-

Cutting

UM 12VST2 120mm Mixer

Planing &
Routing

333631 



Miscellaneous

Features

- Easy-to-operate soft grip handle
- Optimally-positioned variable speed dial
- Steel frame integrated with the handle
- 0-voltage restart protection and overload protection

Pneumatic

Specifications		
Capacity	Max Stirrer Dia.	120mm
Power Input	1,200W	
Tool Spindle Thread	M14	
No Load Speed	High	300 - 650/min
	Low	150 - 300/min
Overall Length	336mm	
Weight	5.4kg	
Standard Accessories	Stirrer	

MRP: ₹ 16,200/-



UM 16VST2
160mm Mixer

333631 



Features

- Easy-to-operate soft grip handle
- Optimally-positioned variable speed dial
- Steel frame integrated with the handle
- 0-voltage restart protection and overload protection



Specifications		
Capacity	Max Stirrer Dia.	160mm
Power Input	1,600W	
Tool Spindle Thread	M14	
No Load Speed	High	300 - 650/min
	Low	150 - 300/min
Overall Length	338mm	
Weight	5.7kg	
Standard Accessories	Stirrer, Extension Bar	

MRP: ₹ 18,550/-

RH 600T
Heat Gun

336607 



Features

- 2 Heat Settings
- Cool air shot for quick cooling down
- Hanging hook for easy storage and stationary use
- Overheating protection
- Soft grip handle for more control and comfort



Specifications		
Voltage	220V-240V	
Power Input	2,000W	
Capacity: Wind Volume	0.25/0.5m³/min (2-stage switch)	
Capacity: Wind Temperature	450/600°C (2-stage switch)	
Wind Temperature (when the cooling button is used)	50°C	
Overall Length	245mm	
Weight	0.57kg	
Standard Accessories*	Nozzle (round), Nozzle (flat), Nozzle (curved surface), Nozzle (glass protector), Scraper (with grip), Carrying Case	

*Standard accessories may vary by country or area

MRP: ₹ 2,540/-

RH 650V
Heat Gun

336609 



Features

- LCD display for showing temperature and wind power settings
- Continuous adjustable temperature and variable air flow for different applications
- Constant Heat Control for continuous work without overheating
- High stability for stationary use
- Soft grip handle for more control and comfort



Specifications		
Voltage	220V-240V	
Power Input	2,000W	
Capacity: Wind Volume	0.25/0.5m³/min (5-stage switch)	
Capacity: Wind Temperature	50 - 650°C (in increments of 10°C)	
Overall Length	245mm	
Weight	0.79kg	
Standard Accessories*	Nozzle (round), Nozzle (flat), Nozzle (curved surface), Nozzle (glass protector), Scraper (with grip), Carrying Case	

*Standard accessories may vary by country or area

MRP: ₹ 6,730/-

TABLE SAW / COMPRESSOR

C 10RJ

AC 254mm Table Saw

Features

- Adjustable rip fence and outfeed support for larger cutting capacity.
- Stable and durable fold and roll stand for easy transportation
- Powerful 1,500W motor



Specifications

Maximum Cutting Capacity	Cutting Depth (90 Degree)	6,500/min
	Cutting Depth (45 Degree)	5,500/min
	Rip fence ext. length (right)	4,000/min
	Rip fence ext. length (left)	559mm
No Load Speed	4,500 (min-1)	
Blade Diameter	254mm	
Blade Bore	30mm	
Dimensions (L x W x H)	920 x 770 x 600mm	
Weight	44kg (includes table)	
Standard accessories*	TCT Saw Blade 254mm, push stick & wrenches	

*Standard accessories may vary by country or area



MRP: ₹ 78,000/-

EC 68

24 LTR Air Compressor

Features

- 24 LTR Tank capacity
- Automatic protection against overload
- Universal socket outlet
- 2 solid rubber wheel for easy transport



Specifications

Type of Motor	Induction
Tank Capacity	24 Ltrs
Air Pressure	8 Bar
Power Input	1.5 hp
Weight	28kg

MRP: ₹ 28,990/-





HiKOKI

HIGH PERFORMANCE POWER TOOLS



Head Quarters:

Koki Holdings Co., Ltd.

Shinagawa intercity Tower A, 20th Floor, 15-1
Konan 2-chrome, Minato-ku, Tokyo 108-6020
Japan.

Tel; +81-3-5783-0601

Fax: +81-3-5783-0709

Website: www.hikoki-powertools.com

Registered & Head Office:

HiKOKI Power Tools India Pvt. Ltd.

No.11, Old No.9A, 1st Main Road, KIADB Peenya 1st Stage,
Bengaluru, Bengaluru Urban - 560058, Karnataka, INDIA.

Tel: 080 - 4117 0777/78 / 2839 6198

Fax: 080 - 4117 1222

Email: ho.mktg@hikoki-powertools.in

WebSite: www.hikoki-powertools.in

BRANCHES

Ahmedabad	: 90999 20372	Guwahati	: 98360 92333
Bangalore	: 90083 04461	Hyderabad	: 98487 12443
Bhubaneshwar	: 98302 00254	Jaipur	: 88240 99593
Chennai	: 99620 92519	Kolkata	: 98311 60116
Cochin	: 95677 61040	Lucknow	: 90267 53265
Delhi	: 97119 18942	Ludhiana	: 76250 01093
Gurgaon	: 97111 92658	Mumbai	: 75960 26989
		Pune	: 97027 86342



For any Customer Support / Service

Toll Free Number

18005725726

Timings: 10am to 6pm

Closed on Saturdays / Sundays and Public holidays.

Authorised distributor :